

# SASE


PRODUCT CATALOG



CONCRETE GRINDING & POLISHING | FLOOR PREPARATION & DEMOLITION | DIAMON TOOLING | CHEMICALS

# VISIT OUR WEBSITE AT

<https://sasecompany.com>

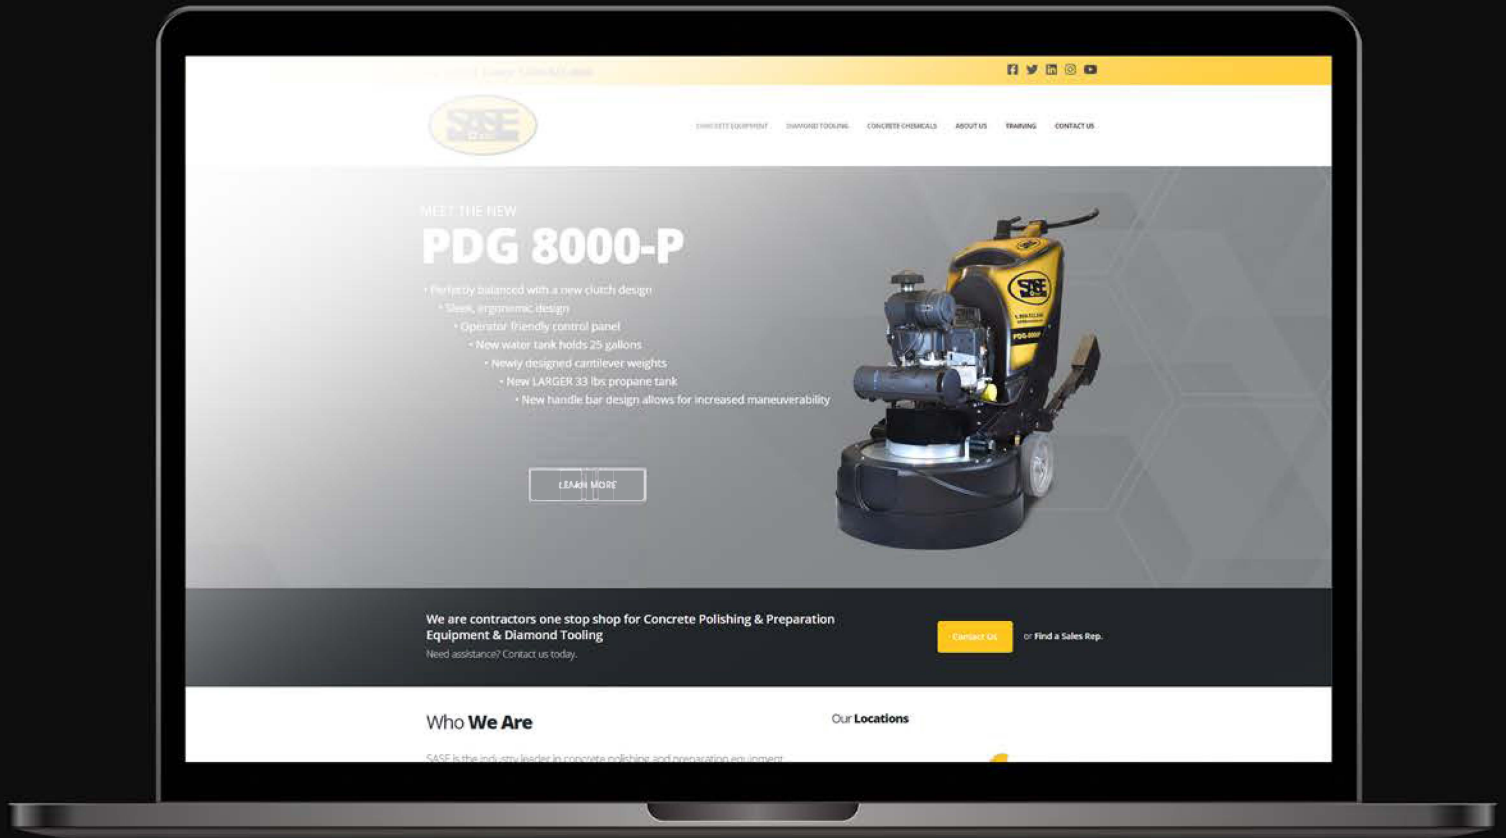

For more product information, downloads, training registrations, quotes, demos and more!

## INTERACT WITH US ONLINE



/SASECompany



@sasecompany



@SASECompany



@sasecompany



/sase-co.-inc.





# SASE® CONTRACTOR TRAINING

**THESE FREE CONTRACTOR TRAINING SEMINARS** are taught by multiple, industry professionals with decades of experience. Each course can be attended individually or both during the same week. Each attendee will receive a physical certificate of completion as well as a copy of training materials covered in the course(s) they attend. Lunch is provided every day as well as a social hour one evening.

## SASE® UNIVERSITY

Perfect for novice to experienced concrete flooring contractors or anyone wanting to learn more about SASE® equipment and tooling.

- Learn about the polished concrete industry
- Introduction to SASE® equipment & tooling
- Hands-on VCT tile & coatings removal
- Hands-on Concrete grinding & polishing procedures (i.e. SASE® Signature Floor System)
- Hands-on wet and dry polishing processes
- Hands-on dying process including multi-layered stencils
- Techniques & troubleshooting on concrete slabs
- Maintenance of polished concrete
- Concrete repair and joint filling

## SASE® SERVICE TRAINING

Perfect for contractors that want to learn about routine maintenance and how to repair SASE® PDG floor grinding and polishing equipment.

- Maintenance training on SASE® planetary floor grinders
- Disassembly & rebuilding of floor grinder drum
- Replacing belts and bearings
- Check list for wear items

## UPDATED INFO AND REGISTRATION AVAILABLE ONLINE

<https://SASEcompany.com/training.html>

## NEED MORE INFORMATION?

☎ 1 (800) 522-2606

## TRAINING DATES

- February 8-9, Rockford, TN
- April 19-20, Farmers Branch, TX
- May 10-11, Rockford, TN
- June 7-8, Aliquippa, PA (Ardex)
- July 19-20, California (Rapidset Location)
- August 16-17, Rockford, TN
- September 13-14, Rockford, TN (Ardex)
- October 18-19, Rockford, TN
- November 15-16, California (Rapidset Location)



# CONTENTS

## SASE LOCATIONS 6 - 7

## METAL BOND DIAMOND TOOLING

Metal Bond Series 8-10

## HYBRID DIAMOND TOOLING

QuikCut® Hybrid Series 12

3" Hybrid Series 13

Pucks Hybrid Series 2" Pucks 14

Hybrid Series 3" C-Bond 15

Hybrid Series 3" EH-Bond 16

## RESIN BOND DIAMOND TOOLING

Triton® Series 2" Pucks 18

Triton® X-Series Pucks 19

Triton® S-Series Pucks 3" 20

Resin Pucks 21

2" Resin Pucks 22

PT Resin Series Pucks 23

Xenith® Pads 24-25

Xenith® MR Pads Galaxy 26

System 27

## WULF® SERIES REMOVAL & PREPARATION TOOLING

Wulf Series PCD's 29

Wulf Series PCD Rings Wulf 30

Series Bush Hammers Wulf 31

Claw Removal Tools Tungsten 32

Scraper Squares 33

## EDGE GRINDING TOOLS

Metal Flex Diamond Pads 35

Resin Bond Diamond Pads 36

Surecut Copper Bond Diamond Pads 37

Hybrid Edge Pads 38

Honeycomb Pads 39

Quikcut® Cup Wheels 40

7" Cup Wheels 41

5" Cup Wheels 42

Corner Grinding Polishing Pads 43

## FLOOR PADS

Trifecta® Diamond Pads 45-46

Diamond Floor Pads 48

## TOOLING PLATES & HOLDERS 47-50

## TOOLING USE CHART 51

## CONCRETE GRINDERS & POLISHERS

PDG 9500 Plus 53-54

PDG 8000 Propane 55-56

PDG 8000 57-58

8KR 59-60

6KP 61-62

PDG 6000 63-64

PDG 5000 Propane 65-66

PDG 5000 67-68

PDG 3000 69-70

27" Burnisher 72

Spyder 73

SC70 Hand Grinder 74

SC50 Hand Grinder 74

Corner Polisher 75

Hydratrowel Polishing System 77

## DUST EXTRACTORS

Bull 1250 EBS Propane 79-80

Bull 1250 EBS 81-82

Bull 300 EBS 83-84

Bull 240 EBS 85-86

Bull 160 SVP 87-88

Bull Pre-Separator 89-90

Vacuum Wand Parts & Accessories 91

Hose Cuffs & Camlocks 92

Vacuum Dust Bags 93

## SCARIFIERS & SHAVERS

SC320 Scarifier/Shaver	95-96
SC12E Scarifier	97-98
SC10E Scarifier	99-100
SC8E Scarifier	101-102
Assembled Drums, Cutters, Drums & Flail Shafts	103-106

## FLOOR SCRAPERS

Cyclone Floor Scraper	108 - 109
Twister Floor Scraper	110 - 111
Hurricane Floor Scraper	112 - 113
Lightning Floor Scraper	114 - 115
Stinger Floor Scraper	116 - 117
Floor Scraper Blades & Accessories	118

## CONCRETE REPAIR, CHEMICALS & DYES

SASE® All Spall 3	120 - 121
SASE® Flex Joint 85	120 - 121
Poly Pump 10	122 - 123
Joint Saw	124 - 125
Crack Chasing Saw	126 - 127
Saw Blades	128
SASE® GrindAid Rapid Cutting Agent	129
SASE® D1 - Low Solids Densifier	129
SASE® D2 - High Solids Densifier	129
SASE® Protect Select	130
SASE® SPR3	130
SASE® SPR3 WB	130
SASE® Cleaner	130
SASE® Concrete Dyes	131-132
Swissmex 2.4 Gallon Sprayer	133
Handles, Microfiber Heads & Pads / Squeegees	134

## SLURRY MANAGEMENT SOLUTIONS

SlurrySep	135
SlurryDry SSG SlurrySafe	135
AR	135
Slurry Dewater Filter Bags	135

## NEEDLE SCALERS

SC49 Needle Scaler	137
SC28 AVS Needle Scaler	137
SC28 Needle Scaler	138
Needle Scaler Parts & Accessories	138

## SPARE PARTS

Concrete Repair Miscellaneous Items Belts	139
SKF Bearings	139
Seals	140
Spring Sets	140
Shaft Journals	140
Power Cords	140
Vacuum Filters & Parts	141
Plugs / Cord Ends	142
Edge Pro 180 Parts	142
Floor Scraper Belts	143
Miscellaneous Scaler Parts	143
SC320 Parts	143
Scarifier Shafts, Belts, Bearings & Other Parts	144

## TRANSIT INFO

145-146

## WARRANTY INFO

147



# SASE® LOCATIONS



## CONTACT INFORMATION

Monday - Friday 8:00am - 7:00pm EST

1 (800) 522-2606

[Sales@SASECompany.com](mailto:Sales@SASECompany.com)



**SALES, SERVICE, & DISTRIBUTION**

2475 Stock Creek Blvd. Rockford, TN 37853



**ASSEMBLY, MANUFACTURING, SALES, & DISTRIBUTION**

26423 79th Ave. S. Kent, WA 98032



**SALES, SERVICE, & DISTRIBUTION**

377 W Grove Ave. Orange, CA 92865



**SALES, SERVICE, & DISTRIBUTION**

3340 Garden Brook Dr. Farmers Branch, TX 75234



**STOCKING & DISTRIBUTION**

200 Commerce Dr. Freehold, NJ 07728

**STOCKING & DISTRIBUTION**

170 Traders Blvd E, Mississauga,  
ON L4Z 1W7, Canada



**SALES & TECHNICAL SUPPORT**

ADAM HICKS

adamh@sasecompany.com

Mobile: 865-202-0274

Territory: Kansas, Iowa, Nebraska, Oklahoma, & Missouri

BRANDON ROMINES

brandonr@sasecompany.com

Mobile: 865-770-0552

Territory: Maine, Massachusetts, Minnesota, New Hampshire,  
North

CHASE ABRAHAMSON

chasea@sasecompany.com

Mobile: 423-277-6820

Territory: Connecticut, East Pennsylvania, New Jersey, New  
York, & Rhode Island

COREY MYERS

coreym@sasecompany.com

Mobile: 865-333-1465

Territory: Alabama, Arkansas, Louisiana, & Mississippi

DANIEL LANE

daniell@sasecompany.com

Mobile: 423-277-6701

Territory: Tennessee & Georgia

DARYL MEIDINGER

darylm@sasecompany.com

Mobile: 423-277-7866

Territory: Arizona, Colorado, New Mexico, Nevada, Utah, &  
Wyoming

DUSTIN MCMCASTERS

dustinm@sasecompany.com

Mobile: 865-333-1465

Territory: Kentucky, Michigan, Ohio, & Western Pennsylvania

JAY REARDON

jayr@sasecompany.com

Mobile: 253-737-0487

Territory: Alaska, California, & Hawaii

JON SANDVIK

jons@sasecompany.com

Mobile: 206-617-7682

Territory: Idaho, Montana, Oregon, & Washington

MATT BURCH

mattb@sasecompany.com

Mobile: 423-277-3650

Territory: Delaware, Maryland, North & South Carolina,  
Virginia, ia,

MIKE DUKE

miked@sasecompany.com

Mobile: (214) 707-6046

Territory: Texas

PETER ERICSON

petere@sasecompany.com

Mobile: 206-660-0201

Territory: Canada

WES RHINEHART

wesleyr@sasecompany.com

Mobile: 407-808-3429

Territory: Florida, Illinois, & Indiana

# METAL BOND

## DIAMOND TOOLING

SASE® has a complete range of metal bond tooling lines ensuring maximum tooling life on any concrete floor hardness. Every metal bond series corresponds with the MOH'S hardness scale helping contractors confidently know what metal bond series to use on every concrete grinding project.





# METAL BOND DIAMOND TOOLING

**YELLOW SERIES**  
EXTREMELY HARD CONCRETE  
MOH'S 9

**GOLD SERIES**  
HARD CONCRETE  
MOH'S 8

**BLUE SERIES**  
MEDIUM TO HARD CONCRETE  
MOH'S 7

**6**  
GRIT



HOL.502601QCS

**16**  
GRIT



HOL.502630QCS



HOL.502534QCS



HOL.502555QCS



HOL.502549QCS



HOL.502602QCS

**25**  
GRIT



HOL.502631QCS



HOL.502535QCS



HOL.502555QCS



HOL.502549QCS



HOL.502602QCS

**40**  
GRIT



HOL.502632QCS



HOL.502536QCS



HOL.502556QCS



HOL.502550QCS



HOL.502603QCS

**80**  
GRIT



HOL.502633QCS



HOL.502537QCS



HOL.502557QCS



HOL.502551QCS



HOL.502604QCS

**150**  
GRIT



HOL.502634QCS



HOL.502538QCS



HOL.502558QCS



HOL.502552QCS



HOL.502605QCS

**300**  
GRIT



HOL.502559QCS



HOL.502606QCS

**25**  
GRIT  
ARROW



HOL.502621QCS



HOL.502629QCS



HOL.502620QCS



HOL.502628QCS

**RED SERIES**  
MEDIUM CONCRETE  
MOH'S 6

**BLACK SERIES**  
SOFT CONCRETE  
MOH'S 5

**ORANGE SERIES**  
VERY SOFT CONCRETE  
MOH'S 4

**6**  
GRIT



HOL.502612QCS



HOL.502542QCS



HOL.502622QCS



HOL.502607QCS

**16**  
GRIT



HOL.5026125QCS



HOL.5026225QCS



HOL.5026075QCS

**25**  
GRIT



HOL.502613QCS



HOL.502543QCS



HOL.502623QCS



HOL.502608QCS



HOL.502808QCS

**40**  
GRIT



HOL.502614QCS



HOL.502624QCS



HOL.502609QCS



HOL.502809QCS

**80**  
GRIT



HOL.502615QCS



HOL.502625QCS



HOL.502610QCS



HOL.502810QCS

**150**  
GRIT



HOL.502616QCS



HOL.502626QCS



HOL.502611QCS

**300**  
GRIT



HOL.502619QCS



HOL.502627QCS


**25**  
GRIT  
ARROW

**Orange Long Life**

These three segment diamonds were engineered for the most abrasive grinding applications, including "rained-on" concrete, spalled concrete, broom finished concrete and shot-blast floors.

# 3" METAL BOND PUCKS

SASE® 3" Metal Bond Pucks are available in three different bonds covering soft to hard concrete. They are available with SASE® Quick Change System (QCS) attachments or can be ordered to fit any tool holder plate. The SASE® 3" Metal Bond Pucks are great for dry or wet grinding applications.

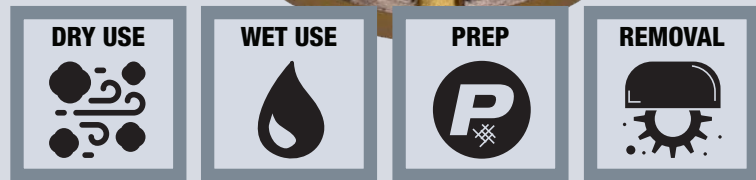

	GOLD SERIES HARD CONCRETE MOH'S 8		BLUE SERIES HARD CONCRETE MOH'S 7		BLACK SERIES SOFT CONCRETE MOH'S 5	
18/20 GRIT						
	HOL.800753	HOL.800754	HOL.800755	HOL.800756	HOL.800757	HOL.800758
30/40 GRIT						
	HOL.800740	HOL.800742	HOL.800744	HOL.800746	HOL.800759	HOL.800760
60/80 GRIT						
	HOL.800741	HOL.800743	HOL.800745	HOL.800747	HOL.800761	HOL.800762
120/150 GRIT						
	HOL.800749	HOL.800750	HOL.800751	HOL.800752	HOL.800763	HOL.800764



SASE® has a complete range of metal bond tooling lines ensuring maximum tooling life on any concrete floor hardness. Every metal bond series corresponds with the MOH'S hardness scale helping contractors confidently know what metal bond series to use on every concrete grinding project.

# HYBRID


## DIAMOND TOOLING

SASE Hybrid tools make the tricky transition between metal diamond tools and resin tools simple. In some cases, our hybrid tools can be used as the initial cut, eliminating the use of metal bond tooling saving material costs on the job. Economical and versatile, view our full line of hybrid diamond tooling below.



# QUIKCUT® HYBRID SERIES

SASE® QuikCut® Hybrids are the perfect transitional diamond when transitioning from metal bond to resin bond diamond tooling. In some applications, QuikCut® Hybrid tools can be used as the initial cut, thus eliminating the use of metal bond tooling saving in material costs.



## 3" QuikCut® Hybrid Diamonds



### Yellow Series (Medium Grit)

For quick, aggressive cutting on new, hard concrete. For Extremely Hard to Hard concrete.

HOL.502832Y



### Black Series (Medium Grit)

For quick, aggressive cutting on new, hard concrete. For Hard to Medium concrete.

HOL.502832B

## 2" QuikCut® Hybrid Diamonds



### Yellow Series (Medium Grit)

For quick, aggressive cutting on new, hard concrete. For Extremely Hard to Hard concrete.

HOL.502838Y



### Black Series (Medium Grit)

For quick, aggressive cutting on new, hard concrete. For Hard to Medium concrete.

HOL.502838B

# QuikCut®



# 3" PUCKS HYBRID SERIES


SASE® Hybrid Series is a complete range of hybrid diamonds from 30 to 400 grit diamonds allowing for transitioning at almost any step. This series is also one of the most economical hybrid lines on the market.



HOL.4005025

### 30 Grit (Lime)

Will remove 40g metal bond scratch pattern. Or a good starting point for cure and seal removal and salt and pepper exposure on new construction concrete slabs.



HOL.400502

### 50 Grit (Grey)

Can be the starting point on a cream or salt and pepper application. Sometimes needed to remove cure and seal from new construction.



HOL.400503

### 100 Grit (Black)

Can be the starting point on a cream exposure application. Removes 50 grit resin scratches as well.



HOL.400504

### 200 Grit (Blue)

Removes 100 grit hybrid scratches preparing the floor for the honing stages.



HOL.400505


### 400 Grit (Red)

Removes 200 grit hybrid scratches preparing the floor for the polishing stages.



# 2" PUCKS HYBRID SERIES

SASE® Hybrid Series is a complete range of hybrid diamonds from 30 to 400 grit diamonds allowing for transitioning at almost any step. This series is also one of the most economical hybrid lines on the market.



HOL.200890

### 30 Grit (Lime)

Will remove 40 grit metal bond scratch pattern. Or a good starting point for cure and seal removal and salt and pepper exposure on new construction concrete slabs.



HOL.200891

### 50 Grit (Grey)

Can be the starting point on a cream or salt and pepper application. Sometimes needed to remove cure and seal from new construction.



HOL.200892

### 100 Grit (Black)

Can be the starting point on a cream exposure application. Removes 50 grit resin scratches as well.



HOL.200893

### 200 Grit (Blue)

Removes 100 grit hybrid scratches preparing the floor for the honing stages.




HOL.200894

### 400 Grit (Red)

Removes 200 grit hybrid scratches preparing the floor for the polishing stages.

# 3" C-BOND HYBRID SERIES


Increase efficiency with the industry's most effective and economical hybrid series, now with a new and improved formula! The SASE® Hybrid Wet C-Bond Series boasts a new and improved formula that includes an exclusive, proprietary copper matrix resulting in up to 300% increase in tooling life and easy and effective transitioning between metal and resin bond steps.

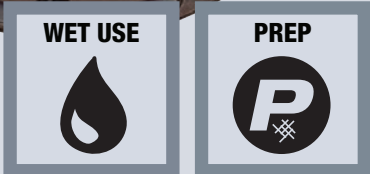

HOL.300600

### 30 Grit (Lime)

This tool is designed for wet operation and can be used to remove cure and seal off new concrete and/or be the initial starting point to expose salt and pepper aggregate. It can also be used to remove 25 grit metal scratches.



HOL.300601

### 50 Grit (Grey)


This tool is designed for wet operation and can be used to remove cure and seal off of new concrete and/or be the initial starting point to expose salt and pepper aggregate. It can also be used to remove 40 grit metal scratches.



HOL.300602

### 100 Grit (Black)


This tool is designed for wet operation and can be used to remove thin cure and seal off of new concrete and/or be the initial starting point to expose little to no aggregate (cream finish). It can also be used to remove 80 grit metal scratches and removal step after a grout coat application.



HOL.300603

### 200 Grit (Blue)


This tool is designed for wet operation and can be used to remove 100 grit hybrid and/or 150 grit metal scratches.



HOL.300604

### 400 Grit (Red)

This tool is designed for wet operation and can be used to remove 200 grit hybrid scratches and in some cases, remove 100 grit hybrid scratches.



HOL.300605

### 800 Grit (White)

Designed to follow up the scratch pattern of the 400g C-bond wet and preparing the floor for a final polish 1500g dry for maximum shine and clarity.

# 3" EH-BOND HYBRID SERIES

The New SASE® Extra Hard Bond (EH) is designed specifically for soft to medium concrete and contains a new matrix with harder metal powders. Available in 50, 100, 200 and 400 grits. For wet use only.



### 50 Grit (Grey)

Engineered for longer life on medium to soft concrete. Hardened binders with new metal powders improving performance on soft concrete.


HOL.300631



### 100 Grit (Black)

Engineered for longer life on medium to soft concrete. Hardened binders with new metal powders improving performance on soft concrete.

HOL.300632



### 200 Grit (Blue)

Engineered for longer life on medium to soft concrete. Hardened binders with new metal powders improving performance on soft concrete.

HOL.300633



### 400 Grit (Red)

Engineered for longer life on medium to soft concrete. Hardened binders with new metal powders improving performance on soft concrete.

HOL.300634



SASE offers the most extensive line of resin bond diamond tooling on the market. Hone and polish concrete under any size floor grinder with our resin diamond tools. Grinding dry? We have a resin tool for that. Grinding wet? We have a resin tool for that too. View our resin bond diamond tools below.

# RESIN BOND

## DIAMOND TOOLING

SASE offers the most extensive line of resin bond diamond tooling on the market. Hone and polish concrete under any size floor grinder with our resin diamond tools. Grinding dry? We have a resin tool for that. Grinding wet? We have a resin tool for that too. View our resin bond diamond tools below.



# TRITON® SERIES 2" PUCKS

SASE® Triton® Series 2" pucks are used for honing and polishing concrete under any size floor grinder. The smaller surface area allows for more down pressure making this resin line more aggressive, especially if a salt and pepper finish is desired.



### 50 Grit (Grey)

Can be the starting point on a cream or salt and pepper application. Sometimes needed to remove cure and seal from new construction.

HOL.200839



### 100 Grit (Black)

Can be the starting point on a cream or salt and pepper application. Removed 50 grit resin scratches.

HOL.200840





# TRITON® X-SERIES PUCKS

The SASE® Triton® X-Series is an expansion for the Triton® Resin series, taking it a step further in results and efficiency. This line of resins not only have great production but also increased life over the Triton® 2” puck.



## 2” Triton® X-Series Pucks




### 800 Grit (White)

Removes 400 grit resin scratches and leaves a high shine. Can be the final step in polishing application.

HOL.200865

## 3” Triton® X-Series Pucks



### 800 Grit (White)

Removes 400 grit resin scratches and leaves a high shine. Can be the final step in polishing application.


HOL.300705



### 3000 Grit (Green)

Removes 1500 grit resin scratches and leaves the highest shine and the final step in polishing application.

HOL.300707



### 1500 Grit (Yellow)

Removes 800 grit resin scratches and leaves a very high shine. Can be the final step in polishing application.


HOL.300706





# TRITON® S-SERIES PUCKS

The SASE® S-Series is the newest resin line for SASE®. It has been formulated to produce the highest shine with increased gloss levels up to 50% higher than other resin diamond tooling. It also includes a 400 grit option allowing for transitioning sooner. It is great for those applications where gloss readings are a major specification factor.

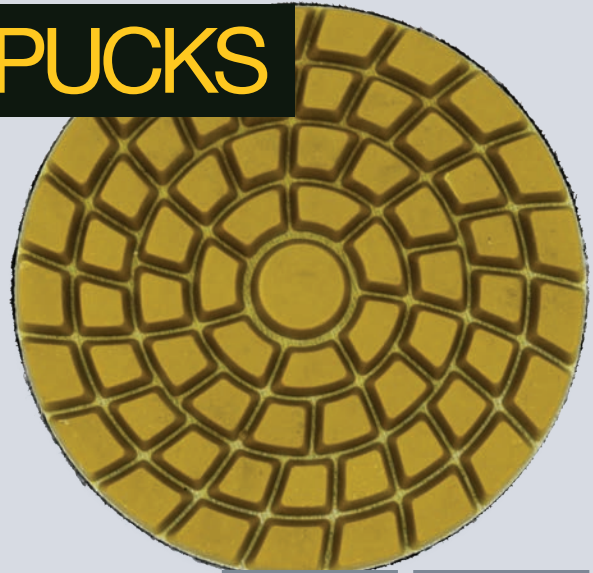


## 3" Triton® S-Series Pucks




**400 Grit (Red)**  
Removes 200 grit resin scratches or next step after transitioning from hybrid resins. Used if higher gloss is required in final steps.

HOL.300724




**800 Grit (White)**  
Removes 400 grit resin scratches and leaves a very high shine. Can be the final step in polishing application. Used if higher gloss is required in final steps.

HOL.300725



**1500 Grit (Yellow)**  
Removes 800 grit resin scratches and leaves a very high shine. Can be the final step in polishing application. Used if higher gloss is required in final steps.

HOL.300726



**3000 Grit (Green)**  
Removes 1500 grit resin scratches and leaves the highest shine and the final step in polishing application. Used if higher gloss is required in final steps.


HOL.300727

## 2" Triton® S-Series Pucks




**1500 Grit (Yellow)**  
Removes 800 grit resin scratches and leaves a very high shine. Can be the final step in polishing application. Used if higher gloss is required in final steps.

HOL.200876




**3000 Grit (Green)**  
Removes 1500 grit resin scratches and leaves the highest shine and the final step in polishing application. Used if higher gloss is required in final steps.

HOL.200877

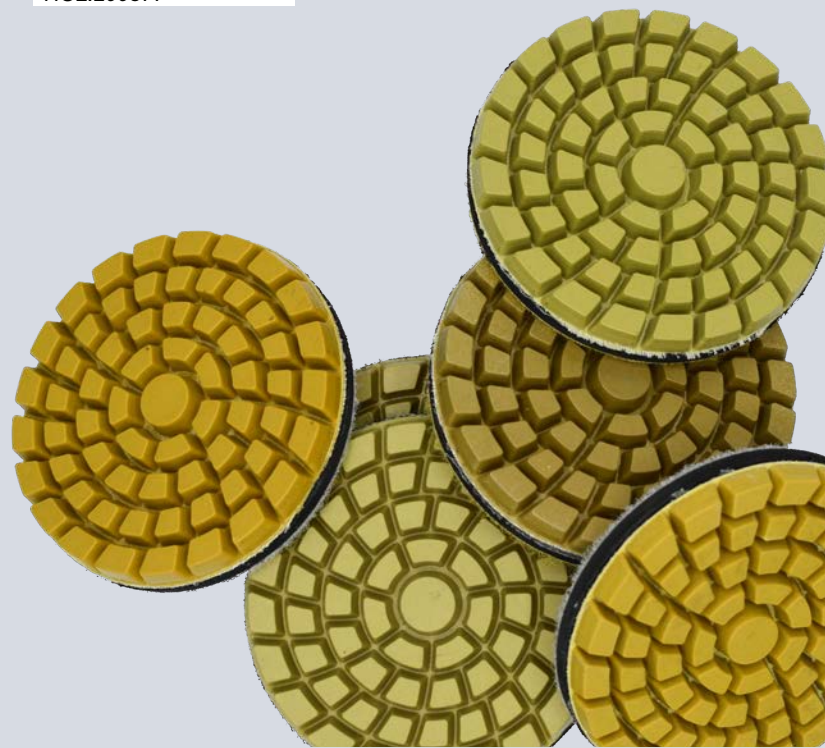

# 3" RESIN PUCKS

The SASE® Resin Series is a standard line of resin tooling great for almost every application. The series is complete from 50 grit up to 3000 grit. It can be used for a cream only finish or leaving a salt and pepper look. It can be used in combination with metals and hybrid diamond tooling for great polish with exposed aggregate.



### 50 Grit (Grey)

Can be the starting point on a cream or salt and pepper application. Sometimes needed to remove cure and seal from new construction.


HOL.502710



### 100 Grit (Black)

Can be the starting point on a cream or salt and pepper application. Removes 50 grit resin scratches.

HOL.502711



### 200 Grit (Blue)

Removes 100 grit resin scratches or next step after transitioning from hybrid resins.


HOL.502712



### 400 Grit (Red)

Removes 200 grit resin scratches or next step after transitioning from hybrid resins.


HOL.502713



### 800 Grit (White)

Removes 400 grit resin scratches and leaves a high shine. Can be the final step in polishing application.


HOL.502714



### 1500 Grit (Yellow)

Removes 800 grit resin scratches and leaves a very high shine. Can be the final step in polishing application.

HOL.502715




### 3000 Grit (Green)

Removes 1500 grit resin scratches and leaves the highest shine and the final step in polishing application.

HOL.502716

# 2" RESIN PUCKS

SASE® 2" Series Resin pucks are used for honing and polishing concrete under smaller floor grinders like the PDG 5000. The smaller surface area allows for more down pressure making this resin line more aggressive, especially if a salt and pepper finish is desired.



### 50 Grit (Grey)

Can be the starting point on a cream or salt and pepper application. Sometimes needed to remove cure and seal from new construction.

HOL.200851



### 100 Grit (Black)

Can be the starting point on a cream or salt and pepper application. Removes 50 grit resin scratches.

HOL.200852



### 200 Grit (Blue)

Removes 100 grit resin scratches or next step after transitioning from hybrid resins.

HOL.200853



### 400 Grit (Red)

Removes 200 grit resin scratches or next step after transitioning from hybrid resins.


HOL.200854





# PT RESIN SERIES PUCKS


Don't waste time watching concrete dry after a wet application! The SASE® PT Resin Bond Series is specifically formulated to be used on damp floors directly after wet application steps. This eliminates down time waiting for the floor to completely dry saving time and labor costs. This series is also great for the final steps when polishing using power trowel equipment.



### 800 Grit (White)

Can be the final step in polishing process after wet, floor grinding application or power trowel application when floor is damp and not fully dry leaving a high shine before applying guard / sealer.


HOL.300755



### 1500 Grit (Yellow)

Can be used dry after PT Resin Bond White - 800 grit leaving a very high shine before applying guard / sealer.


HOL.300756



### 3000 Grit (Green)


Can be used as final step after PT Resin Bond Yellow - 1500 grit leaving the highest shine before applying guard / sealer.

HOL.300757

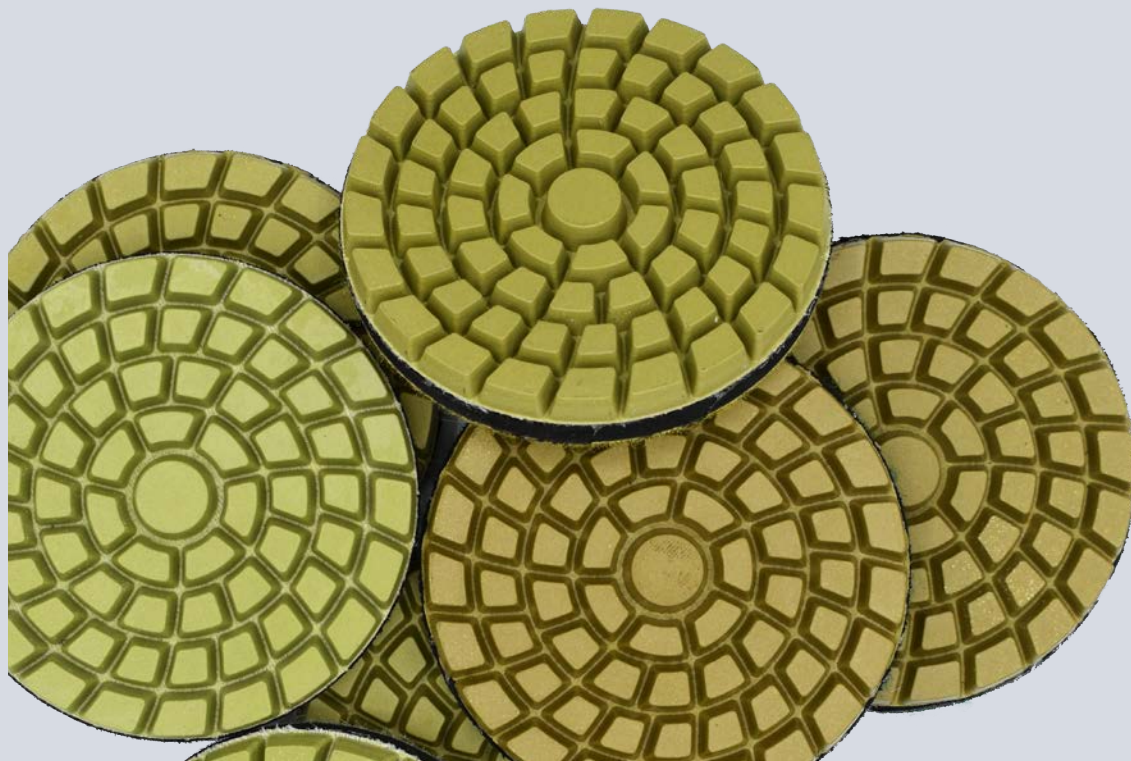







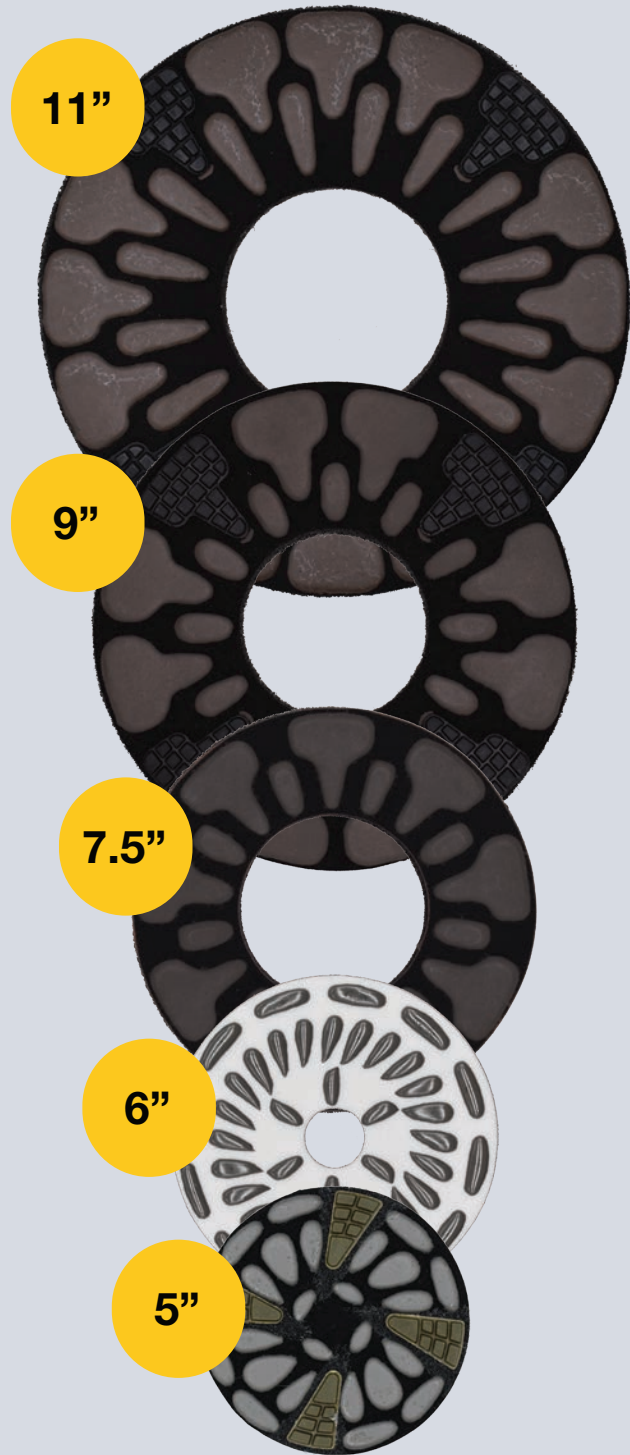
































# XENITH® PADS

The SASE® Xenith® Pads were designed for honing and polishing. They are available in 5 different sizes and a full range of grits. The 11" Xenith® pads are for use under the 8000 series machines or other industry floor grinders with 11" heads. The 9" Xenith® pads were designed specifically for machines that utilize 9" heads. The Xenith® 7.5" pads were developed for use under the PDG 6000, 5000 and SC70 hand grinders. While the 6" were created for the SASE® Edge Pro 180. Finally, the 5" pads were designed for use on the SASE® SC50 hand grinder and PDG-3000.





	11"	9"	7.5"	6"	5"
<b>30</b> GRIT	 HOL.3008715	 HOL.3008645	 HOL.3008505		 HOL.2008115
<b>50</b> GRIT	 HOL.300871	 HOL.300864	 HOL.300850	 HOL.200833	 HOL.200811
<b>100</b> GRIT	 HOL.300872	 HOL.300865	 HOL.300851	 HOL.200834	 HOL.200812
<b>200</b> GRIT	 HOL.300873	 HOL.300866	 HOL.300852	 HOL.200835	 HOL.200813
<b>400</b> GRIT	 HOL.300874	 HOL.300867	 HOL.300853	 HOL.200836	 HOL.200814
<b>800</b> GRIT	 HOL.300875	 HOL.300868	 HOL.300854	 HOL.200837	 HOL.200815
<b>1500</b> GRIT	 HOL.300876	 HOL.300869	 HOL.300855	 HOL.200838	 HOL.200816
<b>3000</b> GRIT	 HOL.300877	 HOL.300870	 HOL.300863	 HOL.200839	 HOL.200817



# XENITH® MR 11" PADS

SASE® Xenith® MR Pads are for use for maintenance and etch repair on polished concrete with SASE® PDG 9500 Plus, 8000 series and other industry floor grinders with 11" grinding heads.



### 50 Grit (Grey)

Removes 30 grit scratches and can be used at the first step in grinding / polishing process. Will also remove cure and seal.

HOL.400880



### 100 Grit (Black)

Removes 50 grit scratches and can be used at the first step in grinding / polishing process on floors that are very flat.

HOL.400881



### 200 Grit (Blue)

Removes 100 grit scratches and will leave a honed matte finish.

HOL.400882



### 400 Grit (Red)

Removes 200 grit scratches and will leave a honed slightly matte finish.

HOL.400883



### 800 Grit (White)

Removes 400 grit scratches and will leave a polished, shiny finish.

HOL.400884



### 1500 Grit (Yellow)

Removes 800 grit scratches and will leave a polished, very shiny finish.

HOL.400885




### 3000 Grit (Green)

Removes 1500 grit scratches and will leave the highest polished finish.

HOL.400886

# GALAXY SYSTEM

The SASE® Galaxy System is a revolutionary rejuvenation system that works with a 27" burnisher running wet and dry during certain steps to achieve a high gloss finish. Get amazing results at a fraction of the equipment cost.



### 3" Resin Bond 50 Grit (Grey)

Good starting point and can remove a cure and seal on new concrete.

SC30.500240



### 3" Resin Bond 100 Grit (Black)

Can be a starting point if floor is in good condition and there is no cure and seal to remove.


SC30.500241



### 3" Resin Bond 200 Grit (Blue)

Removes 100 grit scratches and leaves a honed, matte finish.

SC30.500242



### 3" Resin Bond 400 Grit (Red)

Remove 200 grit scratches and leaves a honed, slightly matte finish.

SC30.500243



### 27" Backer Pad

Holds (15)  
3" Diamond  
Polishing Pads

SSP.279002



### 21" Backer Pad

Holds (10)  
3" Diamond  
Polishing Pads


SSP.219023



### 20" Backer Pad

Holds (10)  
3" Diamond  
Polishing Pads


SSP.209034

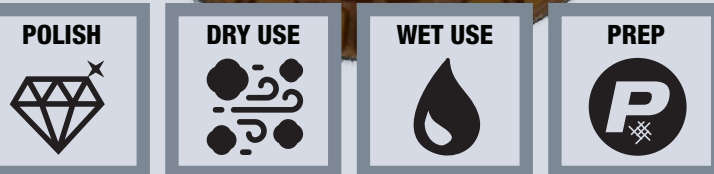

### 3" Resin Bond 800 Grit (White)

Removes 400 grit scratches and leaves a slightly shiny finish. Can be the final step if required.


SC30.500244



### 3" Resin Bond 1500 Grit (Yellow)

Removes 800 grit scratches and leaves a shiny finish. Can be the final step if required.



SC30.500245



### 3" Resin Bond 3000 Grit (Green)

Remove 1500 grit scratches and leaves a high gloss finished. The final step in system.

SC30.500246

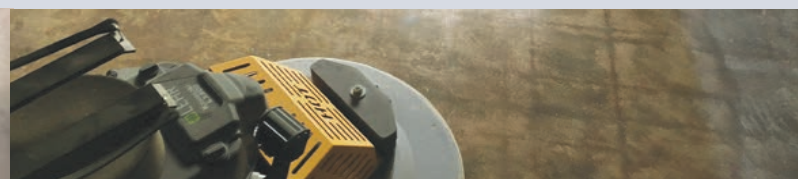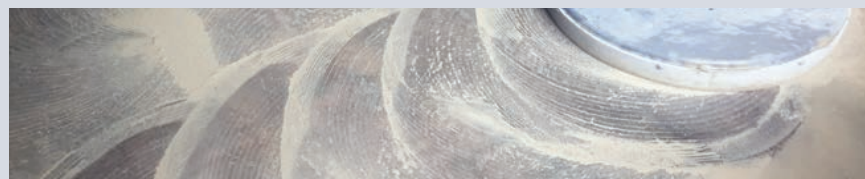



# WULF SERIES

## REMOVAL & PREPARATION TOOLING





# WULF® SERIES PCD'S

The SASE® Wulf® Series is a complete range of coatings removal and concrete floor preparation tooling. The series includes tooling that can handle thin to thick coatings above 3 mils.



### PCD Split DS

For fast, effective thin mil coatings removal.  
0 - 1 mm thin mil

HOL.200997QCS



### PCD Split SS

For fast, effective thin mil coatings removal.  
0 - 1 mm thin mil


HOL.200996QCS



### PCD Wear Bar - (A Version)

For fast, effective thin to medium mil coatings removal without damaging the concrete surface. Diamond wear bar controls depth of cut.  
0-2 mm medium mil

HOL.200510 (A)



### PCD Wear Bar - (B Version)

For fast, effective thin to medium mil coatings removal without damaging the concrete surface. Diamond wear bar controls depth of cut.  
0-2 mm medium mil

HOL.200511 (B)



### PCD Full Round w/ Arrow Wear Bar - (A)

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.200512



### PCD Full Round w/ Arrow Wear Bar - (B)

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.200513



### PCD 1/4 Round on Arrow DS - (A)

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.200993 (A)



### PCD 1/4 Round on Arrow SS - (B)

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.200994 (B)

# WULF<sup>®</sup> SERIES PCD RINGS

The SASE<sup>®</sup> Wulf Series is a complete range of coatings removal and concrete floor preparation tooling. The PCD Rings allow for fast and effective removal of thin to thick coatings.



**PCD 11" / 270mm Ring w/ Wear Bar - (A)**

For fast, effective thin to medium mil coatings removal without damaging the concrete surface. Diamond wear bar controls depth of cut. 0-2 mm medium mil

HOL.201014 (A)



**PCD 11" / 270mm Ring w/ Wear Bar - (B)**

For fast, effective thin to medium mil coatings removal without damaging the concrete surface. Diamond wear bar controls depth of cut. 0-2 mm medium mil

HOL.201015 (B)



**PCD Gold 11" / 270mm Ring - (A)**

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.201012 (A)



**PCD Gold 11" / 270mm Ring - (B)**

For fast, effective very thick mil coatings removal. Tears through elastic or rubberized membranes and compounds. >3 mm very thick mil

HOL.201013 (B)




**PCD Ring Mounting Screws  
(For extra safety)**

For use when mounting PCD 11" rings and bush hammers to floor grinder heads for extra safety.

NB.13.216

# WULF® SERIES BUSH HAMMERS

The SASE® Wulf Bush Hammer Series is the most aggressive and advanced bush hammer tool in the industry. With its sealed bearing design, no concrete dust can penetrate the assembly allowing for maximum life!

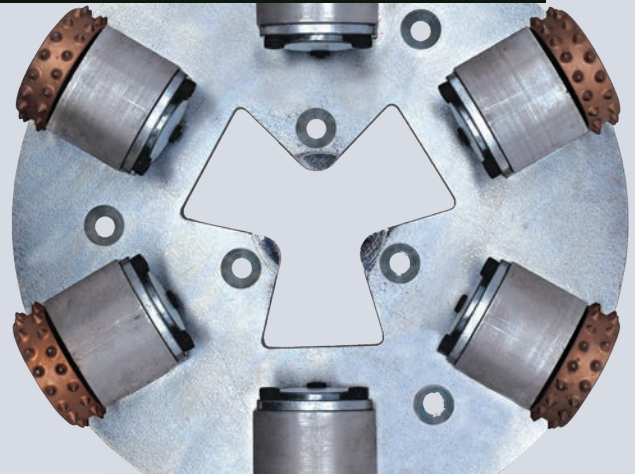

SAS.906500

### Wulf® Bush Hammer Series - 11" / 270mm Plate

11" Plate with (6) sealed bearing pin rollers with ultimate removal capacity. Fits PDG 8000 and other industry 30" - 32" floor grinders.



SAS.905500

### Wulf Bush Hammer Series - 7.5" / 200mm Plate

7" Plate with (3) sealed bearing pin rollers with ultimate removal capacity. Fits PDG 6000 & PDG 5000 floor grinders.



SAS.20015

### Wulf® Bush Hammer Series Sealed Bearing Complete with Roller

Sealed bearing complete with roller for replacement for 11" & 7" Wulf Bush Hammer Series plates.



SAS.20016


### Wulf Bush Hammer Roller

Bush hammer pin roller replacement for sealed bearing.



# WULF® CLAW REMOVAL TOOLS

Maximize removal rates without excessive damage to the floor. The new Wulf Claw from SASE® bridges the gap between PCD's and metal diamond tooling, without adding steps to the process. Removal of glues, thinsets, water proofing membranes, epoxies, floats and patches without destroying the underlying substrate.



HOL.200515

## Wulf® Iron Claw Removal Tool - Gold

Gold is for Hard to Medium Concrete. The Wulf® Claw bridges the gap between PCD's and metal diamond tooling, without adding steps to the process. Removal of glues, thinsets, water proofing membranes, epoxies, floats and patches without destroying the underlying substrate.



HOL.200516


## Wulf® Steel Claw Removal Tool - Black

Black is for Medium to Soft Concrete. The Wulf® Claw bridges the gap between PCD's and metal diamond tooling, without adding steps to the process. Removal of glues, thinsets, water proofing membranes, epoxies, floats and patches without destroying the underlying substrate.



# TUNGSTEN SCRAPER SQUARES

SASE® Tungsten Scraper tools are great for tacky adhesives and coatings that have a hard time being mechanically ground. The scraping action “shaves” the coating off the surface without damaging the substrate. The Scraper Squares can be arranged in (6) different positions for more or less down pressure and aggressiveness. They can also be positioned to be run in either direction.



**Tungsten Scraper Holder w/ Squares (Complete Unit)**

For quick and easy removal of tacky adhesives, mastics and other hard to remove coatings

HOL.904150



**Tungsten Scraper Holder**

Scraper Holder only with no squares or screw attachments

HOL.904145



**Tungsten Scraper Square**

Scraper square replacement (single unit)

HOL.SPMW643



**Tungsten Scraper Square Screw**

Scraper screw replacement (single unit)

HOL.900000



# EDGE GRINDER

TOOLING






# RESIN BOND DIAMOND PADS

SASE® Resin Bond Diamond pads work great under smaller, light weight machines and are a great alternative for concrete polishing. They also can be used on various self-leveling compounds.



## 5" Resin Diamond Pads



SC50.500240

**5" Resin Bond Diamond Pad Grey - 50 grit**


Removal of scratches left by previous metal bond steps.



SC50.500241

**5" Resin Bond Diamond Pad Black - 100 grit**

Can be used as the first step in polishing.



SC50.500242

**5" Resin Bond Diamond Pad Blue - 200 grit**

Used to remove 100 grit scratches.



SC50.500243

**5" Resin Bond Diamond Pad Red - 400 grit**

Typically used as the last step before dye and densifier are applied.



SC50.500244

**5" Resin Bond Diamond Pad White - 800 grit**

Provides high shine, often the last step in polishing of retail stores.



SC50.500245

**5" Resin Bond Diamond Pad Yellow - 1500 grit**

Provides a very high shine and can be last step before applying guard / sealer.



SC50.500246

**5" Resin Bond Diamond Pad Green - 3000 grit**

Provides the highest shine and the last step before applying guard / sealer.




SC50.900902

**5" Flexible Backer Pad - 5/8" Arbor**

Preferred use with 5" Resin Diamond Pads


## 3" Resin Diamond Pads



SC30.500240

**3" Resin Bond Diamond Pad Grey - 50 grit**


Removal of scratches left by previous metal bond steps.



SC30.500241

**3" Resin Bond Diamond Pad Black - 100 grit**


Can be used as the first step in polishing.



SC30.500242

**3" Resin Bond Diamond Pad Blue - 200 grit**


Used to remove 100 grit scratches.



SC30.500243

**3" Resin Bond Diamond Pad Red - 400 grit**


Typically used as the last step before dye and densifier are applied.



SC30.500244

**3" Resin Bond Diamond Pad White - 800 grit**


Provides high shine, often the last step in polishing of retail stores.



SC30.500245

**3" Resin Bond Diamond Pad Yellow - 1500 grit**

Provides a very high shine and can be last step before applying guard / sealer.



SC30.500246

**3" Resin Bond Diamond Pad / Green - 3000 grit**


Provides the highest shine and the last step before applying guard / sealer.

# METAL FLEX DIAMOND PADS

SASE® Metal Flex Diamond pads are ideal for removing mastics and sealers and also to profile edges without gouging the floor. The Metal Flex Diamond pads are available in three sizes: 3", 5" and 6".




## 3" Metal Flex Diamond Pads



SC30.500502

**3" Metal Flex Diamond Pad Aqua - 30 grit**


Aggressive cutting with gouging.



SC30.500503

**3" Metal Flex Diamond Pad Grey - 50 grit**

Ideal for removing sealers and as a first cut on new concrete.




SC30.500504

**3" Metal Flex Diamond Pad Black - 100 grit**

Removes scratches left by 50 grit Metal Flex Diamond Pad.


## 5" Metal Flex Diamond Pads



SC50.500502

**5" Metal Flex Diamond Pad Aqua - 30 grit**


Aggressive cutting with gouging.



SC50.500503

**5" Metal Flex Diamond Pad Aqua - 50 grit**

Ideal for removing sealers and as a first cut on new concrete.



SC50.500504

**5" Metal Flex Diamond Pad Black - 100 grit**

Ideal for removing sealers and as a first cut on new concrete.


## 6" Metal Flex Diamond Pads



SC60.500249

**6" Metal Flex Diamond Pad Yellow - 16 grit**


Very aggressive cutting with gouging. Ideally used on the SASE® Edge Pro 180.



SC60.500250

**6" Metal Flex Diamond Pad Aqua - 30 grit**

Aggressive cutting without gouging. Ideally used on the SASE® Edge Pro 180.



SC60.500251

**6" Metal Flex Diamond Pad Grey - 50 grit**

Ideal for removing sealers and as a first cut on new concrete. Ideally used on the SASE® Edge Pro 180.



SC60.500252

**6" Metal Flex Diamond Pad Black - 100 grit**

Removes scratches left by Metal Flex 50 grit pads. Ideally used on the SASE® Edge Pro 180.




SC50.900901

**5" Rigid Backer Pad - 5/8" Arbor**

Preferred use with 5" Metal Flex Diamond Pads

# SURECUT COPPER BOND PADS

SASE® SureCut Copper Bond pads provide improved longevity and elimination of swirl marks. For use with the SASE® SC50 and other industry 5” hand grinders.

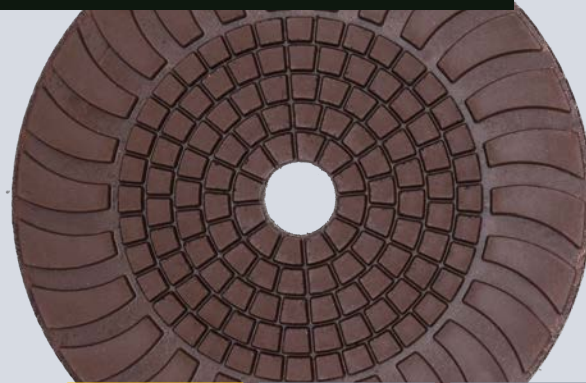

**POLISH**



**DRY USE**



**WET USE**



**PREP**



SC50.500400

## 5” SureCut Copper Bond Pad Aqua - 30 grit

Often used in place of the 50 grit metal bond for removal of thin mil coatings and sealers.



SC50.500401

## 5” SureCut Copper Bond Pad Grey - 50 grit

Often used in place of the 100 grit metal bond for removal of thin mil coatings and sealers.



SC50.500402

## 5” SureCut Copper Bond Pad Black - 100 grit

Often used to reduce scratches left from 50 grit metal bond.



# HYBRID EDGE PADS

SASE® Hybrid Edge pads can eliminate steps saving time and money. Easily transition from metals to resins either at 80 or 100 grit steps. For use with the SASE® SC50 and other industry 5” hand grinders.



## 5” Hybrid Edge Pad - 100 grit



Great for transitioning from metals to resin when doing edge grinding and polishing. Removes 50 - 80 grit metal scratches.

SC50.500600



# HONEYCOMB DIAMOND PADS


SASE® 5” Honeycomb Diamond pads are the most economical and productive way to do edge work.

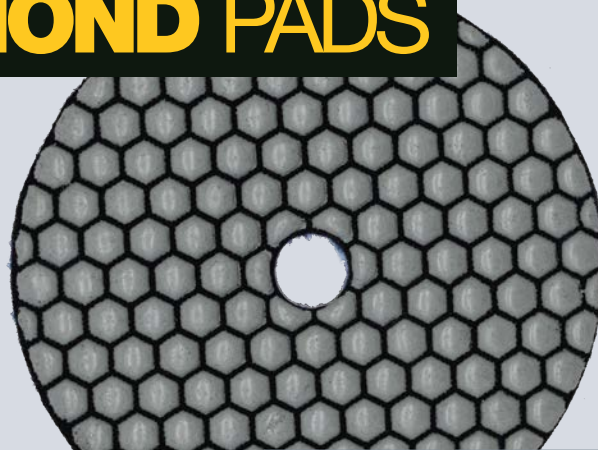

**5” Honeycomb Diamond Pad  
Lime - 30 grit**

Aggressive cut, quick and fast


SC50.500339



**5” Honeycomb Diamond Pad  
Blue - 200 grit**

Aggressive cut, quick and fast


SC50.500342



**5” Honeycomb Diamond Pad  
Grey - 50 grit**

Aggressive cut, quick and fast


SC50.500340



**5” Honeycomb Diamond Pad Red  
- 400 grit**

Aggressive cut, quick and fast


SC50.500343



**5” Honeycomb Diamond Pad  
Black - 100 grit**

Aggressive cut, quick and fast

SC50.500341



**5” Honeycomb Diamond Pad  
White - 800 grit**

Aggressive cut, quick and fast

SC50.500344

# QUIKCUT® CUP WHEELS

## QUIKCUT® CUP WHEELS

SASE® QuikCut® Cup Wheels are made with advanced technology all contained within a simple, four step grinding and polishing system with outstanding finishes. It reduces edge grinding time up to 50% compared to conventional edge grinding methods.



### 5" QuikCut® Cup Wheels



SC50.900702C

#### 5" QuikCut® Edge Wheel Coarse - 40 grit Grey

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC50.900701M

#### 5" QuikCut® Edge Wheel Medium - 80 grit Blue

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC50.900700F

#### 5" QuikCut® Edge Wheel Fine - 200 grit Yellow

Aggressive removal of thin to medium coatings.



SC50.900699E

#### 5" QuikCut® Edge Wheel Extra Fine - 400 grit Orange

Thin mil removal, polishing and blending.

### 6" QuikCut® Cup Wheels



SC60.500303C

#### 6" QuikCut® Edge Wheel Coarse - 40 grit Grey

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC60.500302M

#### 6" QuikCut® Edge Wheel Medium - 80 grit Blue

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC60.500301F

#### 6" QuikCut® Edge Wheel Fine - 200 grit Yellow

Aggressive removal of thin to medium coatings.



SC60.500300E

#### 6" QuikCut® Edge Wheel Extra Fine - 400 grit Orange

Thin mil removal, polishing and blending.

### 7" QuikCut® Cup Wheels



SC70.850802C

#### 7" QuikCut® Edge Wheel Coarse - 40 grit Grey

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC70.850801M

#### 7" QuikCut® Edge Wheel Medium - 80 grit Blue

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.



SC70.850800F

#### 7" QuikCut® Edge Wheel Fine - 200 grit Yellow

Aggressive removal of thin to medium coatings.



SC70.850799E

#### 7" QuikCut® Edge Wheel Extra Fine - 400 grit Orange

Thin mil removal, polishing and blending.



# 7" CUP WHEELS

SASE® stocks a wide variety of 7" cup wheels excellent for concrete preparation and coatings removal. SASE® 7" cup wheels are used on the SASE® SC70 and other industry 7" hand grinders.



### 7" PCD 6-Segment Wulf® Series

Removal of thick mil coatings and self levelers.

SC70.900613 (Non-Threaded)  
SC70.900607 (Threaded)



### 7" 10-Segment Arrow

Aggressive removal of thin to medium coatings.

SC70.900614 (Non-Threaded)  
SC70.900615 (Threaded)



### 7" 24-Segment Turbo

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900600 (Non-Threaded)  
SC70.900617 (Threaded)



### 7" 18-Segment, 9 Long / 9 Short

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900604 (Non-Threaded)  
SC70.900608 (Threaded)



### 7" 12-Segment Single Row

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900601 (Non-Threaded)  
SC70.900606 (Threaded)



### 7" 42-Segment Turbo - 24 grit

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900620 (Threaded)



### 7" 14-Segment T

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900605 (Non-Threaded)  
SC70.900619 (Threaded)



### 7" Diamond Cluster - Medium grit

Fast aggressive removal of paints, epoxies and glue.

SC70.900714 (Threaded)



### 7" 12-Segment Turbo

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900603 (Non-Threaded)  
SC70.900618 (Threaded)



### 7" 24-Segment Double Row

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900602 (Non-Threaded)



### 7" 42-Segment Turbo - 16 grit

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC70.900616 (Threaded)


SC70 Hand Grinder

pg. 75



# 5" CUP WHEELS

SASE® stocks a wide variety of 5" cup wheels excellent for concrete preparation and coatings removal. SASE® 5" cup wheels are used on the SASE® SC50 and other industry 5" hand grinders.

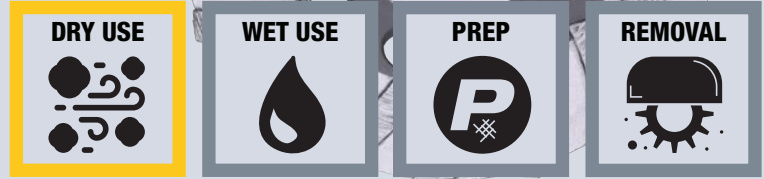

### 5" PCD Wulf® Series

Removal of thick mil coatings and self levelers.

SC50.900612 (Non-Threaded)  
SC50.900611 (Threaded)



### 5" Arrow Segment

Aggressive removal of thin to medium coatings.

SC50.900610 (Threaded)



### 5" 18 Segment

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900608 (Threaded)



### 5" Hybrid Filled Coarse

Ideal for light surface preparation or for polished concrete edge work to expose minimal aggregate, while leaving a smooth profile and blending edges.

SC50.900810 (Threaded)



### 5" Hybrid Filled Fine

Ideal for polished concrete edge work, leaving a smooth profile and blending edges.

SC50.900812 (Threaded)



### 5" T-Segment

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900609 (Threaded)



### 5" Diamond Cluster - Medium grit

Fast aggressive removal of paints, epoxies and glue.

SC50.900711 (Threaded)



### 5" S-Segment Turbo - 25 grit

For stock removal of concrete and mastics, rubbers, epoxies and other coatings.

SC50.900620 (Threaded)



### 5" Hybrid Filled Medium

Ideal for light surface preparation or for polished concrete edge work, leaving a smooth profile and blending edges.

SC50.900811 (Threaded)


SC50 Hand Grinder

pg. 75



# CORNER GRINDING POLISHING PADS


SASE® Corner Grinding & Polishing Pads are ideal for corners and tight, hard to reach areas and are designed to be used with the SASE® Corner Polisher.

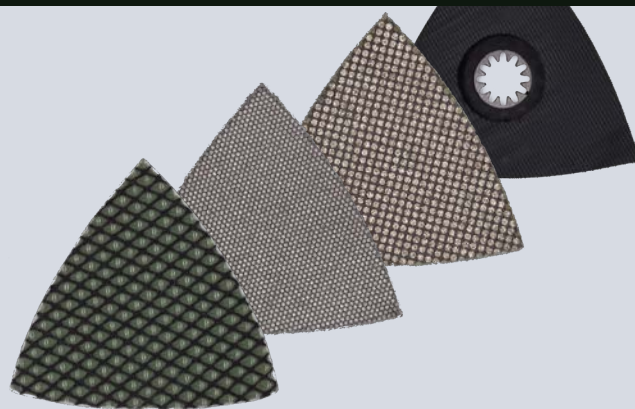

SAS.FMM0510

### Corner Polishing Backer Pad Holder


Used to hold corner grinding and polishing pads to corner polisher. Sold in 2-packs.



HOL.502901

### Corner Pad Metal Bond Green - 60 grit

Removes creams and sealers.



HOL.502902

### Corner Pad Metal Bond Black - 120 grit


Removes 60 grits metal bond scratches.



HOL.502903

### Corner Pad Metal Bond Red - 200 grit


Removes 120 grit metal bond scratches.



HOL.502904

### Corner Pad Metal Bond Yellow - 400 grit


Removes 200 grit metal bond scratches and readies corners for polishing.



HOL.502905

### Corner Pad Resin Bond White - 500 grit


Removes 400 grit metal bond scratches and polishes to a high shine.



HOL.502906

### Corner Pad Resin Bond Blue - 1000 grit

Removes 500 grit resin bond scratches and polishes to a very high shine.



HOL.502907

### Corner Pad Resin Bond Orange - 3000 grit

Removes 1000 grit resin bond scratches and polished to the highest shine.

Corner Edge Grinder

pg. 76






# FLOOR PADS



# TRIFECTA® DIAMOND PADS

Designed specifically for use under high speed burnishers and floor scrubbers. The new SASE® Trifecta® Diamond Pads are perfect for burnishing sealers on polished concrete to removing imperfections or even a full rejuvenation, the SASE® Trifecta® Diamond Pads do it all.

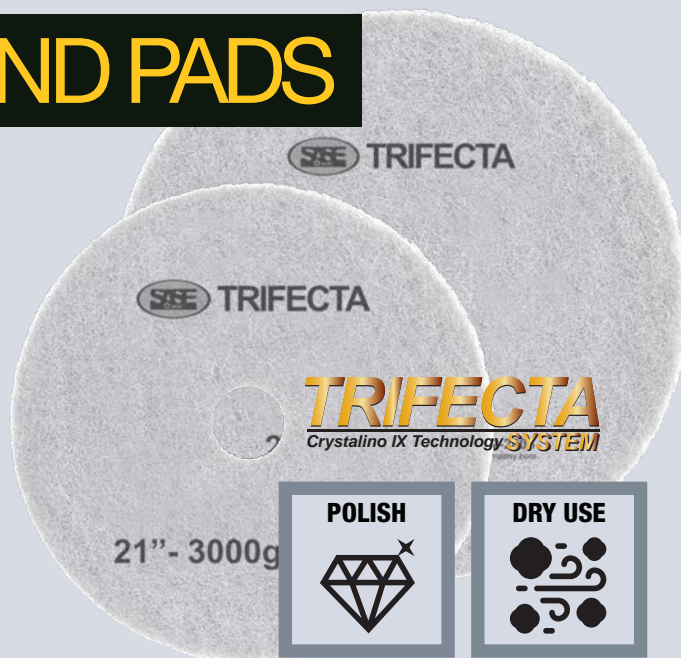

## 27" Trifecta® Diamond Pads - (2) per Pack



### SASE® 27" Trifecta® Pad - 400 grit

For use with SASE® 27" high speed burnisher for burnishing and restoration.

TRI.27.0400



### SASE® 27" Trifecta® Pad - 800 grit

For use with SASE® 27" high speed burnisher for burnishing and restoration.

TRI.27.0800



### SASE® 27" Trifecta® Pad - 1500 grit

For use with SASE® 27" high speed burnisher for burnishing and restoration.

TRI.27.1500



### SASE® 27" Trifecta® Pad - 3000 grit

For use with SASE® 27" high speed burnisher for burnishing and restoration.

TRI.27.3000

## 24" Trifecta® Diamond Pads - (2) per Pack



### SASE® 24" Trifecta® Pad - 400 grit

For use with 24" high speed burnisher for burnishing and restoration.

TRI.24.0400



### SASE® 24" Trifecta® Pad - 800 grit

For use with 24" high speed burnisher for burnishing and restoration.

TRI.24.0800



### SASE® 24" Trifecta® Pad - 1500 grit

For use with 24" high speed burnisher for burnishing and restoration.

TRI.24.1500



### SASE® 24" Trifecta® Pad - 3000 grit

For use with 24" high speed burnisher for burnishing and restoration.

TRI.24.3000

## 21" Trifecta® Diamond Pads - (2) per Pack



### SASE® 21" Trifecta® Pad - 400 grit

For use with 21" high speed burnisher for burnishing and restoration.

TRI.21.0400



### SASE® 21" Trifecta® Pad - 800 grit

For use with 21" high speed burnisher for burnishing and restoration.

TRI.21.0800



### SASE® 21" Trifecta® Pad - 1500 grit

For use with 21" high speed burnisher for burnishing and restoration.

TRI.21.1500



### SASE® 21" Trifecta® Pad - 3000 grit

For use with 21" high speed burnisher for burnishing and restoration.

TRI.21.3000




**TRIFECTA**  
Crystalino IX Technology SYSTEM

21"- 3000g



# TRIFECTA® HD DIAMOND PADS

Designed specifically for use under high speed burnishers. The SASE® Trifecta® HD Diamond Pads are perfect for burnishing wet to remove guard.



**SASE® 27" Trifecta® HD Pads - (2) Per Pack**

Use dry for the ultimate shine, use wet to remove guard. For use with SASE® 27" high speed burnisher.

TRI.27.HD

# DIAMOND FLOOR PADS

SASE® manufactures various floor pads that fit floor grinders, auto-scrubbers and high speed burnishers.



**27" SureShine Heat Pad - (5) Per Pack**

Used on floors where a matte finished is desired. For use with SASE® 27" high speed burnisher.

SSP.27HEAT



**27" Burnisher Pad - (5) Per Pack**


Used to clean floor between polishing steps and after applying SASE® guards and sealers. For use with SASE® 27" high speed burnisher.

SSP.27.005









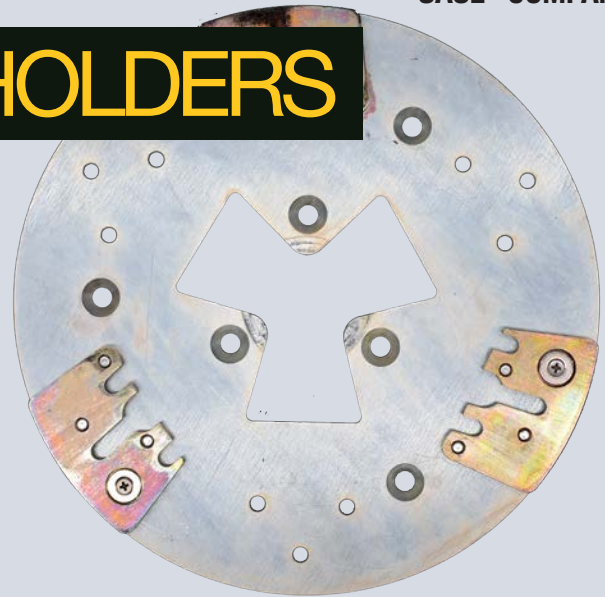


# TOOLING PLATES & HOLDERS

SASE® manufactures a variety of tooling holders and adapters allowing contractors to use SASE® tooling under various competitors' floor grinders.










## 11" / 270mm Plates







	Item #	Description	Used With
	PDG.80082.00	Rigid Steel Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete.
	PDG.80183.10	Rigid Steel Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete. QCS adapters include magnets for additional safety.
	HOL.905210	Rigid Aluminum Plate with Non-magnetic SASE® QCS Adapters	Aluminum tool holder for attaching SASE® QCS tools to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete.
	HOL.906312	Rigid Aluminum Plate with Non-magnetic SASE® QCS Adapters	Aluminum tool holder for attaching SASE® QCS tools to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete. QCS adapters include magnets for additional safety.
	HOL.905225	Flexible Plastic Plate Complete with Lippage for 3" Puck Style Tooling	Plastic tool holder for attaching 3" puck style tools to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete. Plate includes foam riser for flexibility to contour to floor.
	-HOL.200126	Top Holder Plastic with Lippage for 3" Puck Style Tooling	Plastic tool holder top replacement for HOL.905225. Includes 3" Velcro inserts.
	-HOL.905192	11" Foam Riser	Foam riser or foam riser replacement for HOL.905218.
	-HOL.905196	Aluminum Base with Velcro	Aluminum base replacement for HOL.905218. Includes small hook (Velcro).
	SAS.2000121	Xenith Complete Assembly, 11" / 270mm	Plastic tool holder for attaching SASE® 11" Xenith pad and other fiber woven pads to SASE® PDG 8000 and other industry 30 - 32" floor grinders utilizing shamrock or cross complete. Plate includes large hook (Velcro).

# TOOLING PLATES & HOLDERS

## 9" / 240 - 230mm Plates

	Item #	Description	Used With
	HOL.905214	Rigid Steel Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Diamatic 780 series floor grinders.
	HOL.907830	Rigid Steel Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Diamatic 780 style floor grinders. QCS adapters include magnets for additional safety.
	HOL.905212	Rigid Aluminum Plate with Non-magnetic SASE® QCS Adapters	Aluminum tool holder for attaching SASE® QCS tools to HTC 650 & 500 series floor grinders.
	HOL.907315	Rigid Aluminum Plate with Non-magnetic SASE® QCS Adapters	Aluminum tool holder for attaching SASE® QCS tools to HTC 650 & 500 series floor grinders. QCS adapters include magnets for additional safety.
	HOL.905220	Flexible Plastic Plate Complete with Lippage for 3" Puck Style Tooling	Plastic tool holder for attaching 3" puck style tools to Diamatic 780 style floor grinders. Plate includes foam riser for flexibility to contour to floor.
	-HOL.905191	9" Foam Riser	Foam riser or foam riser replacement for HOL.905220.
	HOL.902240	Aluminum Plate with hook Velcro	Aluminum tool holder for attaching SASE® 9" Xenith pad and other fiber woven pads to HTC 650 & 500 floor grinders utilizing shamrock or cross complete. Plate includes hook (Velcro).




## 7" / 200 - 185mm Plates

	Item #	Description	Used With
	PDG.50040.00	Rigid Steel Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to SASE® PDG 6000 & 5000 floor grinders.
	PDG.50160.20	Rigid Steel Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to SASE® PDG 6000 & 5000 floor grinders. QCS adapters include magnets for additional safety.
	HOL.905212	Rigid Steel Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Diamatic 580 & 535 series floor grinders.
	HOL.907340	Rigid Steel Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Diamatic 580 & 535 style floor grinders. QCS adapters include magnets for additional safety.
	HOL.905010	Aluminum Plate with Lippage for 3" Puck Style Tooling	Aluminum tool holder for attaching 3" puck style tools to Diamatic 580 & 535 series floor grinders.
	-HOL.905193	Foam Riser (7 3/4" / 200mm)	Foam riser or foam riser replacement for HOL.600100.








# TOOLING PLATES & HOLDERS

SASE® COMPANY

## 7" / 200 - 185mm Plates

	Item #	Description	Used With
	SAS.20005	Velcro Plate System for 7.5" Xenith Pads (7 3/4" / 200mm)	Plastic tool holder for attaching SASE® 7" Xenith pad and other fiber woven pads to SASE® PDG 6000 & 5000 floor grinders. Plate includes large hook (Velcro).
	SAS.200121	Plastic Plate with Lippage for 2" Puck Style Tooling	Plastic tool holder for attaching 2" puck style tools to SASE® PDG 6000 & 5000 floor grinders.
	HOL.600100	Plastic Plate Complete with Lippage for 3" Puck Style Tooling	Plastic tool holder for attaching 3" puck style tools to SASE® PDG 6000 & 5000 floor grinders. Plate includes foam riser for flexibility to contour to floor.








## Husqvarna / Skanmaskin / Terrcco

	Item #	Description	Used With
	SAS.238100	Rigid Steel Husqvarna Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Husqvarna 820 floor grinders.
	SAS.259000	Rigid Steel Husqvarna Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Husqvarna 820 floor grinders. QCS adapters include magnets for additional safety.
	SAS.249200	Rigid Steel Husqvarna Plate with Non-magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Husqvarna 680 & 520 floor grinders.
	SAS.268700	Rigid Steel Husqvarna Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Husqvarna 680 & 520 floor grinders. QCS adapters include magnets for additional safety.
	SAS.800955	Rigid Steel Skanmaskin Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Skanmaskin 800 floor grinders. QCS adapters include magnets for additional safety.
	SAS.800745	Rigid Steel Skanmaskin Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Skanmaskin 650i floor grinders. QCS adapters include magnets for additional safety.
	HOL.600350	Rigid Steel Terrcco Plate with Magnetic SASE® QCS Adapters	Steel tool holder for attaching SASE® QCS tools to Terrcco floor grinders. QCS adapters include magnets for additional safety.



# TOOLING PLATES & HOLDERS

## Adapters

	Item #	Description	Used With
	SAS.904175	SASE® Magnetic QCS Adapter	Mountable on any tool holders, allowing the use of SASE® QCS tooling under any floor grinder. QCS adapter includes magnet for additional safety.
	HOL.200099A	Eagle Tool Holder with Magnetic SASE® QCS Adapter SASE®	Aluminum tool holder for attaching SASE® QCS tools to Eagle floor grinders. QCS adapter includes magnet for additional safety.
	HOL.905227A	Lavina Tool Holder with Magnetic SASE® QCS Adapter	Aluminum tool holder for attaching SASE® QCS tools to Lavina floor grinders. QCS adapter includes magnet for additional safety.
	HOL.600205QCS	STI Tool Holder with Magnetic SASE® QCS Adapter	Aluminum tool holder for attaching SASE® QCS tools to STI floor grinders. QCS adapter includes magnet for additional safety.
	HOL.902120	Tear Drop Velcro Adapter with SASE® QCS screws for 2" Puck Style Tooling	Steel tool holder for attaching 2" puck style tools.
	-SAS.500117	2" Insert with Hook (Velcro)	2" insert replacement for HOL.905218. Includes small hook (Velcro).
	SAS.ADPNON	3" Aluminum Velcro Adapter with SASE® QCS screws	Aluminum tool holder for attaching 3" puck style tools to SASE® QCS adapters. Adapter does not include any lippage.
	SAS.LIPADP	3" Aluminum Lippage Velcro Adapter with SASE® QCS screws	Aluminum tool holder for attaching 3" puck style tools to SASE® QCS adapters. Adapter includes lippage.
	-SAS.10017	3" Insert with Hook (Velcro)	2" insert replacement for SAS.LIPADP. Includes small hook (Velcro).
	HOL.905197	3" Foam Riser	For use for additional flexibility with 3" puck style tooling.

# TOOLING USE CHART

The chart below should be used as a reference for tool use. In some cases tools may be used either wet or dry. However, the preferred use for the tool will be highlighted.

Tool	Polish	Prep	Wet Use	Dry Use	Removal
Metal Bond Diamond Tooling					
3" Metal Bond Puck					
QuikCut Hybrid Series					
Hybrid Series Pucks					
Hybrid C-Bond Pucks					
Triton 2" Pucks					
Triton X-Series					
Triton S-Series					
Resin Series Pucks					
PT Resin Bond					
Xenith Pads					
Xenith MR Pads					
Galaxy System Polishing Pads					
Wulf PCD					
Wulf PCD Wear Bar					
Wulf PCD Full Round Arrow					
Wulf PCD 1/4 Round Arrow					
Wulf Ring with Wear Bar					
Wulf PCD Gold Ring					
Wulf Claw					
Wulf Bush Hammer					
3" Metal Flex Pads					
3" Resin Diamond Pads					
5" Metal Flex Pads					
5" Surecut Copper Bond Pads					
5" Hybrid Edge Pads					
5" Resin Bond Diamond Pads					
5" Honeycomb Diamond Pads					
QuikCut Cup Wheels					
Trifecta Pads					
Trifecta HD Pads					
5" & 7" Metal Bond Cup Wheels					

# CONCRETE


## POLISHERS AND GRINDERS








# PDG-9500

## CONCRETE GRINDER & POLISHER

**ELECTRIC**  


**WIDTH**  
  
36" - 30"

**WEIGHT**  
  
1,265 lbs

**PRESSURE**  
  
660 - 760 lbs



## SASE® PDG 9500 PLUS

The SASE® PDG 9500 Plus is one of the most efficient and versatile floor grinders in the industry. With its convertible shroud changing from a massive 36” grinding path down to the industry standard 32” grinding path if needed. New features includes an easy to use, integrated weight system with four positions for less, more and neutral grinding pressure and front and back LED lighting.



## FEATURES

- Low profile grinding head allows grinding & polishing under toe-kicks and retail store shelving
- Convertible shroud can be modified to standard SASE 30” floor grinder
- Easy to use integrated weights allow for increased or decreased grinding pressure
- LED lighting system in front and behind machine for optimal visual of the floor even in low light
- Includes (3) standard, 11” QCS rigid plates and (3) large 17” QCS rigid plates
- Connects to SASE® Bull 1250 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation




**SASE Bull 1250 EBS**  
pg. 82


## TECHNICAL DATA


<b>Item #</b>	PDG9000.03
<b>Required Circuit</b>	3 Ø / 460 volt / 40 AMP
<b>RPM</b>	600 - 1750
<b>Motor Output</b>	20 HP (15 kW)
<b>Grinding Width</b>	36 - 32 in (914 - 813 mm)
<b>Grinding Pressure</b>	660 - 760 lbs (299 - 345 kg)
<b>Machine Weight</b>	1,265 lbs (574 kg)
<b>Dimensions (LxHxW)</b>	86” x 47” x 36” - 32” (2184 x 1194 x 914 - 813 mm)


# PDG-8000P

## CONCRETE GRINDER & POLISHER

**PROPANE**  


**WIDTH**  
  
30"

**WEIGHT**  
  
1,155 lbs

**PRESSURE**  
  
575 - 820 lbs





## SASE® PDG 8000 PROPANE

The new and improved SASE® 8000 Propane floor grinder is packed with many features. It now includes a Briggs & Stratton Vanguard 993cc motor packed with the power necessary for efficient coatings removal and preparation and integrated weights helping with increased or decreased grinding pressure dialing in the right amount when grinding and polishing concrete floors.



## FEATURES

- Perfectly balanced with newly positioned wheels for easy tilting back when changing tooling
- Reliable Briggs & Stratton Vanguard 993cc 36 HP motor
- 25 gallon water tank - largest in the industry!
- Easy to use integrated weights allow for increased or decreased grinding pressure
- Connects to larger, 33.5 lb propane tank and can accept smaller propane tanks if needed
- Includes (3) QCS rigid plates and either (3) 3" or 2" puck flex plates
- Connects to SASE® Bull 1250 EBS Propane industrial dust extractors for 99.99% dust free, OSHA approved operation




**SASE Bull 1250 EBS Propane**


## TECHNICAL DATA


<b>Item #</b>	PDG.8000.07
<b>Required Circuit</b>	Propane
<b>RPM</b>	2600 - 3400
<b>Motor Output</b>	Briggs & Stratton Vanguard 993cc
<b>Grinding Width</b>	30" (762 mm)
<b>Grinding Pressure</b>	575 - 820 lbs (261 - 372 kg)
<b>Machine Weight</b>	1,250 lbs (567 kg)
<b>Dimensions (LxHxW)</b>	55" x 56" x 32" (1397 x 1422 x 813 mm)



# PDG-8000

## CONCRETE GRINDER & POLISHER

**PROPANE**  


**WIDTH**  
  
30"

**WEIGHT**  
  
1,155 lbs

**PRESSURE**  
  
  
575 - 820 lbs



## SASE® PDG 8000

The SASE® PDG 8000 now includes integrated weights allowing for increased or decreased grinding pressure. The grinder also comes standard with a LED lighting system in front and behind machine for optimal visuals of the floor even in low light. Tried and true machine - the most sold floor grinder with over 500 units sold worldwide.



## FEATURES

- Powerful 20 HP motor - tried and true machine
- Easy to use integrated weights allow for increased or decreased grinding pressure
- LED lighting system in front and behind machine for optimal visual of the floor even in low light
- Perfectly balanced and built for low maintenance
- Includes (3) QCS rigid plates and either (3) 3" or 2" puck flex plates
- Connects to SASE Bull 1250 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation



**SASE Bull 1250 EBS**

*pg. 82*


## TECHNICAL DATA


<b>Item #</b>	PDG.8000.08
<b>Required Circuit</b>	3 Ø / 460 volt / 30 AMP
<b>RPM</b>	850 - 2000
<b>Motor Output</b>	20 HP (15 kW)
<b>Grinding Width</b>	30" (762 mm)
<b>Grinding Pressure</b>	755 - 855 lbs (342 - 388 kg)
<b>Machine Weight</b>	1,365 lbs (619 kg)
<b>Dimensions (LxHxW)</b>	86" x 47" x 32" (2184 x 1194 x 813 mm)
<b>Item #</b>	PDG.8000.01
<b>Required Circuit</b>	3 Ø / 230 volt / 40 AMP
<b>Item #</b>	PDG.8000.02 (EURO)
<b>Required Circuit</b>	3 Ø / 380 volt / 30 AMP





# 8K REMOTE

## CONCRETE GRINDER & POLISHER

**ELECTRIC**  
  
**REMOTE**

**WIDTH**  
  
**30"**

**WEIGHT**  
  
**1200 lbs**

**PRESSURE**  
  
**500 lbs**



## SASE® 8K REMOTE

The SASE® 8K Remote is one of the most efficient and versatile floor grinders in the industry. With its convertible shroud changing from a massive 36" grinding path down to the industry standard 32" grinding path if needed. New features includes an easy to use, integrated weight system with four positions for less, more and neutral grinding pressure and front and back LED lighting.



## FEATURES

- Low profile grinding head allows grinding & polishing under toe-kicks and retail store shelving
- Convertible shroud can be modified to standard SASE® 30" floor grinder
- Easy to use integrated weights allow for increased or decreased grinding pressure
- LED lighting system in front and behind machine for optimal visual of the floor even in low light
- Includes (3) standard, 11" QCS rigid plates and (3) large 17" QCS rigid plates
- Connects to SASE® Bull 1250 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation




**SASE Bull 1250 EBS**


## TECHNICAL DATA


<b>Item #</b>	PDG9000.03
<b>Required Circuit</b>	3 Ø / 460 volt / 40 AMP
<b>RPM</b>	600 - 1750
<b>Motor Output</b>	20 HP (15 kW)
<b>Grinding Width</b>	36 - 32 in (914 - 813 mm)
<b>Grinding Pressure</b>	660 - 760 lbs (299 - 345 kg)
<b>Machine Weight</b>	1,265 lbs (574 kg)
<b>Dimensions (LxHxW)</b>	86" x 47" x 36" - 32" (2184 x 1194 x 914 - 813 mm)



# 6KP

## CONCRETE GRINDER & POLISHER

**PROPANE**  


**WIDTH**  
  
25"

**WEIGHT**  
  
730 lbs

**PRESSURE**  
  
  
473 - 535 lbs





## SASE® 6KP

The SASE® 6KP is ideal for high production in residential or small commercial projects. With 535 lbs. of pressure on a 25" diameter foot print the tiny machine packs a punch and still fits through a 28" doorway. The 6KP features a newly tuned and powerful 603 Kawasaki engine along with a new heavy duty frame and integrated swing weights.



## FEATURES


- Powerful 18 HP motor
- Easy to use integrated weights allow for increased or decreased grinding pressure
- Compact yet powerful
- Perfectly balanced and built for low maintenance

## TECHNICAL DATA

<b>Item #</b>	PDG.6000.04
<b>Required Circuit</b>	Propane
<b>RPM</b>	2600 - 3400
<b>Motor Output</b>	18 HP Kawasaki Propane
<b>Grinding Width</b>	25" (635 mm)
<b>Grinding Pressure</b>	473 - 535 lbs (215 - 243 kg)
<b>Machine Weight</b>	730 lbs (331 kg)
<b>Dimensions</b> (LxHxW)	71" x 44" x 26" (1803 x 1118 x 660 mm)

# PDG-6000

## CONCRETE GRINDER & POLISHER

**ELECTRIC**  


**WIDTH**  
  
25"

**WEIGHT**  
  
546 lbs

**PRESSURE**  
  
330 lbs



## SASE® PDG 6000

The SASE® PDG 6000 is a highly versatile 25" floor grinder that is small enough to maneuver in more confined spaces, yet powerful enough to provide superior performance when floor grinding and polishing and floor preparation. It comes standard with two removable weights and allows for two, additional weights (total of four) if required.



## FEATURES

- Ideal for projects that have more tight, confined spaces
- Great for floor preparation, coatings removal and concrete grinding & polishing
- Easy to maneuver when loading and unloading on job sites
- Comes standard with two, 33 lbs removal weights and allows for two additional weight (four total) if required
- Includes (3) QCS rigid plates and either (3) 3" or 2" puck flex plates
- Connects to SASE® Bull 300 EBS or 1250 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation



**SASE Bull 300 EBS**  
pg. 84



## TECHNICAL DATA

<b>Item #</b>	PDG.6000.03
<b>Required Circuit</b>	3 Ø / 460 volt / 30 AMP
<b>RPM</b>	600 - 1750
<b>Motor Output</b>	10 HP (7.5 kW)
<b>Grinding Width</b>	25" (635 mm)
<b>Grinding Pressure</b>	330 lbs (150 kg)
<b>Machine Weight</b>	546 lbs (248 kg)
<b>Dimensions (LxHxW)</b>	53" x 44" x 26" (1346 x 1118 x 660 mm)
<b>Item #</b>	PDG.6000.01
<b>Required Circuit</b>	3 Ø / 230 volt / 40 AMP
<b>Item #</b>	PDG.600001.50
<b>Required Circuit</b>	1 Ø / 230 volt / 30 AMP



# PDG-5000P

## CONCRETE GRINDER & POLISHER

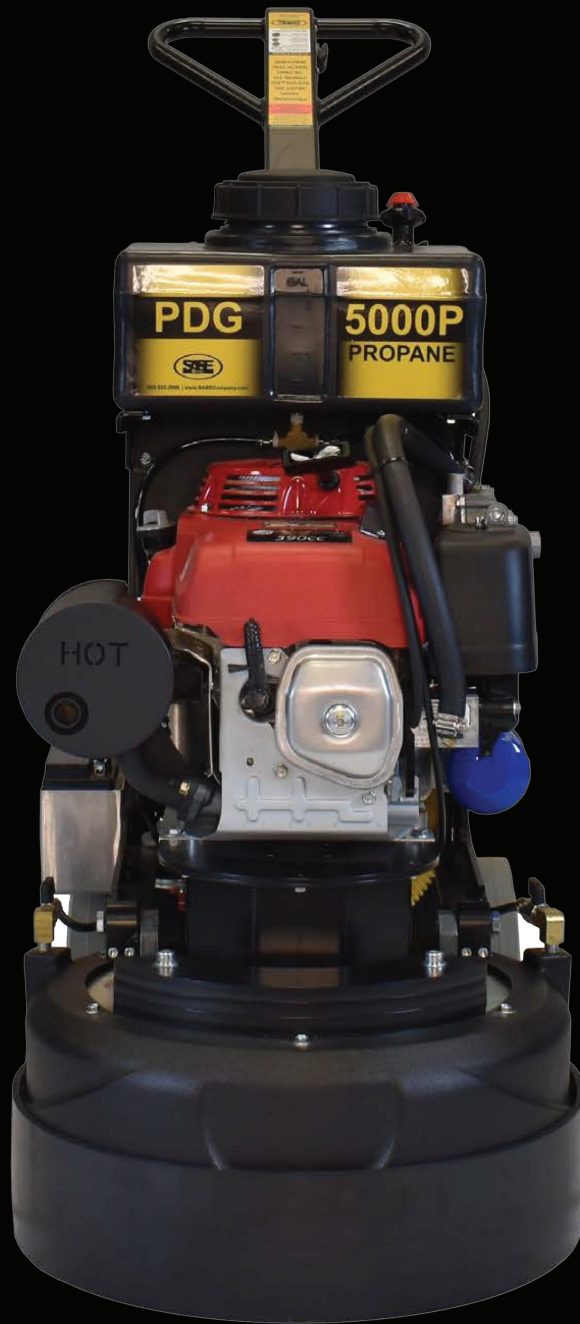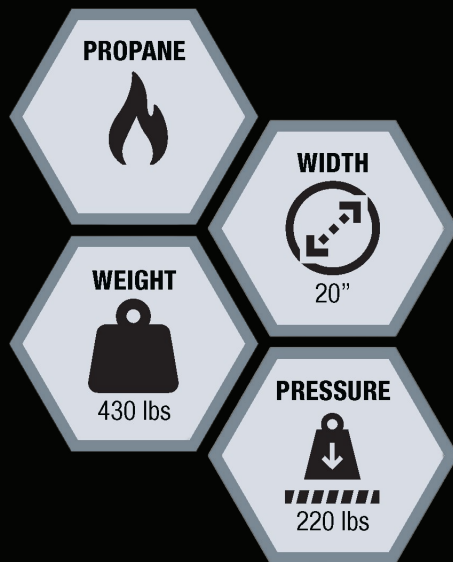

## SASE® PDG 5000 PROPANE

The SASE® PDG 5000 Propane floor grinder is great for small to medium range projects. It is small enough to get into those tight spaces but heavy enough to product a great polish and removal tough coatings. It comes stock with a Gx 390 Honda engine making it a small machine packing a big punch!



## FEATURES

- Comes stock with a Gx 390 Honda engine making it a small machine packing a big punch
- Mounted gallon water tank for optional wet grinding
- Easy to use to use controls and start-up
- Perfect for small to medium range coatings removal, grinding and polishing projects
- Includes (3) QCS rigid plates and either (3) 3" or 2" puck flex plates
- Connects to SASE® Bull 300 EBS or 240 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation

## TECHNICAL DATA

<b>Item #</b>	PDG.5000.04
<b>Required Circuit</b>	Propane
<b>RPM</b>	850 - 1700
<b>Motor Output</b>	Gx 390 Honda Engine
<b>Grinding Width</b>	20" (508 mm)
<b>Grinding Pressure</b>	220 lbs (100 kg)
<b>Machine Weight</b>	430 lbs (195 kg)
<b>Dimensions (LxHxW)</b>	54" x 34" x 21" (1372 x 864 x 533 mm)




**SASE Bull 300 EBS**

*pg. 84*

# PDG-5000

## CONCRETE GRINDER & POLISHER

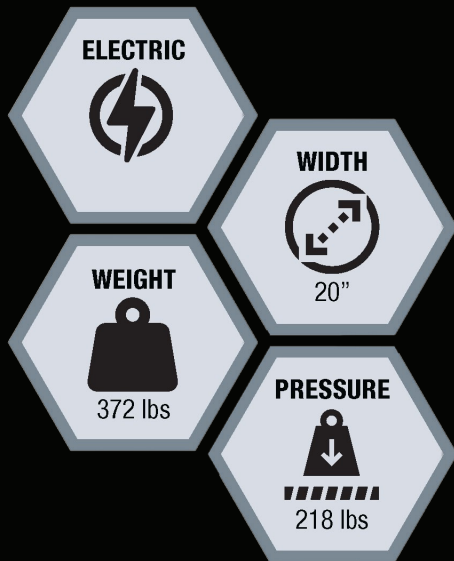



## SASE® PDG 5000

The SASE® PDG 5000 floor grinder is great for small to medium range projects. It is small enough to get into those tight spaces but heavy enough to produce a great polish and removal tough coatings. It is the perfect machine for contractors getting into the polishing or coatings industry!



## FEATURES

- Mounted water tank for optional wet grinding
- Easy to use to use controls and start-up
- Perfect for small to medium range coatings removal, grinding and polishing projects
- Includes (3) QCS rigid plates and either (3) 3" or 2" puck flex plates
- Connects to SASE® Bull 300 EBS or 240 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation




**SASE Bull 300 EBS**  
pg. 84

## TECHNICAL DATA

<b>Item #</b>	PDG.5000.01
<b>Required Circuit</b>	1 Ø / 230 volt / 30 AMP
<b>RPM</b>	850 - 2000
<b>Motor Output</b>	5 HP (3.7 kW)
<b>Grinding Width</b>	20" (508 mm)
<b>Grinding Pressure</b>	218 lbs (99 kg)
<b>Machine Weight</b>	372 lbs (169 kg)
<b>Dimensions (LxHxW)</b>	54" x 34" x 21" (1372 x 864 x 533 mm)

# PDG-3000

## CONCRETE GRINDER & POLISHER

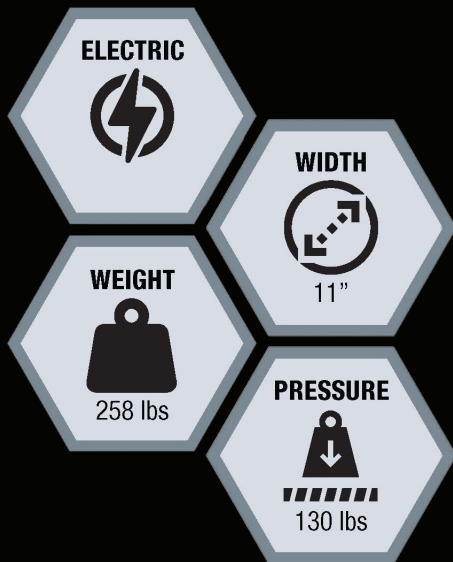

## SASE® PDG 3000

The SASE® PDG 3000 Edge Grinder is the industry's first, true, active planetary edge grinder with 3-way adjustable head. It can be adjusted left or right while walking straight, front to back to level and pitched left to right for curled edges. The head also has a low profile designed to operate under shelving and “toe kicks”.



## FEATURES

- Easier edge grinding process with the world's first True, Active Planetary edge grinder
- Low profile head design to operate under shelving and “toe kicks”
- Variable speed to dial in the exact speed needed when grinding, honing and polishing
- 3-way adjustable head for the perfect grinding position
- Adjustable pivot-lever to adjust toward wall while walking straight
- Adjustable pitch-knob to level head forward or back
- Adjustable tilt-axle to match slope of floor
- Includes (3) 128mm vulcanized velcro plates
- Connects to SASE® Bull 300 EBS or 240 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation



**SASE Bull 300 EBS**


pg. 84


## TECHNICAL DATA


<b>Item #</b>	PDG.3000.06
<b>Required Circuit</b>	3 Ø / 460 volt / 30 AMP
<b>RPM</b>	850 - 2000
<b>Motor Output</b>	3 HP (2.2 kW)
<b>Grinding Width</b>	11" (279 mm)
<b>Grinding Pressure</b>	130 lbs (59 kg)
<b>Machine Weight</b>	258 lbs (117 kg)
<b>Dimensions (LxHxW)</b>	36" x 38" x 17" (914 x 965 x 432 mm)
<b>Item #</b>	PDG.3000.05
<b>Required Circuit</b>	3 Ø / 230 volt / 40 AMP



# 27" BURNISHER

**PROPANE**  


**WIDTH**  
  
27"

**WEIGHT**  
  
355 lbs

**SPEED**  
  
1800 RPM



# SASE® 27" HIGH SPEED BURNISHER

The SASE® 27" high speed burnisher is a low profile, solid steel construction burnisher. It is great for cleaning floors, burning in guard / sealers and even removing them if needed. The 27" high speed burnisher comes in a standard version and a version that includes a mounted water tank for wet applications.



## FEATURES

- Ultra low profile at only 3.75" head height allowing it to be used under shelving and toe kicks
- Solid steel frame
- Weight kit includes (2) 13 lbs weight for additional head pressure and heat generation
- Minimal dust without a vacuum (wet version)
- On board dust control (dry version)
- Emissions monitor shut down engine if CO levels rise to high
- Connects to SASE® Bull 240 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation




**SASE Bull 240 EBS**  
pg. 86

## TECHNICAL DATA

<b>Item #</b>	SASWET.27BURNISHER
<b>Required Circuit</b>	Propane
<b>RPM</b>	1800
<b>Motor Output</b>	18 HP (13 kW)
<b>Grinding Width</b>	27" (178 mm)
<b>Grinding Pressure</b>	90 lbs (41 kg)
<b>Machine Weight</b>	355 lbs (161 kg)
<b>Dimensions (LxHxW)</b>	36" x 30" x 50" (914 x 762 x 1270 mm)
<b>Additional</b>	Wet - Includes Water Tank
<b>Item #</b>	SAS.27BURNISHER
<b>Additional</b>	Dry - No Water Tank

# SPYDER

The SASE® Spyder is an affordable edge solution for smaller surface preparation projects. Simplifies working with edges, saving time and labor costs. It is designed to operate while standing, avoiding wear knees and back.

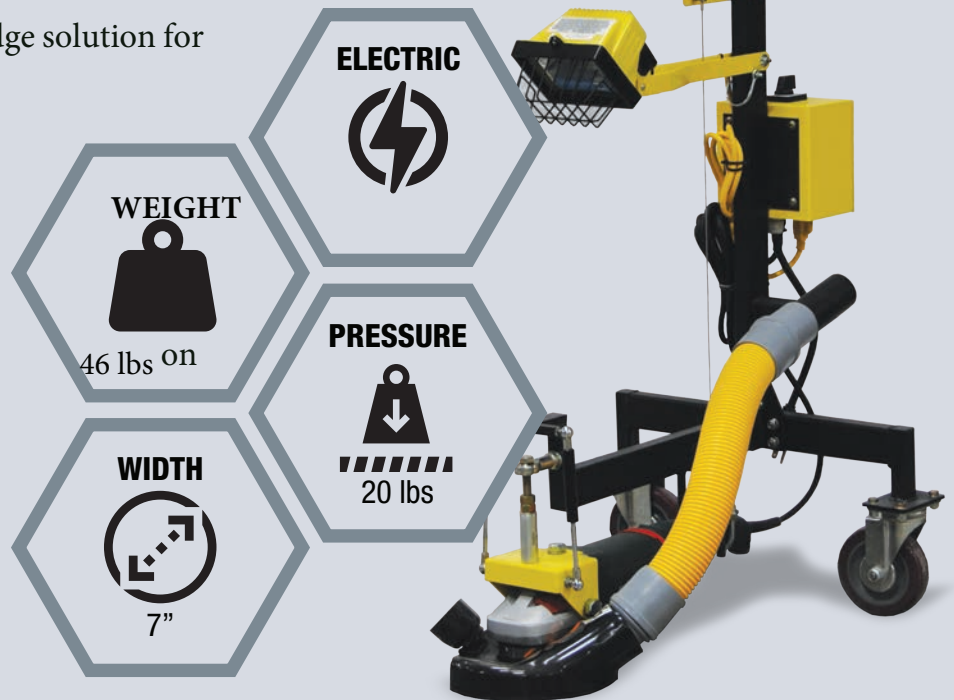

## FEATURES

- Ideal for surface preparation on edges and confined spaces
- Aggressive, upright floor prep floor grinder
- Guide handle allows control and pressure application to the enter of the grinder
- Front halogen headlight allowing for operation in low light
- Exclusive floating mechanism for maneuverability over uneven surfaces
- Includes choice of any SASE® 7” cup wheel
- Connects to SASE® Bull 240 EBS industrial dust extractors for 99.99% dust free, OSHA approved operation

## TECHNICAL DATA

<b>Item #</b>	SC7000SPY
<b>Required Circuit</b>	110 volt / 15 AMP
<b>RPM</b>	8500
<b>Motor Output</b>	1 HP (1 kW)
<b>Grinding Width</b>	7” (178 mm)
<b>Grinding Pressure</b>	20 lbs (9 kg)
<b>Machine Weight</b>	46 lbs (21 kg)
<b>Dimensions (LxHxW)</b>	28” x 38” x 22” (711 x 965 x 559 mm)



**SASE Bull 240 EBS**  
pg. 86



# SC70



The SASE® SC70 is a 7 inch hand-held dustless grinder. With it's looped handle and hinged convertible shroud this hand grinder is ideal for edge work.

## SASE® 7" Convertible Dust Shroud



For use with SASE® SC70 and other industry 7" hand grinders.

Item # - SC70.900918

# SC50



The SASE® SC50 is a 5 inch hand-held dustless grinder. Ideal for edge work and like the SC70 it also features a looped handle and hinged convertible shroud.

## SASE® 5" Convertible Dust Shroud



For use with SASE® SC50 and other industry 5" hand grinders.

Item # - SC50.900900

## TECHNICAL DATA

Item #	SC70.900000
Required Circuit	110 Volt / 15 amp
Disc Size	7 in (178 mm)
Total Length	22 in (559 mm)
RPM	8500

## TECHNICAL DATA

Item #	SC51.800104
Required Circuit	110 Volt / 15 amp
Disc Size	5 in (127 mm)
Total Length	18.5 in (470 mm)
RPM	600 - 3000



# CORNER POLISHER



This smooth, quiet operating corner polisher is ideal for finishing around, corners, doorways and stairways. Features a variable speed triangular sanding pad that oscillates between 10,000 - 19,500 RPM.

Includes a carrying case

# RAPID STRIP DISC



Coarse wheel used to sand structural polyurethane off of polished concrete. For use with SASE® SC50 and other industry 5” hand grinders.

## TECHNICAL DATA

Item #	SAS.FMM250
Required Circuit	110 Volt / 15 amp
Disc Size	3 in (76 mm)
Total Length	12 in (305 mm)
RPM	10,000 - 19,500

## TECHNICAL DATA

Item #	SAS.04015
--------	-----------

# STANDARD DUST SKIRTS

SASE® stocks a variety of standard dust skirts for SASE® floor grinders as well as other floor grinder manufacturers.

Item #	Description	Description
PDG.80077.00	30" Standard, Rubber Dust Skirt	For use with SASE® PDG 8000 series floor grinders
PDG.60062.00	25" Standard, Rubber Dust Skirt	For use with SASE® PDG 6000 series floor grinders
PDG.50082.00	20" Standard, Rubber Dust Skirt	For use with SASE® PDG 5000 series floor grinders
HOL.U118941	30" Standard, Rubber Dust Skirt	For use with Diamatic 780 series floor grinders
HOL.780125	Dustcap Brush	For use with Diamatic 780 series floor grinders
HOL.U11925	25" Standard, Velcro, Rubber Dust Skirt	For use with Diamatic 535 series floor grinders
HG.10408	36" Standard, Velcro, Rubber Dust Skirt	For use with HTC 950 RX floor grinder
HG.10405	32" Standard, Velcro, Rubber Dust Skirt	For use with HTC 800 / G320 series floor grinders
HG.10407	25" Standard Velcro, Rubber Dust Skirt	For use with HTC 650 / G240 series floor grinders
HG.10406	20" Standard, Velcro, Rubber Dust Skirt	For use with HTC 500 series floor grinders

# NON-MARKING DUST SKIRTS

SASE® Non-Marking Dust Skirts are made from a white rubber that will not leave marks when grinding and polishing.

Item #	Description	Description
PDG.8006700.NM	30" Non-marking, Rubber Dust Skirt	For use with SASE® PDG 8000 series floor grinders
HG.10405NM	32" Standard, Velcro, Rubber Dust Skirt	For use with HTC 800 series floor grinders

# BUSH HAMMER DUST SKIRTS

SASE® Bush Hammer Dust Skirts are taller to account for the difference in height when using bush hammer tooling. These dust skirts ensure a good seal to the concrete floor for maximum dust extraction efficiency.

Item #	Description	Description
PDG.80286.00	36" Bush Hammer Height, Rubber Dust Skirt	For use with SASE® PDG 9500 floor grinder
PDG.90080.07	30" Bush Hammer Height, Rubber Dust Skirt	For use with SASE® PDG 8000 series floor grinders
PDG.60062.07	25" Bush Hammer Height, Rubber Dust Skirt	For use with SASE® PDG 6000 series floor grinders
PDG.50082.07	20" Bush Hammer Height, Rubber Dust Skirt	For use with SASE® PDG 5000 series floor grinders



# SASE® HYDRATROWEL POLISHING SYSTEM



A complete range of diamond tooling, formulated specifically for use with a ride-on power trowel along with tool holder pans that utilize the SASE® cross complete for quick and easy tool changes without the need to remove the power trowel pans. More information can be online at: [SASECompany.com](http://SASECompany.com).




# DUST EXTRACTORS


## INDUSTRIAL VACUUMS




# BULL 1250

## PROPANE INDUSTRIAL VACUUM

**PROPANE**  


**CFM**  
  
388

**WEIGHT**  
  
696 lbs





## SASE® BULL 1250 EBS PROPANE

The SASE® Bull 1250 EBS Propane is a propane powered industrial dust extractor that allowing operation without the hassle of power cords. Like all SASE® Bull dust extractors, it is constructed of heavy gauge steel, making it the most durable industrial dust extractor in the industry. The Bull 1250 EBS Propane is powerful enough to handle the work load of any industry floor grinder!



## FEATURES

- OSHA approved, propane industrial dust extractor
- Contains over 62 sq-ft of filter area including a secondary HEPA filtration
- Utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes
- Extremely reliable manual purge system that is simple and easy to use
- Very durable construction using heavy gauge steel
- Low emissions EPA & CARB
- 3-way catalytic muffler lowers CO, HC and NOx emissions
- For use on job sites where electrical power is not available or where power cords are not permitted
- Powerful enough to handle the work load of any industry floor grinder

## TECHNICAL DATA

<b>Item #</b>	VAC.BULL1250.PRO.EBS
<b>Required Circuit</b>	Propane
<b>Air Flow</b>	388 cfm
<b>Lift</b>	132 in (3352 mm)
<b>Machine Weight</b>	696 lbs (316 kg)
<b>Dimensions (LxHxW)</b>	62" x 71" x 30" (1575 x 1803 x 762 mm)

# BULL 1250

EBS INDUSTRIAL VACUUM



## SASE® BULL 1250 EBS

The SASE® Bull 1250 EBS is a electric powered industrial dust extractor that available in 460 & 230 volt. Like all SASE® Bull dust extractors, it is constructed of heavy gauge steel, making it the most durable industrial dust extractor in the industry. The Bull 1250 EBS is powerful enough to handle the work load of any industry floor grinder!



## FEATURES

- OSHA approved, industrial dust extractor
- Contains over 62 sq-ft of filter area including a secondary HEPA filtration
- Utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes
- Very quiet operation at only 78 dB
- Extremely reliable manual purge system that is simple and easy to use
- Very durable construction using heavy gauge steel
- Powerful enough to handle the work load of any industry floor grinder

## TECHNICAL DATA

<b>Item #</b>	VAC.BULL1250.460V
<b>Required Circuit</b>	3 Ø / 460 Volt / 30 amp
<b>Motor Output</b>	8.5 HP (6.3 kW)
<b>Air Flow</b>	388 cfm
<b>Lift</b>	132 in (3352 mm)
<b>Machine Weight</b>	500 lbs (227 kg)
<b>Dimensions (LxHxW)</b>	49" x 70" x 27" (1245 x 1778 x 656 mm)
<b>Item #</b>	VAC.BULL1250.230V
<b>Additional</b>	3 Ø / 230 Volt / 40 amp
<b>Item #</b>	VAC.BULL1250.380V
<b>Additional</b>	3 Ø / 380 Volt / 30 amp



# BULL 300

EBS INDUSTRIAL VACUUM

**ELECTRIC**  


**WEIGHT**  
  
334 lbs

**CFM**  
  
320



## SASE® BULL 300 EBS

The SASE® Bull 300 EBS Industrial Dust Extractor is the most powerful 110 volt dust extractor in the industry. It is versatile in that it can be outfitted for 3" or 2" hose to connect to almost any grinder. It also features a heavy gauge steel construction and utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes.



## FEATURES

- OSHA approved, industrial dust extractor
- Most powerful 110 volt dust extractor in the industry
- Contains (12) stock filters including a secondary HEPA filtration
- Utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes
- Extremely reliable manual purge system that is simple and easy to use
- Very durable construction using heavy gauge steel
- Powerful enough to handle the work load of any industry floor grinder

## TECHNICAL DATA

<b>Item #</b>	VAC.BULL300.EBS.02 (2" Hose)
<b>Required Circuit</b>	110 volt / 20 amp
<b>Motor Output</b>	2.4 HP (1.8 kW)
<b>Air Flow</b>	320 cfm
<b>Lift</b>	70 in (1778 mm)
<b>Machine Weight</b>	334 lbs (152 kg)
<b>Dimensions (LxHxW)</b>	38" x 67" x 25" (965 x 1701 x 635 mm)
<b>Item #</b>	VAC.BULL300.EBS.03 (3" Hose)

# BULL 240

EBS INDUSTRIAL VACUUM





## SASE® BULL 240 EBS

The SASE® Bull 240 EBS Industrial Dust Extractor is a powerful 110 volt dust extractor specifically manufactured for easy transportation. This OSHA approved dust extractor also utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes.



## FEATURES


- OSHA approved, industrial dust extractor
- Most powerful 110 volt dust extractor in the industry
- Includes (1) cartridge filter and (2) HEPA filters
- Utilizes the SASE® Elongated Bagging System (EBS) with 60' of continuous dust bag for dustless, environmentally friendly bag changes
- Extremely reliable manual purge system that is simple and easy to use
- Powerful enough to handle the work load of any industry floor grinder

## TECHNICAL DATA

<b>Item #</b>	VAC.BULL240.EBS
<b>Required Circuit</b>	110 volt / 20 amp
<b>Motor Output</b>	1.3 HP (1 kW)
<b>Air Flow</b>	224 cfm
<b>Lift</b>	86 in (2184 mm)
<b>Machine Weight</b>	181 lbs (82 kg)
<b>Dimensions (LxHxW)</b>	31" x 48" x 23" (787 x 1219 x 584 mm)

# BULL 160

## SLURRY INDUSTRIAL VACUUM

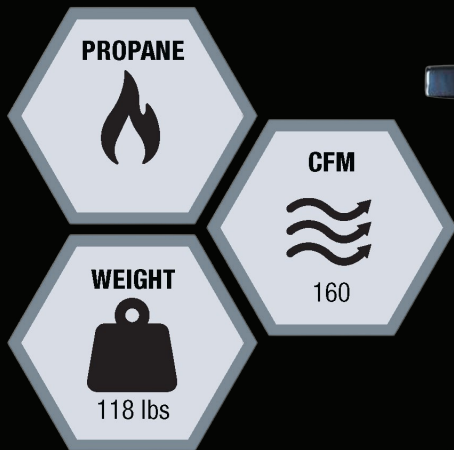

## SASE® BULL 160 SVP

The SASE® Bull 160 SVP is the industry first and only propane wet vacuum made from the ground up, specifically for slurry removal and management. It features a massive 35 gallon tank and 32” squeegee blade making cleaning up slurry simple and easy. It also has an on-board, high-pressure discharge system for emptying slurry from the Bull 160 SVP tank into a slurry bag or other chosen disposal method.



## FEATURES

- The first and only propane slurry vacuum in the industry
- Propane powered, no cord keeping operator tethered
- Massive 35 gallon tank keeping operator working longer
- 32” squeegee for ultra wide cleaning path
- Easy maintenance with no internal moving parts
- High-flow discharge system for emptying slurry into slurry bins
- Hinged top lid allows quick and full access for hardened slurry clean-out if left uncleaned for long periods of time
- Highly efficient on-board generator keeps unit running a full work day on one propane tank

## TECHNICAL DATA

<b>Item #</b>	BULL.160.SVP
<b>Required Circuit</b>	Propane
<b>Air Flow</b>	160 cfm
<b>Lift</b>	95 in (2413 mm)
<b>Machine Weight</b>	118 lbs (54 kg)
<b>Dimensions (LxHxW)</b>	31” x 48” x 23” (787 x 1219 x 584 mm)



# BULL PRE-SEPERATOR

## INDUSTRIAL VACUUM



## SASE® BULL PRE-SEPARATOR

The SASE® Bull Pre-Separator adds an additional stage of filtrations, effectively capturing up to 80% of dust and debris before making contact with the dust extractor. This dramatically increases the dust extractor filter life and lowers the maintenance and frequency of emptying the dust extractor.



## FEATURES


- Connects to SASE® Bull 1250 EBS industrial dust extractor for 99.99% dust free, OSHA approved operation
- Adds an additional stage of filtration effectively capturing up to 80% of dust and debris
- Dramatically increases the dust extractor filter life
- Low hose connections keeps unit for tipping over like most competitors pre-separators
- Lower overall maintenance on dust extractor extending life of equipment
- Reduced frequency of emptying dust extractor
- No mechanical parts or required circuit

## TECHNICAL DATA

<b>Item #</b>	NWA.10100
<b>Required Circuit</b>	N/A
<b>Machine Weight</b>	159 lbs (72 kg)
<b>Dimensions</b> (LxHxW)	43" x 68" x 29" (1092 x 1727 x 737 mm)

# VACUUM WAND PARTS & ACCESSORIES


SASE® stocks dust extractor wand spare parts and accessories for better dust containment on job sites.

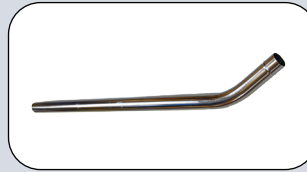

**2" Floor Wand Pole**

2" floor wand pole only, with single bend

**VAC.NZ2.WAND**

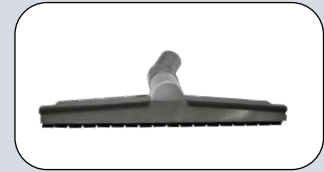

**2" Floor Nozzle Complete**

Floor nozzle only, connects with 2" Floor Wand Pole

**VAC.NZ2.TOOL**



**20" Rubber Squeegee Blade Strip Set**

Rubber squeegee blade strip replacement for 2" Floor Nozzle

**VAC.319183**



**20" Brush Strip Set**

Brush strip replacement for 2" Floor Nozzle

**VAC.319186**



**2" Wales Tale**

2" attachment for dust containment when working with products that produce a lot of dust (i.e. dumping dusty products in a 5 gallon pail)

**SAS.WALETALE**



**Splitter - 3" x 3" x 3"**

Splitter used to run two 3" dust extractor hoses from a dust extractor with a 3" dust port

**VAC.YAD.3X3X3**



**Splitter - 3" x 2" x 2"**

Splitter used to run two 2" dust extractor hoses from a dust extractor with a 3" dust port

**VAC.YAD.3X2X2**



# HOSE CUFFS & CAMLOCKS

SASE® manufactures a variety of cuffs and camlocks for any configuration your crew needs.



**Cuff - 3" Hose to 3" Tool**

Cuff used to attach 3" dust extractor hose to a 3" dust extractor tool (i.e. 3" floor wand pole)

**VAC.CF3.00000**



**Cuff - 2" Hose to 2" Hose**

Cuff used to attach 2" dust extractor hose to a 2" dust extractor tool (i.e. 2" floor wand pole)

**VAC.CF2.00000**



**Cuff - 2" Hose to 2" Tool**

Cuff used to connect 2" dust extractor hose to additional 2" dust extractor hose

**VAC.CF2.0HOSE**



**Cuff - 2" Hose to 1.5" Tool**

Cuff used to attach 2" dust extractor hose to a 1.5" dust extractor tool

**VAC.CF2.0TOOL**



**Camlock Aluminum - 3" Female to 3" Hose Shank**

Female Aluminum Camlock used to attach 3" dust extractor hose (shank) to a 3" male camlock

**VAC.10117**



**Camlock Plastic - 3" Female to 3" Hose Shank**

Female Plastic Camlock used to attach 3" dust extractor hose (shank) to a 3" male camlock


**VAC.10113**



**Camlock Aluminum - 3" Male to 3" Male**

Male Aluminum Camlock used to attach 3" outer thread to a 3" female camlock

**VAC.10123**

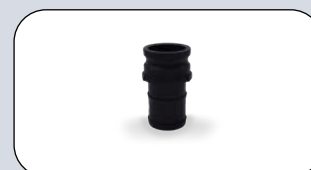

**Camlock Plastic - 3" Male to 3" Hose Shank**

Male Plastic Camlock used to attach 3" dust extractor hose (shank) to a 3" female camlock

**VAC.10111**

## DUST EXTRACTORS



**Coupler Aluminum - 3" Male Threaded**

Male Aluminum Camlock used to attach 3" inner thread to a 3" female camlock

**VAC.10214**



**Coupler Plastic - 3" Male Threaded**

Male Plastic Camlock used to attach 3" outer thread to a 3" female camlock

**VAC.10112**



**Coupler Plastic - 3" Male Non-Threaded**

Male Aluminum Camlock used to attach 3" pipe to a 3" female camlock

**VAC.101150.1**



**Camlock Aluminum - 3" Female to 2" Hose Shank**

Female Aluminum Camlock used to attach 2" dust extractor hose to a 3" male camlock

**VAC.10125**



**Camlock Aluminum - 3" Male to 2" Hose Shank**

Male Aluminum Camlock used to attach 2" dust extractor hose (shank) to a 3" male camlock

**VAC.10214**



**Dust Cap Plastic - 3" Male**

Male Plastic Dust Cap


**VAC.10115**



**Dust Cap Camlock Plastic - 3" Female**

Female Plastic Dust Cap

**VAC.10114**

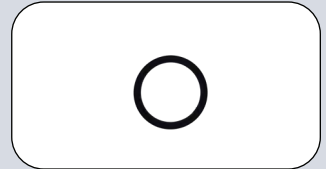

**Rubber Gasket for Female Coupler - 3"**

3" Rubber Gasket

**VAC.10116**

## VACUUM DUST BAGS

SASE® stocks single dust bags that fit old style (dust bin) dust extractors and EBS (Elongated Bagging System) replacements.



**Elongated Dust Bags (4 units per box)**

60' of continuous dust bag for use with SASE® Bull 1250, 300 and 240 EBS style dust extractors

**SAS.0009510**

**Single Dust Bags (4 mil)**

Single dust bags for use with SASE® Bull 1250 & 300 dust bin style dust extractors

**VAC.4436BAG**

**Fleece Filter (5 units per box)**

For use with Bull 150 dust extractor

**SAS.KRC.107**



# SHAVERS & SCARIFIERS



 SHAVERS

 SCARIFIERS



# SC320

## SCARIFIER/SHAVER



## SASE® SC320 SCARIFIER / SHAVER

The industry's largest and most aggressive concrete floor scarifier, shaver and planner all in one, heavy duty machine. With its 12" cutting width and up to 1" cutting depth, this machine produces the maximum amount of concrete removal capacity compared to any other machine.



## FEATURES


- Cutting width up to 12" using 64 cutting blades
- Cutting depth up to 1" depth
- Self-propelled with speed dial and vibration dampened features to ensure reduced operator fatigue
- Easy change polarity feature on machine control panel
- Lockable front caster wheel for ease of movement around job sites
- Floating side debris guards for reduce dust exposure
- Comes standard with automatic belt tensioner
- Connects to one or multiple SASE® Bull 1250 EBS industrial dust extractor for 99.99% dust free, OSHA approved operation

## TECHNICAL DATA

<b>Item #</b>	SC.12.300
<b>Required Circuit</b>	3 Ø / 460 volt
<b>Motor Output</b>	25 HP / 17.5 kw
<b>Cutting Width</b>	12 in (305 mm) max.
<b>Cutting Depth</b>	1" (25mm) max.
<b>Machine Weight</b>	779 lbs (353 kg)
<b>Dimensions</b> (LxHxW)	45" x 116" x 26" (1143 x 2947 x 660 mm)

# SC12E

## SCARIFIER

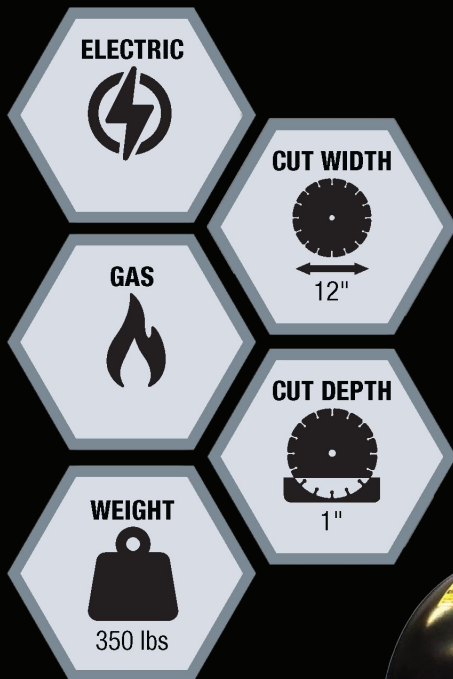



## SASE® SC12E SCARIFIER

The SASE® SC12E Scarifier is the industry most durable and productive scarifier in the industry. It has various power options including a gas powered version allowing for untethered operation.



## FEATURES


- The industry's most durable and productive scarifier
- Side access drum assembly for quick and easy cutter changes
- Heavy-duty hex shaft
- Sealed bearings and no exposed moving parts
- Equipped with an emergency stop safety cord
- Connects to SASE® Bull 300 EBS industrial dust extractor for 99.99% dust free, OSHA approved operation

## TECHNICAL DATA

<b>Item #</b>	SC.12.020
<b>Required Circuit</b>	Gas Powered
<b>Motor Output</b>	11.7 HP / 8.6 kW
<b>Cutting Width</b>	12 in (305 mm) max.
<b>Cutting Depth</b>	1" (25mm) max.
<b>Machine Weight</b>	350 lbs (159 kg)
<b>Dimensions (LxHxW)</b>	52" x 45" x 22" (1320 x 1194 x 559 mm)
<b>Item #</b>	SC.12.041
<b>Required Circuit</b>	3 Ø / 460 volt / 30 amp
<b>Motor Output</b>	5 HP / 3.7 kW
<b>Item #</b>	SC.12.040
<b>Required Circuit</b>	3 Ø / 230 volt / 40 amp
<b>Motor Output</b>	5 HP / 3.7 kW

# SC10E

## SCARIFIER

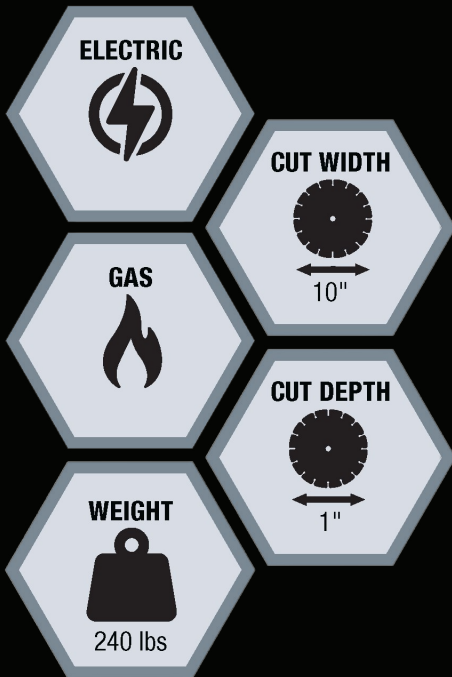

## SASE® SC10E SCARIFIER

The SASE® SC10E Scarifier is the industry most durable and productive scarifier in the industry. It has various power options including a gas powered version allowing for untethered operation.



## FEATURES

- Ideal for small spaces, yet powerful enough for large projects
- Compact for easy handling and transportation
- Side access drum assembly for quick and easy cutter changes
- Heavy-duty hex shaft
- Sealed bearings and no exposed moving parts
- Equipped with an emergency stop safety cord
- Connects to SASE® Bull 300 EBS industrial dust extractor for 99.99% dust free, OSHA approved operation


## TECHNICAL DATA

<b>Item #</b>	SC.10.020
<b>Required Circuit</b>	Gas Powered
<b>Motor Output</b>	9 HP / 6.6 kW
<b>Cutting Width</b>	10 in (254 mm) max.
<b>Cutting Depth</b>	10 in (254 mm) max.
<b>Machine Weight</b>	240 lbs (109 kg)
<b>Dimensions (LxHxW)</b>	39" x 45" x 18" (991 x 1143 x 457 mm)
<b>Item #</b>	SC.10.042
<b>Required Circuit</b>	3 Ø / 230 volt / 11.6 amp
<b>Motor Output</b>	5 HP / 3.7 kW
<b>Item #</b>	SC.10.040
<b>Required Circuit</b>	1 Ø / 230 volt / 19.5 amp
<b>Motor Output</b>	5 HP / 3.7 kW



# SC8E

## SCARIFIER

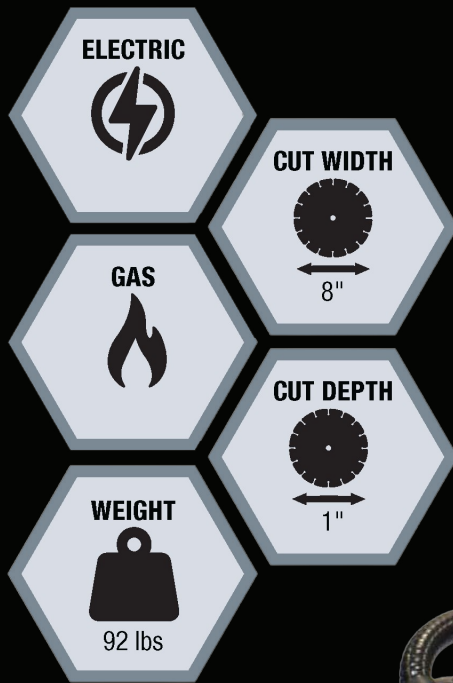

## SASE® SC8E SCARIFIER

The SASE® SC8E Scarifier is the industry most durable and productive scarifier in the industry. It has various power options including a gas powered version allowing for untethered operation.



## FEATURES


- Uncompromising performance in a small package
- Compact for easy handling and transportation
- Side access drum assembly for quick and easy cutter changes
- Heavy-duty hex shaft
- Sealed bearings and no exposed moving parts
- Equipped with an emergency stop safety cord
- Connects to SASE® Bull 300 EBS industrial dust extractor for 99.99% dust free, OSHA approved operation
- Use 300 or 240 EBS Vacuum

## TECHNICAL DATA

<b>Item #</b>	SC.08.020
<b>Required Circuit</b>	Gas Powered
<b>Motor Output</b>	5.5 HP / 4.5 kW
<b>Cutting Width</b>	8 in (203 mm) max.
<b>Cutting Depth</b>	1" (25mm) max.
<b>Machine Weight</b>	92 lbs (42 kg)
<b>Dimensions (LxHxW)</b>	47" x 34" x 14" (1194 x 864 x 356 mm)
<b>Item #</b>	SC.08.046
<b>Required Circuit</b>	3 Ø / 460 volt / 7.2 amp
<b>Motor Output</b>	3 HP / 2.2 kW
<b>Item #</b>	SC.08.044
<b>Required Circuit</b>	3 Ø / 230 volt / 7.2 amp
<b>Motor Output</b>	3 HP / 2.2 kW
<b>Item #</b>	SC.08.042
<b>Required Circuit</b>	1 Ø / 230 volt / 7.2 amp
<b>Motor Output</b>	3 HP / 2.2 kW
<b>Item #</b>	SC.08.040
<b>Required Circuit</b>	1 Ø / 110 volt / 20 amp
<b>Motor Output</b>	2 HP / 1.5 kW


# TUNGSTEN CUTTERS



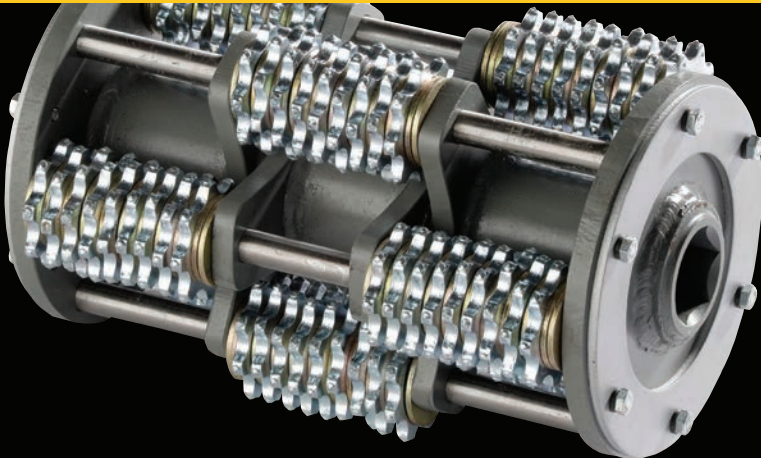





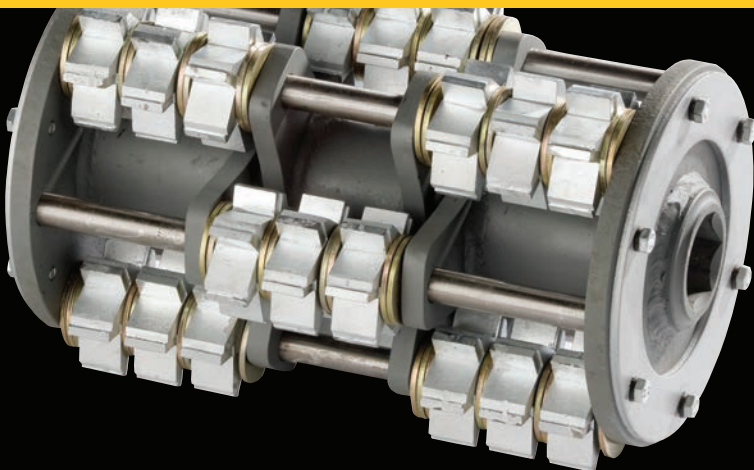




SASE® Scarifier Cutters are used for surface preparation, concrete grinding applications for the removal of hard coatings.



# MILLING CUTTERS

SASE® Milling Cutters are used for the removal of thick to thin mil coatings.









	<b>Product</b> Small 5 Point	<b>Item #</b> 615.01.07	
	<b>Inner Dia.</b> 16mm ( $\frac{5}{8}$ "	<b>Outer Dia.</b> 40mm ( $1\frac{9}{16}$ "	<b>Thickness</b> 6mm ( $\frac{15}{64}$ "
	<b>Used With</b> SC8E, FR200, FS200, CPM8, SPS8		
	<b>Product</b> Small 6 Point	<b>Item #</b> 615.01.14	
	<b>Inner Dia.</b> 15.2mm ( $\frac{19}{32}$ "	<b>Outer Dia.</b> 44mm ( $1\frac{47}{64}$ "	<b>Thickness</b> 6mm ( $\frac{15}{64}$ "
	<b>Used With</b> SC8E, FR200, FS200, CPM8, SPS8		
	<b>Product</b> Medium 8 Point	<b>Item #</b> 615.08.31	
	<b>Inner Dia.</b> 18.3mm ( $\frac{23}{32}$ "	<b>Outer Dia.</b> 56.37mm ( $2\frac{7}{32}$ "	<b>Thickness</b> 6mm ( $\frac{15}{64}$ "
	<b>Used With</b> SC10E, VA25S, CPM10, SPS10		
	<b>Product</b> Medium 8 Point	<b>Item #</b> 615.08.30	
	<b>Inner Dia.</b> 25.2mm ( $\frac{63}{64}$ "	<b>Outer Dia.</b> 55.6mm ( $2\frac{3}{16}$ "	<b>Thickness</b> 6mm ( $\frac{15}{64}$ "
	<b>Used With</b> RM320		
	<b>Product</b> Large 8 Point	<b>Item #</b> 620.01.13	
	<b>Inner Dia.</b> 30mm ( $1\frac{3}{16}$ "	<b>Outer Dia.</b> 81mm ( $3\frac{3}{16}$ "	<b>Thickness</b> 7.8mm ( $\frac{5}{16}$ "
	<b>Used With</b> SC12E, VA30S		
	<b>Product</b> Large 12 Point	<b>Item #</b> 620.01.14	
	<b>Inner Dia.</b> 26mm ( $1\frac{1}{32}$ "	<b>Outer Dia.</b> 80mm ( $3\frac{9}{64}$ "	<b>Thickness</b> 8mm ( $\frac{5}{16}$ "
	<b>Used With</b> SC12E, VA30S, Truck Grinder		
	<b>Product</b> Large 12 Point	<b>Item #</b> 630.03.10	
	<b>Inner Dia.</b> 30.16mm ( $1\frac{3}{16}$ "	<b>Outer Dia.</b> 77.79mm ( $3\frac{1}{16}$ "	<b>Thickness</b> 7.94mm ( $\frac{5}{16}$ "
	<b>Used With</b> Truck Grinder		
	<b>Product</b> Large 12 Point	<b>Item #</b> 630.03.13	
	<b>Inner Dia.</b> 33.02mm ( $1\frac{3}{10}$ "	<b>Outer Dia.</b> 80mm ( $3\frac{9}{64}$ "	<b>Thickness</b> 7.84mm ( $\frac{5}{16}$ "
	<b>Used With</b> Truck Grinder		
	<b>Product</b> Small	<b>Item #</b> 615.01.11	
	<b>Inner Dia.</b> 16mm ( $\frac{5}{8}$ "	<b>Outer Dia.</b> 40mm ( $1\frac{9}{16}$ "	<b>Thickness</b> 22.23mm ( $\frac{7}{8}$ "
	<b>Used With</b> SC8E, FR200, FS200		
	<b>Product</b> Medium	<b>Item #</b> 644.01.13	
	<b>Inner Dia.</b> 18mm ( $\frac{23}{32}$ "	<b>Outer Dia.</b> 57mm ( $2\frac{1}{4}$ "	<b>Thickness</b> 20mm ( $\frac{25}{32}$ "
	<b>Used With</b> SC10E, VA25S, CPM8, CPM10, SPS10		
	<b>Product</b> Medium	<b>Item #</b> 644.06.80	
	<b>Inner Dia.</b> 20mm ( $\frac{25}{32}$ "	<b>Outer Dia.</b> 57mm ( $2\frac{1}{4}$ "	<b>Thickness</b> 20mm ( $\frac{25}{32}$ "
	<b>Used With</b> SC10E, VA25S, CPM8, CPM10, SPS10		
	<b>Product</b> Large	<b>Item #</b> 630.03.08	
	<b>Inner Dia.</b> 29.5mm ( $1\frac{5}{32}$ "	<b>Outer Dia.</b> 80mm ( $3\frac{9}{64}$ "	<b>Thickness</b> 40mm ( $1\frac{9}{16}$ "
	<b>Used With</b> SC12E, VA30S		
	<b>Product</b> Large Thin	<b>Item #</b> 630.03.09	
	<b>Inner Dia.</b> 29.5mm ( $1\frac{5}{32}$ "	<b>Outer Dia.</b> 80mm ( $3\frac{9}{64}$ "	<b>Thickness</b> 20mm ( $2\frac{5}{32}$ "
	<b>Used With</b> SC12E, VA30S, Truck Grinder		



# STEEL CUTTERS

SASE® Steel Cutters are used for removal of coatings for surface preparation without damaging the underlying surface. It is also good for road marking removal.



	<b>Product</b> Small	<b>Item #</b> 15465
	<b>Inner Dia.</b> 12mm (1/2")	<b>Outer Dia.</b> 32.5mm (1 1/4")
		<b>Thickness</b> 6.5mm (1/4")
	<b>Used With</b> SC8E, FR200, FS200	
	<b>Product</b> Angle Cutter	<b>Item #</b> 615.01.02
	<b>Inner Dia.</b> 16mm (5/8")	<b>Outer Dia.</b> 41.12mm (1 5/8")
		<b>Thickness</b> 3.13mm (1/8")
	<b>Used With</b> SC8E, FR200, FS200	
	<b>Product</b> Small	<b>Item #</b> 615.01.04
	<b>Inner Dia.</b> 16mm (5/8")	<b>Outer Dia.</b> 41.13mm (1 5/8")
		<b>Thickness</b> 3.25mm (1/8")
	<b>Used With</b> SC8E, FR200, FS200	
	<b>Product</b> Large	<b>Item #</b> 644.04.06
	<b>Inner Dia.</b> 15.6mm (5/8")	<b>Outer Dia.</b> 50.13mm (1 31/32")
		<b>Thickness</b> 3.83mm (9/64")
	<b>Used With</b> SC10E, VA25S, CPM10, SPS10	
	<b>Product</b> Large Tooth	<b>Item #</b> CHS.30.01
	<b>Inner Dia.</b> 26.4mm (1 3/64")	<b>Outer Dia.</b> 75.5mm (2 31/32")
		<b>Thickness</b> 4.8mm (9/16")
	<b>Used With</b> SC12E, VA30S, Truck Grinders	
	<b>Product</b> Large Tooth	<b>Item #</b> CHS.30.02
	<b>Inner Dia.</b> 29.8mm (1 11/64")	<b>Outer Dia.</b> 75mm (2 61/64")
		<b>Thickness</b> 4mm (5/32")
	<b>Used With</b> SC12E, VA30S, Truck Grinders	

## PCD DIAMOND DRUM



PCD Diamond drums is used for high levels of concrete removal. It is great for concrete inlays when removing an area of concrete that needs to be patched.

Item #	Product	Used With
SC.10.500	PCD Diamond Drum	SC12E, VA30S

## ROTARY CUTTER



Replacement cutter for most walk-behind and skid steer rotary grinders.


Item #	Product	Used With
681.01.18	Individual Cutter / 48 Pins	TLR7, PM Eraser, LNX8, SCR7 and X3 Triple Head Eraser
681.01.15	Set of (3) 144 Pins	TLR7, PM Eraser, LNX8, SCR7 and X3 Triple Head Eraser

**SCARIFIER ASSEMBLED DRUMS, CUTTER SETS, DRUMS & FLAIL SHAFTS**



**12" Drum with TCT Cutters**

Item #	Description
630.LT8.64/196	Drum assembly complete with (64) TCT Cutters & (196) Spacers
630.LT12.72/180	Drum assembly complete with (72) TCT Cutters & (180) Spacers
630.LRM.12/208	Drum assembly complete with (12) Milling Cutters & (208) Spacers
630.LRM.16/160	Drum assembly complete with (16) Milling Cutters & (160) Spacers
630.LRM.20/120	Drum assembly complete with (20) Milling Cutters & (120) Spacers



**Set of TCT Cutters**

Item #	Description
800.LT8.64/196	Set of (64) TCT Cutters & (196) Spacers (Drum not Included)
800.LT12.64/196	Set of (64) TCT Cutters & (196) Spacers (Drum not Included)

**Set of Milling Cutters**

Item #	Description
800.LRM.12/208	Set of (12) Milling Cutters & (208) Spacers (Drum not Included)
800.LRM.16/160	Set of (16) Milling Cutters & (160) Spacers (Drum not Included)
800.LRM.20/120	Set of (20) Milling Cutters & (120) Spacers (Drum not Included)



Item #	Product	Description
652.OU.MS.189/00	10" Drum with Steel Cutters	Drum assembly complete with (189) Steel Cutters & (0) Spacers
652.OU.MT8.81/108	10" Drum with TCT Cutters	Drum assembly complete with (81) TCT Cutters & (108) Spacers
652.OU.MRM.27/81	10" Drum with Milling Cutters	Drum assembly complete with (27) Milling Cutters & (81) Spacers
800.MS.189/00	Set of Steel Cutters	Set of (189) Steel Cutters & (0) Spacers (Drum not Included)
800.MT8.81/108	Set of TCT Cutters	Set of (81) TCT Cutters & (108) Spacers (Drum not Included)
800.MRM.27/81	Set of Milling Cutters	Set of (27) Milling Cutters & (81) Spacers (Drum not Included)



Item #	Product	Description
625.SS.260/00	8" Drum with Steel Cutters	Drum assembly complete with (260) Steel Cutters & (0) Spacers
625.ST5.72/100	8" Drum with TCT Cutters	Drum assembly complete with (72) TCT Cutters & (100) Spacers
625.SRM.20/100	8" Drum with Milling Cutters	Drum assembly complete with (20) Milling Cutters & (100) Spacers
800.SS.260/00	Set of Steel Cutters	Set of (260) Steel Cutters & (0) Spacers (Drum not Included)
800.ST5.72/100	Set of TCT Cutters	Set of (72) TCT Cutters & (100) Spacers (Drum not Included)
800.SRM.20/100	Set of Milling Cutters	Set of (20) Milling Cutters & (100) Spacers (Drum not Included)



Item #	Product	Description
SC.08.500	8" Scarifier Drum	Scarifier drum used with FR200 / SC8E scarifiers
65051	8" Scarifier Drum	Scarifier drum used with CPM8 / SPS8 scarifiers
SC.10.505	10" Scarifier Drum	Scarifier drum for VA25S / SC10E scarifiers
64251	10" Scarifier Drum	Scarifier drum for CPM10 / SPS10 scarifiers
SC.12.505	12" Scarifier Drum	Scarifier drum for VA3-0S / SC12E scarifiers



Item #	Product	Description
SC.08.510	8" Drum Flail Shaft	Scarifier flail shaft used with 8" scarifiers
20150	1/2" Diameter Flail Shaft	Scarifier flail shaft used with CPM8 / SPS8 scarifiers
90150	9/16" Diameter Flail Shaft	Scarifier flail shaft used with CPM8 / SPS8 scarifiers
SC.10.510	10" Drum Regular Flail Shaft	Scarifier flail shaft used with 10" scarifiers
SC.10.520	10" Drum Super Flail Shaft	Super duty scarifier flail shaft used with 10" scarifiers
21490	10" Drum Flail Shaft	Scarifier flail shaft used with CPM10 / SPS10 scarifiers
SC.12.500	12" Drum Flail Shaft	Scarifier flail shaft used with 12" scarifiers



Item #	Product	Description
625.06.09A	Spacer for 8" Drums	Spacer used on flail shafts between cutters for 8" scarifier drums
625.06.916	Spacer for 10" Drums	Spacer used on flail shafts between cutters for 10" scarifier drums
630.03.06	Spacer for 12" Drums	Spacer used on flail shafts between cutters for 12" scarifier drums
625.07.916	Spacer for SPS / CPM	Spacer used on flail shafts between cutters for SPS / CPM drums
615.08.80	Spacer for Truck Grinders	Spacer used on flail shafts between cutters for truck grinder drums


# FLOOR SCRAPERS








# CYCLONE

## FLOOR SCRAPER

**BATTERY**  


**WEIGHT**  
  
2,800 lbs

**SPEED**  
  
350 FPM

**REMOVABLE WEIGHT**  
  
720 lbs



## SASE® CYCLONE FLOOR SCRAPER

The SASE® Cyclone is an incredibly powerful, battery powered floor scraper. It comes complete with a 230 volt, mobile charger. The Cyclone offers all the power and production of a propane powered machine, yet it runs at a fraction of the noise with zero emissions and fumes.



## FEATURES


- Most efficient battery powered floor scraper in the industry
- Triple blade action to maneuver, angle and pivot the scraper blade
- Fits through standard doorways and on elevators
- Comes standard with 230 volt, mobile charger
- Single joystick control for speed, steering & direction
- Up to 12 hours of run time on a single, full charge
- Ideal for the removal of VCT, laminates and carpet
- Can remove up to (6) batteries (120 lbs each) to lighten weight for transport in elevators where weight can be limited


## TECHNICAL DATA


<b>Item #</b>	OEM.CYCLONE
<b>Required Circuit</b>	Battery Powered
<b>Movement Speed</b>	350 ft per min. (107 m)
<b>Machine Weight</b>	2,800 lbs (1,270 kg)
<b>Removable Weight</b>	720 lbs (326 kg)
<b>Dimensions</b> (LxHxW)	39" x 45" x 18" (991 x 1143 x 457 mm)


# TWISTER

## FLOOR SCRAPER

**PROPANE**  


**WEIGHT**  
  
4,200 lbs

**SPEED**  
  
500 FPM

**REMOVABLE WEIGHT**  
  
2,017 lbs





## SASE® TWISTER FLOOR SCRAPER

The SASE® Twister is the most productive, ride-on floor scraper in the industry. When it comes to the toughest removal jobs or the need for speed, there simply is no machine that will compare. It is built with ample horsepower and weighs over 4,200 lbs.



## FEATURES


- Ideal for heavy-duty flooring removal
- Triple blade action to maneuver, angle and pivot the scraper blade
- Compact design maneuvers through hallways with ease
- Powerful 58 HP Hyundai, 1.6 liter propane engine
- Single joystick control for speed, steering & direction
- Ideal for removal of VCT, hardwood, laminates, ceramic tile, rubberized coatings, carpet and more!


## TECHNICAL DATA


<b>Item #</b>	OEM.TWISTER
<b>Required Circuit</b>	Propane Powered
<b>Movement Speed</b>	500 ft per min (152 m)
<b>Machine Weight</b>	4,200 lbs (1,905 kg)
<b>Removable Weight</b>	2,017 lbs (915 kg)
<b>Dimensions</b> (LxHxW)	62" x 72" x 26" (1575 x 1829 x 660 mm)


# HURRICANE

## FLOOR SCRAPER

**PROPANE**  


**WEIGHT**  
  
2,800 lbs

**SPEED**  
  
440 FPM

**REMOVABLE WEIGHT**  
  
1,494 lbs



## SASE® HURRICANE FLOOR SCRAPER

The SASE® Hurricane is a propane, ride-on floor scraper offering the most versatility of any floor scraper on the market. It is compact enough to get into the smallest of rooms and elevators, yet heavy and powerful enough to handle all removal projects.



## FEATURES

- Most versatile floor scraper in the industry
- Triple blade action to maneuver, angle and pivot the scraper blade
- Fits through standard doorways and on elevators
- Powerful 25 HP Kohler propane engine
- Single joystick control for speed, steering & direction
- Ideal for removal of VCT, hardwood, laminates, ceramic tile, rubberized coatings, carpet and more!


## TECHNICAL DATA


<b>Item #</b>	OEM.HURRICANE
<b>Required Circuit</b>	Propane Powered
<b>Movement Speed</b>	440 ft per min (134 m)
<b>Machine Weight</b>	2,800 lbs (1,270 kg)
<b>Removable Weight</b>	1,494 lbs (678 kg)
<b>Dimensions</b> (LxHxW)	58" x 58" x 25" (1473 x 1473 x 635 mm)





# LIGHTNING

## FLOOR SCRAPER

**PROPANE**  


**WEIGHT**  
  
1,950 lbs

**SPEED**  
  
330 FPM

**REMOVABLE WEIGHT**  
  
670 lbs



## SASE® LIGHTNING FLOOR SCRAPER

The SASE® Lightning is the most cost effective, ride-on floor scraper on the market. Weighing in at 1,950 lbs and powered by a robust, 25 HP Kohler propane engine, this machine is a real workhorse. At only 26" wide and 52" long, the Lightning is small enough to fit into the tightest of places.



### FEATURES


- Most powerful and cost effective floor scraper in its class
- Triple blade action to maneuver, angle and pivot the scraper blade
- Compact design for tight spaces
- Powerful 25 HP Kohler propane engine
- Single joystick control for speed, steering & direction
- Ideal for removal of VCT, hardwood and carpet

### TECHNICAL DATA

<b>Item #</b>	OEM.LIGHTNING
<b>Required Circuit</b>	Propane Powered
<b>Movement Speed</b>	330 ft per min (101 cm)
<b>Machine Weight</b>	1,950 lbs (885 kg)
<b>Removable Weight</b>	670 lbs (304 kg)
<b>Dimensions (LxHxW)</b>	52" x 51" x 26" (1321 x 1295 x 660 mm)

# STINGER

## FLOOR SCRAPER

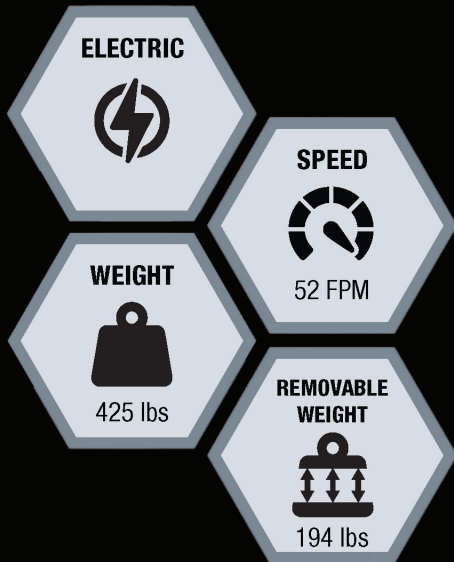



## SASE® STINGER FLOOR SCRAPER

The SASE® Stinger Walk-Behind Floor Scraper is an economical floor scraper that packs a big punch. Weighing in at 425 total pounds and collapsible down to 23 inches in height makes this scraper easy to transport. Powered by a 110v, 1.5 HP electrical motor driving an orbital cutter this machine makes quick work of most materials.



## FEATURES

- Self-propelled forward and reverse
- Forward speed control with full speed reverse
- 6 position adjustable handle
- Simple and robust components for long service life and less maintenance
- Removable weights for easy transportation
- Patented design improves efficiency significantly over other hydraulic machines

## TECHNICAL DATA

<b>Item #</b>	SAS.SCRAPER
<b>Required Circuit</b>	110 volt / 20 amp
<b>Motor Output</b>	1.5 HP (1 kW)
<b>Movement Speed</b>	52 ft per min (1585 cm)
<b>Cutting Action</b>	Orbital 3510 RPM
<b>Machine Weight</b>	425 lbs (193 kg)
<b>Removable Weight</b>	194 lbs (88 kg)
<b>Dimensions (LxHxW)</b>	29" x 16.5" x 42.5" (737 x 419 x 1080 mm)

# FLOOR SCRAPER BLADES

SASE® manufactures floor scraper blades ranging from 4” to 28” all in standard, heavy-duty and carpet blade versions.



Blade Size	Flat Blades For removal of VCT & thin floor covering	Carpet Blades For removal of carpet	Heavy Duty Blades For removal of thicker coatings, rubberized coverings & VCT
4"	XTFBL04	-	XTHDB04
6"	XTFBL06	XTCBL06	XTHDB06
8"	XTFBL08	XTCBL08	XTHDB08
9"	XTFBL09*	XTCBL09	-
10"	XTFBL10	XTCBL10	XTHDB10
12"	XTFBL12	XTCBL12	XTHDB12
13"	XTFBL13	XTCBL13	-
14"	XTFBL14	-	XTHDB14
15"	XTFBL15	XTCBL15	XTHDB15*
16"	XTFBL16	XTCBL16	XTHDB16
18"	XTFBL18	XTCBL18	XTHDB18
20"	XTFBL20	XTCBL20	XTHDB20*
24"	XTFBL24	XTCBL24*	XTHDB24*
26"	XTFBL26*	XTCBL26*	-
28"	-	XTCBL28*	-

\* Blades made to order

## FLOOR SCRAPER ACCESSORIES



Item #	Product	Description
OEM.00TT2	Tile Tooth	Used for removing ceramic tile. For use with all SASE® Floor Scrapers but recommended for only SASE® Twister & Cyclone only.



Item #	Product	Description
OEM.00TTA	Tile Tooth Holder Attachment	Tile Tooth holder attachment for removing ceramic tile. For use with all SASE floor scrapers but recommended for only SASE® Twister & Cyclone only.




Item #	Product	Description
OEM.TWA001	Travel Dolly	Used to attached on front of floor scraper for transportation. For use with all SASE® Floor Scrapers. *Special order only.

# CONCRETE REPAIR

## CHEMICALS & DYES



 CONCRETE REPAIR

 CHEMICALS & DYES



# CONCRETE REPAIR PRODUCTS

SASE® has a complete line of concrete repair products all made specifically for polished concrete and coatings applications. From fixing small to larger spalled areas, grout coating, crack repair to joint filling, SASE® has you covered for reliable, tried and true concrete repair products!

## ALL SPALL 3

Rapid set spall repair and grout coat system.

## Flex Joint 85

Rapid cure, polyurea, moisture insensitive, self-leveling joint filler



**All Spall 3 - 10 Gallon Kit**  
SAS.ASP.KIT.10

**All Spall 3 - 2 Gallon Kit**  
SAS.ASP.KIT.02

**Flex Joint 85 - 10 Gallon Kit**  
SAS.FXJ.KIT.10



### All Spall 3 Tint Packs / 22 oz. Cartridges

Tint Color	All Spall 3 - 10 Gallon Kit Tint Packs	All Spall 3 - 2 Gallon Kit Tint Packs	All Spall 3 - 22 oz. Cartridges
Grizzle Grey	SAS.ASP.GZG.10	SAS.ASP.GZG.02	SAS.ASP.GZG.OZ
Standard Grey	SAS.ASP.STG.10	SAS.ASP.STG.02	SAS.ASP.STG.OZ
Gauntlet Grey	SAS.ASP.GTG.10	SAS.ASP.GTG.02	SAS.ASP.GTG.OZ
Warmstone	SAS.ASP.WMS.10	SAS.ASP.WMS.02	SAS.ASP.WMS.OZ
Mocha	SAS.ASP.MCH.10	SAS.ASP.WMS.02	SAS.ASP.MCH.OZ
French Roast	SAS.ASP.FRR.10	SAS.ASP.FRR.02	SAS.ASP.FRR.OZ
Dovetail	SAS.ASP.DVT.10	SAS.ASP.DVT.02	SAS.ASP.DVT.OZ



Flex Joint 85 Tint Packs / 22oz Cartridges (Flex Joint 85 / Flo-Mender / EZ-Fill Pro)				
Tint Color	Flex Joint 85 - 10 Gallon Kit Tint Packs	Flex Joint 85 - 22 oz. Cartridges	Flo-Mender - 22 oz. Cartridges	EZ-Fill Pro - 22 oz. Cartridges
Grizzle Grey	SAS.FXJ.GZG.10	SAS.FXJ.GZG.OZ	SAS.FMD.GZG.OZ	SAS.EZP.GZG.OZ
Standard Grey	SAS.FXJ.STG.10	SAS.FXJ.STG.OZ	-	-
Gauntlet Grey	SAS.FXJ.GTG.10	SAS.FXJ.GTG.OZ	-	-
Warmstone	SAS.FXJ.WMS.10	SAS.FXJ.WMS.OZ	SAS.FMD.WMS.OZ	SAS.EZP.WMS.OZ
Mocha	SAS.FXJ.MCH.10	SAS.FXJ.MCH.OZ	-	-
French Roast	SAS.FXJ.FRR.10	SAS.FXJ.FRR.OZ	-	-
Dovetail	SAS.FXJ.DVT.10	SAS.FXJ.DVT.OZ	-	-

# POLY PUMP

## CONCRETE REPAIR



**BATTERY**  


**WEIGHT**  
  
190 lbs

**SPEED**  
  
550 RPM





## SASE® POLY PUMP 10

The SASE® Poly Pump 10 saves time and labor costs and reduces material cost by over 70%! The SASE® battery powered automatic pump for concrete repair features a heavy duty welded steel construction with a solid base and non-marking caster wheels makes this machine very reliable and easy to operate. It includes a 15ft hose and on/off pump switch for easy, one person operation.



## FEATURES


- 6.7 gallon tanks easily accommodates 10 gallon kits of All Spall 3 or Flex Joint 85 (5 gallon each of A and B)
- Integrated battery, inverter and charger (8 hours of use out of single charge)
- Manifold clean-out valves simplify cleaning and make it easy to pump left over material back into buckets
- 15ft hoses with on/off pump switch makes for easy, one person operation
- Heavy duty welded steel construction with a solid base and non-marking caster wheels prevent material from dripping onto the floor


## TECHNICAL DATA


<b>Item #</b>	SAS.PMP.001
<b>Required Circuit</b>	1/2 HP DC Gear Motor / 110 volt / 5.5 amps
<b>RPM</b>	0 - 550
<b>Machine Weight</b>	190 lbs (86 kg)
<b>Dimensions (LxHxW)</b>	30" x 38.5" x 27" (762 x 978 x 686 mm)


# JOINT SAW

## CONCRETE REPAIR

**ELECTRIC**  


**CUT WIDTH**  
  
7-9"

**WEIGHT**  
  
70 lbs

**CUT DEPTH**  
  
3"



## JOINT SAW

The SASE® Joint Saw is a heavy-duty machine made for concrete joint clean-out. It has a durable rear wheels a rugged frame for precise, straight line joint clean-out. The SASE® Joint Saw has an integrated 2" dust port that connects to OSHA Approved, SASE® dust extractors (recommended SASE® Bull 240 or 300 EBS dust extractors).



## FEATURES

- Heavy-duty, 1/4" welded steel frame
- Joint clean-out in a stand-up, easy-to-use machine
- Durable wheels and rugged frame for precise, straight line joint clean-out
- Integrated 2" dust port that connect to OSHA Approved, SASE dust extractors
- Adjustable saw depth with handle that lowers and raises the saw blade
- Utilizes a variety of SASE concrete joint clean-out saw blades


## TECHNICAL DATA

<b>Item #</b>	SAS.SAW10
<b>Required Circuit</b>	110v / 15 amp
<b>Grinder Model</b>	Metabo W24-230
<b>Cutting Depth</b>	Adjustable - 3" max (76 mm max)
<b>Blade Size</b>	7 - 9" (180 - 220 mm)
<b>Blade Width</b>	Up to 1/4" (6.35 mm)
<b>Machine Weight</b>	70 lbs (32 kg)
<b>Dimensions (LxHxW)</b>	35" x 38" x 14" (889 x 965 x 335 mm)



# CHASING SAW

## JOINT & CRACK REPAIR

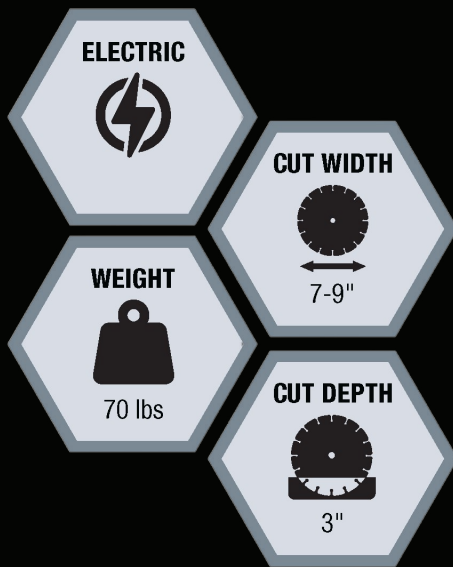

## JOINT & CRACK CHASING SAW

The SASE® Joint & Crack Chasing saw is a convertible, heavy-duty machine made for BOTH concrete joint clean-out and crack chasing applications. The Joint & Crack Chasing Saw has durable rear caster wheels can be locked for precise, straight line joint clean-out or unlocked for complete control on winding, crack chasing applications. Both shrouds have integrated 2" dust port that connect to OSHA Approved, SASE® dust extractors.



## FEATURES

- Heavy-duty, 1/4" welded steel frame
- Joint clean-out and crack chasing capabilities all in one, easy-to-use machine
- Durable rear caster wheels lock for precise, straight line joint clean-out or unlock for complete control on winding, crack chasing applications
- Includes smaller, open shroud allowing more visibility during crack chasing applications
- Both shrouds have integrated 2" dust port that connect to OSHA Approved, SASE dust extractors
- Adjustable saw depth with handle that lowers and raises the saw blade
- Utilizes a variety of SASE concrete joint clean-out and crack chasing saw blades

## TECHNICAL DATA

<b>Item #</b>	SAS.SAW09
<b>Required Circuit</b>	110v / 15 amp
<b>Grinder Model</b>	Metabo W24-230
<b>Cutting Depth</b>	Adjustable - 2 1/8" max (54 mm max)
<b>Blade Size</b>	7 - 9" (180 - 220 mm)
<b>Blade Width</b>	Up to 3/8" (9.525 mm)
<b>Machine Weight</b>	70 lbs (32 kg)
<b>Dimensions (LxHxW)</b>	35" x 38" x 14" (889 x 965 x 335 mm)

# SAW BLADES



## Saw Blade Guide

Item #	Product Name	Blade Diameter	Blade Width	Arbor Diameter	Description
SAS.SAW07.02	Vacuum Brazed Blade	7"	3.3mm	5/8"	Ideal for joint fill removal and joint clean-out. Can also be used for crack chasing.
SAS.SAW07.01	Standard Blade	7"	2.5mm	5/8"	Ideal for joint clean-out for narrow joints. Can also be used for crack chasing.
SAS.SAW07.03	Wide Tuck Point Blade	7"	6.6mm	5/8"	Ideal for joint clean-out for wide joints. Can also be used to make a narrow joint more wide.
SAS.SAW07.04	V-band Crack Chasing Blade	7"	6mm	5/8"	Ideal for crack chasing. V-shaped segments allow blade to cut winding cracks more efficiently than standard blades.
SAS.SAW07.05	PCD Ripper Blade	7"	5mm	5/8"	Idea for removal of existing joint compound. Each segment has a PCD attached for maximum removal.





# CONCRETE CHEMICALS

SASE® has a complete range of premium concrete chemicals within the SASE® Signature Floor System® complete with densifiers, sealers, guards and cleaner and even a product to help with that initial cut or to help with cutting extremely hard concrete. SASE® has pride in that all of the SASE® Signature Floor System® chemicals are on the cutting edge of technology. Technical Data Sheets (TDS) and Safety Data Sheets (SDS) are available for download at [SASECompany.com](http://SASECompany.com).



SAS.SFSAID

## SASE® GrindAid - Rapid Cutting Agent

SASE® GrindAid is a water-based, pretreatment, rapid cutting agent used for the initial cut on hard, dense concrete. It also helps with exposing large aggregate faster than dry only or standard wet methods. GrindAid works by dramatically increasing the productivity of lower grit diamond tooling. It achieves this by suspending concrete solids away from the surface for maximum efficiency thus shortening project timelines, reducing labor costs and extending the life of diamond tooling.



### COVERAGE RATE

200 - 400 SQ FT  
PER GALLON



SAS.SFSD1

## SASE® D1 - Low Solids Densifier

SASE® D1 is a water-based, low VOC (1g/L), premium-hybrid multi-silicate densifier that increases surface hardness, reduces dusting and improves stain resistance for new or existing concrete and cement terrazzo floors. Unlike typical densifier, SASE® SFS D1 penetrates concrete surfaces at different levels ensuring hardening of the wear surface regardless of porosity.



### COVERAGE RATE

500 - 750 SQ FT  
PER GALLON



SAS.SFSD2

## SASE® D2 - High Solids Densifier

SASE® D2 is a water-based, low VOC (1g/L), premium-hybrid multi-silicate densifier that increases surface hardness, reduces dusting and improves stain resistance for new or existing concrete and cement terrazzo floors. Unlike typical densifier, SASE® SFS D2 penetrates concrete surfaces at different levels ensuring hardening of the wear surface regardless of porosity.



### COVERAGE RATE

750 - 1,000 SQ FT  
PER GALLON

# CONCRETE CHEMICALS



SAS.SFS.PROSLCT

## SASE® Protect Select - Semi-topical / Semi-Penetrating Guard

SASE® Protect Select is a premium-hybrid copolymer, film forming protective treatment, water-based sealer that enhances sheen and stain resistance for concrete and cement terrazzo floors. This product resists scuffing and surface abrasion and provides water and stain resistance. It can also be burnished very quickly after applying.



**COVERAGE RATE**  
2,000 - 2,500 SQ FT  
PER GALLON



SAS.SFSR3

## SASE® SPR3 - Fully Penetrating Sealer

SASE® SPR3 is a premium hybrid solvent-based low VOC (5g/L), clear, fully penetrating oil and water repellent sealer. It penetrates deep within untreated or densified concrete and hard surfaces such as marble and stone without leaving a topical residue.



**COVERAGE RATE**  
3,000 - 3,500 SQ FT  
PER GALLON



SAS.SFSR3WB

## SASE® SPR3 WB - Fully Penetrating Sealer (water-based)

SASE® SPR3 WB is a premium hybrid water-based low VOC (5g/L), clear, fully penetrating oil and water repellent sealer. It penetrates deep within untreated or densified concrete and hard surfaces such as marble and stone without leaving a topical residue. It is a great alternative where solvent-based products are not applicable.



**COVERAGE RATE**  
1,250 - 1,500 SQ FT  
PER GALLON



SAS.32.CLEAN

## SASE® Cleaner - Concentrated Polished Concrete Cleaner


SASE® Cleaner is a concentrated, low VOC cleaner specifically designed for concrete floors. It removes dirt, grease and other contaminants while preserving the concrete surface. It comes with an easy to use tilt-measure bottle for simple dilution.

Normal Cleaning - 1oz per Gallon

Heavy Cleaning - 2oz per Gallon

# SASE® CONCRETE DYE

SASE® Concrete Dye is available in two options, Liquid Concentrate and Powder. The Liquid Concentrate is unique due to its ability to be mixed with water when applied. Both options can be mixed with acetone or other unique, industry dye carriers. SASE® Concrete Dyes come in small packages that are meant to be mixed in the appropriate amount of the chosen carrier before applying (i.e. 1 gallon Liquid Concentrate product mixes with 1 gallon of water or acetone).

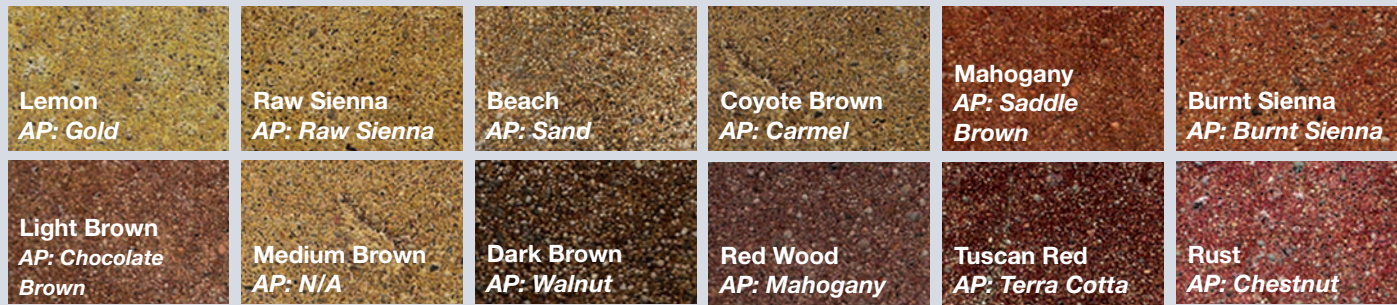

## SASE® Concrete Dyes

Dye Color	Liquid Concentrate		Powder Dye	
	5 Gallon (Makes 5 gallons)	1 Gallon (Makes 1 gallon)	5 Gallon (Makes 5 gallons)	1 Gallon (Makes 1 gallon)
Lemon	SAS.LEM5G	SAS.LEM1G	SAS.PLEM5G	SAS.PLEM1G
Raw Sienna	SAS.RAS5G	SAS.RAS1G	SAS.PRAS5G	SAS.PRAS1G
Beach	SAS.BCH5G	SAS.BCH1G	SAS.PBCH5G	SAS.PBCH1G
Coyote Brown	SAS.CBR5G	SAS.CBR1G	SAS.PCBR5G	SAS.PCBR1G
Mahogany	SAS.MAH5G	SAS.MAH1G	SAS.PMAH5G	SAS.PMAH1G
Burnt Sienna	SAS.BUS5G	SAS.BUS1G	SAS.PBUS5G	SAS.PBUS1G
Light Brown	SAS.LIB5G	SAS.LIB1G	SAS.PLIB5G	SAS.PLIB1G
Medium Brown	SAS.MEB5G	SAS.MEB1G	SAS.PMEB5G	SAS.PMEB1G
Dark Brown	SAS.DAB5G	SAS.DAB1G	SAS.PDAB5G	SAS.PDAB1G
Red Wood	SAS.REW5G	SAS.REW1G	SAS.PREW5G	SAS.PREW1G
Tuscan Red	SAS.TUR5G	SAS.TUR1G	SAS.PTUR5G	SAS.PTUR1G
Rust	SAS.RUS5G	SAS.RUS1G	SAS.PRUS5G	SAS.PRUS1G
Sedona	SAS.SED5G	SAS.SED1G	SAS.PSED5G	SAS.PSED1G
Wine	SAS.WIN5G	SAS.WIN1G	SAS.PWIN5G	SAS.PWIN1G
Plum	SAS.PLU5G	SAS.PLU1G	SAS.PPLU5G	SAS.PPLU1G
Charcoal	SAS.CHA5G	SAS.CHA1G	SAS.PCHA5G	SAS.PCHA1G
Black	SAS.BLA5G	SAS.BLA1G	SAS.PBLA5G	SAS.PBLA1G
Grey	SAS.GRE5G	SAS.GRE1G	SAS.PGRE5G	SAS.PGRE1G
Red	SAS.RED5G	SAS.RED1G	SAS.PRED5G	SAS.PRED1G
Bahama Breeze	SAS.BAS5G	SAS.BAS1G	SAS.PBAS5G	SAS.PBAS1G
Steel Blue	SAS.STB5G	SAS.STB1G	SAS.PSTB5G	SAS.PSTB1G
Royal Blue	SAS.ROB5G	SAS.ROB1G	SAS.PROB5G	SAS.PROB1G
Emerald	SAS.EME5G	SAS.EME1G	SAS.PEME5G	SAS.PEME1G
Teal	SAS.TEA5G	SAS.TEA1G	SAS.PTEA5G	SAS.PTEA1G
Evergreen	SAS.EVE5G	SAS.EVE1G	SAS.PEVE5G	SAS.PEVE1G



# SASE® CONCRETE DYE



## SASE® Concrete Dyes

Dye Color	SureLock Liquid Concentrate		Classic Powder Dye	
	5 Gallon (Makes 5 gallons)	1 Gallon (Makes 1 gallon)	5 Gallon (Makes 5 gallons)	1 Gallon (Makes 1 gallon)
Gold	AP.SLGOLD5G	AP.SLGOLD1G	AP.ABGOLD5G	AP.ABGOLD1G
Raw Sienna	AP.SLRASI5G	AP.SLRASI1G	AP.ABRASI5G	AP.ABRASI1G
Sand	AP.SLSAND5G	AP.ALSAND1G	AP.ABSAND5G	AP.ABSAND1G
Carmel	AP.SLCARA5G	AP.SLCARA1G	AP.ABCARA5G	AP.ABCARA1G
Saddle Brown	AP.SLSABR5G	AP.SLSABR1G	AP.ABSABR5G	AP.ABSABR1G
Burnt Sienna	AP.SLBUSI5G	AP.SLBUSI1G	AP.ABBUSI5G	AP.ABBUSI1G
Chocolate Brown	AP.SLCHBR5G	AP.SLCHBR1G	AP.ABCHBR5G	AP.ABCHBR1G
Walnut	AP.SLWALN5G	AP.SLWALN1G	AP.ABWALN5G	AP.ABWALN1G
Mahogany	AP.SLMAHO5G	AP.SLMAHO1G	AP.ABMAHO5G	AP.ABMAHO1G
Terra Cotta	AP.SLTECO5G	AP.SLTECO1G	AP.ABTECO5G	AP.ABTECO1G
Chesnut	AP.SLCHES5G	AP.SLCHES1G	AP.ABCHES5G	AP.ABCHES1G
Maroon	AP.SLMARO5G	AP.SLMARO1G	AP.ABMARO5G	AP.ABMARO1G
Sepia	AP.SLSEPI5G	AP.SLSEPI1G	AP.ABSEPI5G	AP.ABSEPI1G
Eggplant	AP.SLEGGP5G	AP.SLEGGP1G	AP.ABEGGP5G	AP.ABEGGP1G
Black	AP.SLBLAC5G	AP.SLBLAC1G	AP.ABBLAC5G	AP.ABBLAC1G
Midnight Black	AP.SLMIBL5G	AP.SLMIBL1G	AP.ABMIBL5G	AP.ABMIBL1G
Grey	AP.SLGRAY5G	AP.SLGRAY1G	AP.ABGREY5G	AP.ABGREY1G
Red	AP.SLREDD5G	AP.SLREDD1G	AP.ABRED5G	AP.ABRED1G
Turquoise	AP.SLTURQ5G	AP.SLTURQ1G	AP.ABTURQ5G	AP.ABTURQ1G
Slate Blue	AP.SLSLBL5G	AP.SLSLBL1G	AP.ABSLBL5G	AP.ABSLBL1G
Patriot Blue	AP.SLPABL5G	AP.SLPABL1G	AP.ABPABL5G	AP.ABPABL1G
Green	AP.SLGREE5G	AP.SLGREE1G	AP.ABGREE5G	AP.ABGREE1G
Pine Green	AP.SLPIGR5G	AP.SLPIGR1G	AP.ABPIGR5G	AP.ABPIGR1G
Forest Green	AP.SLFRGR5G	AP.SLFRGR1G	AP.ABFRGR5G	AP.ABFRGR1G

## SWISSMEX 2.4 GALLON SPRAYER

The Swissmex Sprayer is acetone approved and will have the necessary seals to keep up with continuous use when using for solvent and water-based chemicals. It also comes with a grey spray tip to get started applying SASE chemicals.



### FEATURES

- Sprayer comes with grey tip
- Variety of sprayer tips available (sold separately)
- Heavy-duty construction grade
- Designed specifically for applying acetone and other solvent-based chemicals and most alcohol and ammonia-based products

### TECHNICAL DATA

<b>Item #</b>	SAS.ACE.SPRAY
<b>Flow Rate</b>	4.2 - 12.6 gallon per hour
<b>PSI</b>	40 PSI Max

## SWISSMEX SPRAY TIPS

The Swissmex Sprayer has a variety of spray tips to control flow rate. This can be helpful with certain chemicals where the flow rate should be adjusted specifically for maximum coverage and efficiency.




Item #	Product
AP.TXVK4	Swissmex Spray Tip - Green
AP.TXVK6	Swissmex Spray Tip - Red
AP.TXVK8	Swissmex Spray Tip - Grey
AP.TXVK10	Swissmex Spray Tip - Black
AP.TXVK12	Swissmex Spray Tip - Brown
AP.TIP8027	Swissmex Spray Tip - Retainer Cup



## HANDLES / MICROFIBER HEADS & PADS / SQUEEGEE

SASE® stocks handles and heads for microfiber pads and squeegees to help with applying chemicals and dust and water containment.

Item #	Product	Description
SAS.MOPPOLE	70" Handle	70" Telescoping handle
SAS.36MOP.FRAME	36" Mop Head	36" Head with Velcro (hook)
SAS.MOPFRAME	20" Mop Head	20" Head with Velcro (hook)
SAS.36.MOPPAD	36" Microfiber Pad	36" Microfiber Pad with Velcro (loop)
<b>SAS.20.MOPPAD</b>	20" Microfiber Pad	20" Microfiber Pad with Velcro (loop)
SAS.SQUEEGEE	30" Foam Squeegee End	30" Heavy-duty Foam Rubber Squeegee

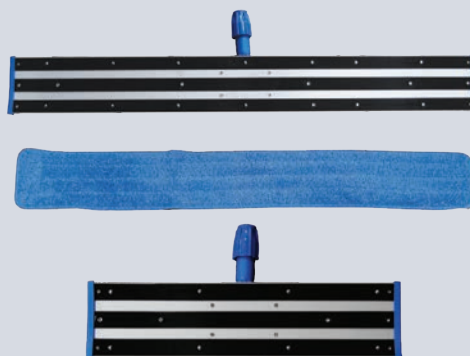



# SASE® SLURRY MANAGEMENT SOLUTIONS

SASE® is always on the cutting edge on industry trends and understand that wet grinding is growing as well as the pain of dealing with concrete slurry. SASE® has a complete system to help with slurry management with four products.



SLR.SRSEP



SLR.SRDRY



SLRSRSF5

## SLURRYSEP FLOC

SlurrySep works by using chemical components to separate and suspend solids allowing water to freely seep through the Slurry Bag for clean, environmentally friendly disposal or even reuse!

- Replaces high collection, handling, hauling and disposal costs
- Protection from environmental fines
- Rapid separation of suspended concrete in water allowing recycling of water or compliant disposal

### FEATURES

## SLURRY DRY SSG

SlurryDry works by accelerating the evaporation time, transforming slurry into a dry, solid immediately ready for environmentally friendly disposal.

### FEATURES

- Only adds 1/3% to waste volume for decreased hauling costs
- Solidifies immediately reducing process time
- Absorbs 200-300 times its weight in high pH wastewater
- Non-hazardous and environmentally friendly solution for solidification of cement fines and slit

## SLURRYSAFE AR

SlurrySafe AR works by neutralizing the pH of slurry as well as breaking it down, allowing tooling and equipment to be cleaned with a 100% biodegradable, environmentally friendly product.

### FEATURES

- Triple zero hazardous material score
- 100% biodegradable
- Non-toxic, non-fuming, no VOC's
- Safe on pumps, pipes and most metals
- De-scales and eliminates foulants and rust
- High pH neutralizer

## SLURRY DEWATER FILTER BAGS

SLR.DWBAG

Slurry Dewater Filter Bags work in conjunction with SlurrySep Floc to separate the liquids from the solids by suspending the slurry bags so the liquids can filter through leaving mostly solids in the Slurry Bag. Then SlurryDry SSG is used to accelerate the evaporation time, transforming slurry into a dry, solid. The Slurry Bags are simple and easy to use and take the headache out of dealing with slurry!

Picture shown is a Slurry Dewater Filter Bag that has been removed from a Slurry Bin (sold separately)\* and ready for disposal - Slurry Bin construction instructions available upon request or at [SASECompany.com](http://SASECompany.com).



# NEEDLE SCALERS



# NEEDLE SCALERS

## SC49 NEEDLE SCALER



### FEATURES

- Heavy-duty needle scaler that works quickly for the toughest jobs
- Various needle sizes & configurations
- Optional dust shroud with brush guards available

### TECHNICAL DATA

<b>Item #</b>	SAS.SC.49CS4 (4mm)
<b>Power</b>	Compressed Air (recommended 40 - 45 gallon Tank)
<b>PSI</b>	75 - 100
<b>CFM</b>	5.5
<b>Tool Weight</b>	11 lbs (5 kg)
<b>Item #</b>	SAS.SC.49CS (3mm)

## SC28 AVS NEEDLE SCALER



### FEATURES

- Lightweight but powerful in quickly cleaning & resurfacing metal & concrete
- Anti-vibration (AVS) for less operator fatigue
- Various needle sizes & configurations
- Optional dust shroud with brush guards available

### TECHNICAL DATA

<b>Item #</b>	SAS.SC.28AVS4 (4mm)
<b>Power</b>	Compressed Air (recommended 30 - 35 gallon Tank)
<b>PSI</b>	75 - 100
<b>CFM</b>	4.3
<b>Tool Weight</b>	7.5 lbs (3.4 kg)
<b>Item #</b>	SAS.SC28AVS (3mm)
<b>Item #</b>	SAS.SC.28AVS2 (2mm)



# NEEDLE SCALERS

## SC28 NEEDLE SCALER



## FEATURES

- Lightweight but powerful in quickly cleaning & resurfacing metal & concrete
- Various needle sizes & configurations
- Optional dust shroud with brush guards available

## TECHNICAL DATA

<b>Item #</b>	SAS.SC28CS4 (4mm)
<b>Power</b>	Compressed Air (recommended 30 - 35 gallon Tank)
<b>PSI</b>	75 - 100
<b>CFM</b>	4.3
<b>Tool Weight</b>	6.5 lbs (3 kg)
<b>Item #</b>	SAS.SC.28CS (3mm)
<b>Item #</b>	SAS.SC.28CS2 (2mm)

## PARTS & ACCESSORIES

### Needles

Item #	Product	Used With
SAS.SC.036	2mm Needles Blunt End (65) Set	SC28, SC28AVS, 34B & NP34
SAS.SC.037	3mm Needles Chisel Point (28) Set	SC28, SC28AVS, 34B & NP34
SAS.SC.038	4mm Needles Chisel Point (19) Set	SC28, SC28AVS, 34B & NP34
SAS.SC.039	3mm Needles Chisel Point (49) Set	SC49 & 45B
SAS.SC.040	4mm Needles Chisel Point (35) Set	SC49 & 45B

### Needle Holders

Item #	Product	Used With
SAS.SC.018	2mm Needle Holder 34 & 28 Series	Used with SC28, SC28AVS, 34B & NP34
SAS.SC.019	3mm Needle Holder 34 & 28 Series	Used with SC28, SC28AVS, 34B & NP34
SAS.SC.020	4mm Needle Holder 34 & 28 Series	Used with SC28, SC28AVS, 34B & NP34
SAS.SC.031	3mm Needle Holder 45 & 49 Series	Used with SC49 & 45B
SAS.SC.053	4mm Needle Holder 45 & 49 Series	Used with SC49 & 45B

### Needle Shrouds

Item #	Product	Used With
554.00.VC	Needle Shroud Complete 34 & 28 Series	Used with SC28, SC28AVS, 34B & NP34

### Needle Brushes

Item #	Product	Used With
550.00.00	Needle Brush Long / Vacuum 23	Used with SC28, SC28AVS, 34B & NP34
550.00.01	Needle Brush Short / Vacuum 23	Used with SC28, SC28AVS, 34B & NP34
550.00.02	Needle Brush Short / Vacuum	Used with SC49 & 45B

# SPARE PARTS

## Concrete Repair Miscellaneous Items / Poly Pump 10 Spare Parts

Item #	Description	Fits
SAS.APP22OZ	Applicator Tool	22oz Cartridge
SAS.PMP.003	Blue Nozzle, Cartridge	22oz Cartridge
SAS.PMP.004	Flow Restrictor	All Spall 3 & EZ-Fill Pro
SAS.PMP.005	Flow Restrictor (Blue)	Flo-Mender
SAS.PMP.002	Nozzle	Poly Pump 10
SAS.PMP.006	Nut, Manifold	Poly Pump 10

## Belts

Item #	Description	Fits
PDG.83226.70	Belt green, 4/3VP 450 Gates	PDG 8000 Propane
PDG.83226.30	Belt green, 3/3VP 450 Gates	PDG 8000 Propane
PDG.80039.00	Belt, PK21 Bottom	PDG 8000
PDG.80040.00	Belt, PK6 Middle	PDG 8000
PDG.80041.00	Belt, PK10 Upper	PDG 8000
PDG.60056.00	Belt, PK12 Bottom	PDG 6000
PDG.60057.00	Belt, PK6 PTO Middle	PDG 6000
PDG.60058.00	Belt, PK8 Top	PDG 6000
HG.10300	HTC 950 RX & 800 HDX Upper Belt	HTC 950 RX & 800 HDX
HG.10301	HTC 950 RX Lower Belt	HTC 950 RX
HG.10302	HTC 800 HDX Upper Belt	HTC 800 HDX
HG.10304	HTC 800 Classic Upper Belt	HTC 800 Classic
HG.10305	HTC 800 Classic Lower Belt	HTC 800 Classic
HG.10306	HTC 800 HD & E Upper Belt	HTC 800 HD & E
HG.10307	HTC 800 HD Lower Belt	HTC 800 HD
HG.10308	HTC 800 E Lower Belt	HTC 800 E
HG.10309	HTC 800 Old Upper Belt	HTC 800
HG.10310	HTC 800 Old Lower Belt	HTC 800
HG.10313	HTC 650 Upper Belt	HTC 650
HG.10314	HTC 650 Lower Belt	HTC 650
HG.10315	HTC 500 Upper New Hub	HTC 500
HG.10321	HTC 130 V Belt	HTC 130
HOL.U11928	Diamatic 535 Lower Belt	Diamatic 535
HOL.U11904	Diamatic Middle Belt	Diamatic 535, 580, 720
HOL.U11924	Diamatic Upper Belt	Diamatic 535, 580, 720 and 780 Pro
HOL.U11952	Diamatic Middle Belt	Diamatic 780 Ultra
HOL.800403	Diamatic Lower Belt	Diamatic 780 Ultra, 780 Pro
HOL.U11905	Diamatic Lower Belt	Diamatic 720, 580
HOL.U11980	Diamatic Middle Belt	Diamatic 780 Pro

# SPARE PARTS

## SKF Bearings

Item #	Description	Required Amount	Fits
HG.10200	6312 2RS-C3 800 HD	6	HTC 800 HD
HG.10201	6314 2RS-C3 800 HD	1	HTC 800 HD
HG.10202	6207 2RS-C3 950/800/650	5	HTC 950 RX, 800 HD, 650
HG.10203*	6205 2RS-C3 500 (old style)	8	HTC 500
HG.10204*	6010 2RS-C3 800/500 (old style)	3	HTC 800, 500
HG.10205*	6005 2RS-C3 500 (hub style)	3 (hub style) / 4 (old style)	HTC 500
HG.10206	6012 2RS-C3 500 Main (both styles)	1	HTC 500
HG.10207*	6017 2RS-C3 800 Classic HDX	2	HTC 800 Classic
HG.10208	6004 2RS-C3 130	2	HTC 130

\*Special order item

## Seals

Item #	Description	Required Amount	Fits
HG.10209	VA-25 800 HD	3	HTC 800 HD
HG.10210	20 By 35 By 7 TC 800 HD	3	HTC 800 HD
HG.10211	60 By 75 By 8 TC 800 HD	3	HTC 800 HD
HG.10212	20 By 47 By 7 TC 800 HD	3	HTC 800 HD

## Spring Sets

Item #	Description	Required Amount	Fits
HG.10400	800 HD & E Spring Set Kit 3 Hole	3	HTC 800 HD, E
HG.10401	800 Classic Spring Set Kit 1 Hole	4	HTC 950 RX, 800 HDX
HG.10409	800 Ultra Thick Spring Set Kit 3 Hole	3	HTC 800 HD, E
HG.10410	800 Ultra Thick Spring Set Kit 1 Hole	3	HTC 800 Classic

## Shaft Journals

Item #	Description	Required Amount	Fits
HG.10501	800 HD Shaft Journal	3	HTC 800 HD

## Power Cords

Item #	Description	Fits
AIW.6X4CORD	6/4 Cord	3 Phase / 460 Volt Floor Grinders & Dust Extractors
AIW.8X4CORD	8/4 Cord	3 Phase / 230 Volt Floor Grinders & Dust Extractors
AIW.4X4CORD	4/4 Cord for Distances greater than 200'	



# SPARE PARTS

## Vacuum Filters & Parts

Item #	Description	Fits
NWA.800EBS	HEPA Filter, Bull 1250 EBS	Bull 1250 EBS
NWA.80010	Sock Filter, Bull 1250	Bull 1250
NWA.80020	HEPA Filter, Bull 1250	Bull 1250
NWA.00090	Sock Filter, Bull 300 / 1250 EBS	Bull 300 / 1250 EBS
NWA.00093	Inline Filter, Bull 300	Bull 300
SAS.90048	Sock Filter, Bull 240	Bull 240
SAS.90052	HEPA Filter, Bull 240	Bull 240
SAS.240.FILTER	HEPA Filter Cartridge, Bull 240 C	Bull 240 C
SAS.90049	Wheel, Front Swivel	Bull 240 C
SAS.90050	Wheel, Rear Solid Wheel	Bull 240 C
SAS.240.MOTOR	Motor for Bull 240 C	Bull 240 C
SAS.2007.00531	Soft Start	Bull 240 C
VAC.240.01	Anti-static Conical Filter Cartridge	Bull 240 EBS
VAC.240.02	60 HEPA Toray Filter Cartridge	Bull 240 EBS
VAC.240.03	Ametek Carbon Brush Motor	Bull 240 EBS
VAC.240.04	Timer	Bull 240 EBS
VAC.240.05	V3 Water Proof Switch	Bull 240 EBS
VAC.240.06	Nylon Binding Tape	Bull 240 EBS
VAC.240.07	D50 Rubber, Anti-Static Soft Connector	Bull 240 EBS
VAC.240.08	VFG-S Silicone Seals	Bull 240 EBS
VAC.240.09	CB Motor Ring	Bull 240 EBS
VAC.240.10	CB Tripod Cover	Bull 240 EBS
VAC.240.11	Through-hole M8 Star Handle	Bull 240 EBS
VAC.240.12	Star Handle-M5 Thread Rod	Bull 240 EBS
VAC.240.13	Vacuum Pressure Gauge	Bull 240 EBS
VAC.240.14	4" M12 Universal Wheel	Bull 240 EBS
VAC.240.15	8" Non-trace Caster Wheel	Bull 240 EBS
VAC.240.16	30*30 Pipe Plug	Bull 240 EBS
SAS.45BAND	Rubber Band, Bull 45 Never Clog Bag	Bull 45
SAS.NCBAG	Bag Filter (cloth), Bull 45 Never Clog Bag	Bull 45
SAS.45HEPA	Filter, Cloth	Bull 45
SAS.45BAG	Bag, Paper Filter Bull 45	Bull 45

# SPARE PARTS

## Plugs / Cord Ends

Item #	Description
SAS.HBL2621	Plug, Male 230 volt, Single Phase
SAS.HBL2623	Plug, Female 230 volt, Single Phase
SAS.CS8365C	Plug, Male 230 volt, Three Phase
SAS.CS8364C	Plug, Female 230 volt, Three Phase
SAS.CS8165C	Plug, Male 460 volt, Three Phase
SAS.CS8164C	Plug, Female 460 volt, Three Phase

## Miscellaneous Floor Grinder Parts

Item #	Description	Fits
PDG.20104.25	Shamrock Plate Lock Assembly	PDG 8000 & PDG 6000
PDG.80028.02	Aluminum Top Plate	PDG 8000
PDG.80027.02	Aluminum Bottom Plate	PDG 8000
PDG.80029.60	Aluminum Stationary Sheave	PDG 8000
PDG.20106.00	Rubber Post 70 Duro (Hard)	PDG 8000 & PDG 6000
PDG.20106.01	Rubber Post 60 Duro (Soft)	PDG 8000 & PDG 6000
NB.13.216	Screw, M8-1.25x16 Flat Head Socket Cap	PDG 8000 & PDG 6000

## Edge Pro 180 Parts

Item #	Description
DG.1313	Coupler, Flex Lovejoy
DG.1398	Bearing, Tapered Roller Timken 30303
DG.1399	Seal, Lip 50x30x8
DG.1420	Pulley, M8 20mm Wide, 38 Tooth
DG.1404	Sleeve
DG.1446	Disc
DG.1492	Disc with Vulcanized Velcro - New
DG.1444	Motor Controller KBVF-26DGFCI
DG.1358	Controller Enclosure

# SPARE PARTS

## Floor Scraper Belts

Item #	Description	Fits
OEM.LE024	Belt, Set of 3, Lightning	SASE Lightning
OEM.HUE035	Belt, Set of 3, Hurricane	SASE Hurricane
OEM.LE044	Belt, Set of 2, Lightning	SASE Lightning

## Miscellaneous Scaler Parts

Item #	Description	Fits
SAS.SC054	Plate, Needle Holder 3mm	SC28, SC28AVS
SAS.SC.017	Spring, Return 34B, NP34	SC28, SC28AVS
SAS.SC.027	Spring, Rear NP 34	SC28, SC28AVS
SAS.SC.034	Spring, Return 45B	SC49
SAS.SC.052	Seal, Piston NP 34/MH	SC28AVS
SAS.SC.010	Body, Pistol 34B SC28	SC28
SAS.SC.011	Tube, Round Front 34	SC28, SC28AVS
SAS.SC.013	Cover, Screwed	SC28
SAS.SC.014	Ring, Internal Retaining M 34 x 1.5	SC28
SAS.SC.015	Screw, Socket Head Cap 5/16-18 x 1.0	SC28, SC28AVS, SC49
SAS.SC.016	Anvil, 24 Series	SC28, SC28AVS
SAS.SC.021	Body, Complete Valve 23-45	SC28, SC28AVS, SC49
SAS.SC.022	Grip, Rubber Handle	SC28, SC28AVS, SC49
SAS.SC.051	Ring, Internal Retaining M37 x 1.5	SC49
SAS.SC.050	Cover, Screwed	SC49
SAS.SC.032	Tube, Round Front 45 Series	SC49
SAS.SC.033	Anvil, 45 Series	SC49
SAS.SC.035	Piston, 45B	SC49
SAS.SC.030	Body, Pistol 45B	SC49

## SC320 Parts

Item #	Description	Fits
SAS.320BELT	Belt CT 320	SC320
SC.12.700	Rubber Sealing Rear	SC320
SC.12.800	Rubber Sealing Front	SC320
SC.12.650	Dust Hose 50mm D Black	SC320
SAS.6163	Bearing Right	SC320




# SPARE PARTS


## Scarifier Shafts, Belts, Bearing & Other Parts

Item #	Description	Fits
SC.08.510	Flail Shaft, 12mm	SC8E, FR200
SC.10.510	Flail Shaft, 9/16" for 10" Ultra Drum	SC10E, VA25S
633.04.02	Flail Shaft, 12mm	VA25S
SC.12.500	Flail Shaft, 20mm for 4 Shaft Drum	SC12E, VA30S
SC.08.500	Drum Without Cutters	SC8E, FR200
SC.10.505	Drum Without Cutters	SC10E, VA25S
SC.12.505	Drum Without Cutters	SC12E, VA30S
SC.08.119	Belt, Toothed	SC8E, FR200, 640 Gas
SC.10.117	Belt, Toothed	SC10E, VA25S, 880 Gas
SC.12.117	Belt, Toothed	SC12E, VA30S, 1040 Gas
SC.08.604	Bearing, End-plate	SC8E, FR200, 6006-2RS
SC.10.604	Bearing, End-plate	SC10E, VA25S, SC12E, VA30S, 6210-2RS
SC.08.404	Bearing, Drive-side	SC8E, FR200, 6303-2RS
SC.10.404	Bearing, Drive-side	SC10E, VA25S, 6207-2RS
SC.12.404	Bearing, Drive-side	SC12E, VA30S, 6307-2RS
SC.08.401	Shaft, Hexagonal	SC8E, FR200
NB.70.111	Key, Woodruff for Hexagonal Shaft	SC8E, FR200
SC.10.401	Shaft, Hexagonal	SC10E, VA25S
NB.70.115	Key, Woodruff for Hexagonal Shaft	SC10E, VA25S
SC.12.401	Shaft, Hexagonal	SC12E, VA30S
SC.12.407	Key, Woodruff for Hexagonal Shaft	SC12E, VA30S
SC.08.901	Wheel, Front	SC8E, FR200
SC.10.901	Wheel, Front	SC10E, VA25S, SC12E, VA30S
SC.08.803	Wheel, Rear	SC8E, FR200
SC.10.803	Wheel, Rear	SC10E, VA25S, SC12E, VA30S
SC.08.115	Pulley, Upper for Gas Models	SC8E, FR200
SC.10.156	Pulley, Upper for Gas Models	SC10E, VA25S
SC.12.156	Pulley, Upper for Gas Models	SC12E, VA30S
SC.08.203	Pulley, Lower	SC8E, FR200
SC.10.403	Pulley, Lower	SC10E, VA25S
SC.12.403	Pulley, Lower	SC12E, VA30S
SC.10.121	Pulley, Tightening	SC10E, VA25S
SC.12.121	Pulley, Tightening	SC12E, VA30S
SC.12.808	Plate, Joint	SC12E, VA30S
NB.20.112	Nut, Shaft	SC8E, FR200
NB.30.218	Washer, Safety	SC8E, FR200
SC.08.118	Guard, Belt	SC8E, FR200
SC.10.206	Guard, Belt	SC10E, VA25S
SC.12.118	Guard, Belt	SC12E, VA30S


# TRANSIT INFO

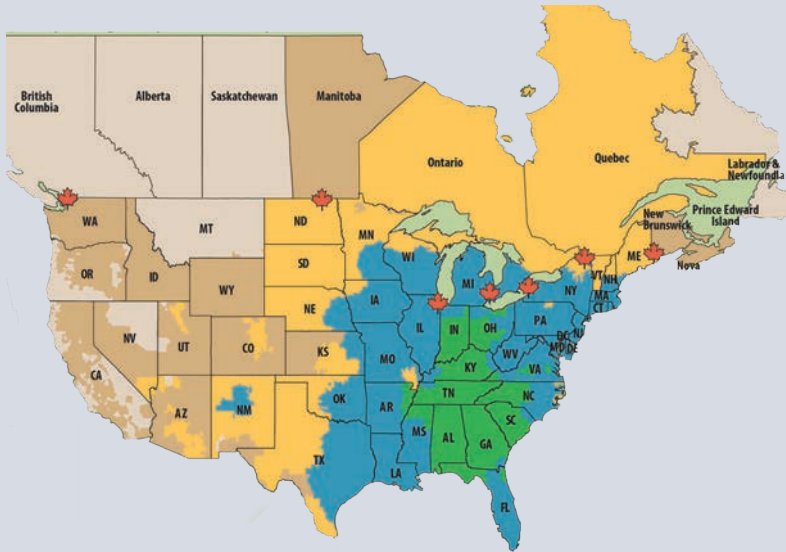

## R & L Carrier Ground Transit Times

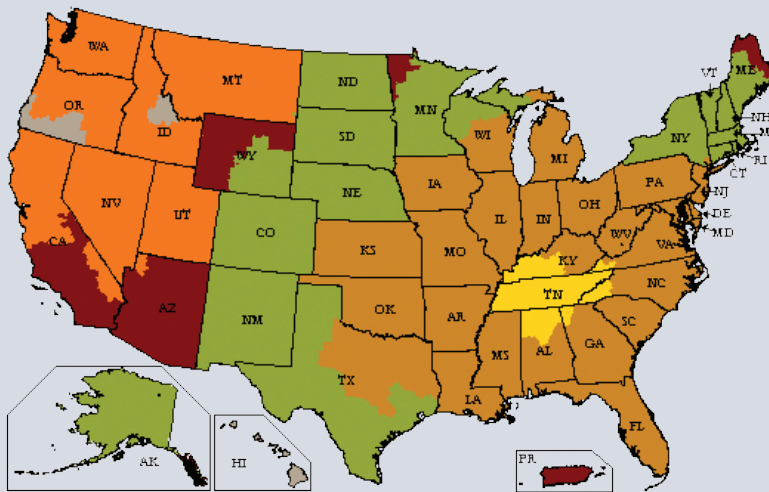


## UPS Ground Transit Times

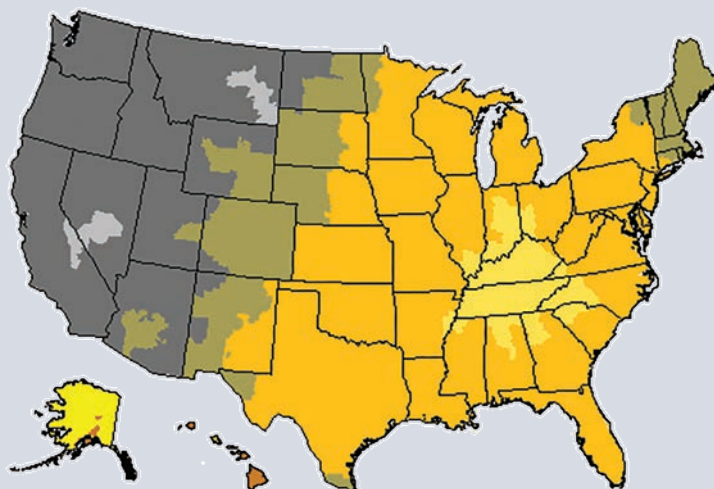


## FedEx Ground Transit Times



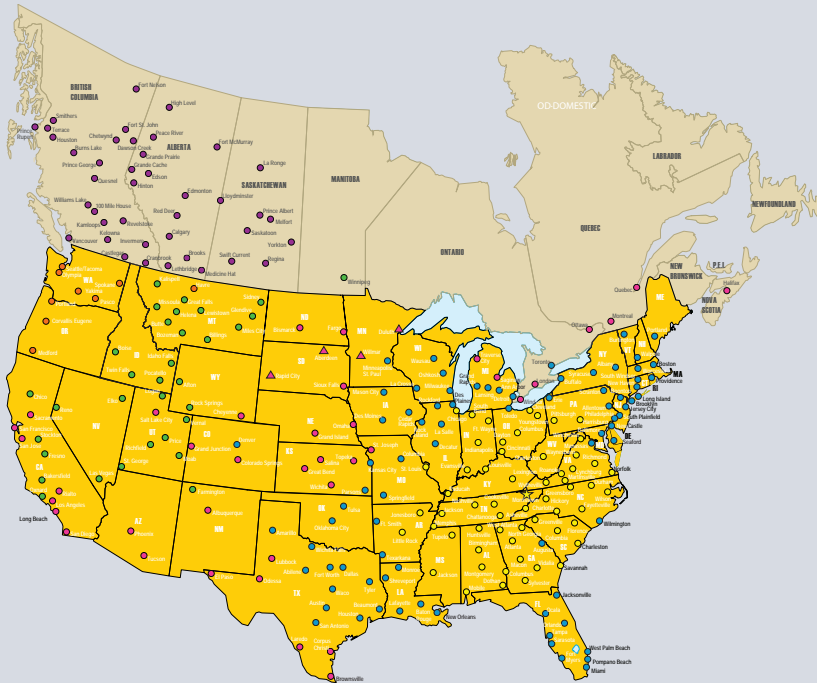


### Old Dominion Freight Transit Times

- 1 Day
- 2 Days
- 3 Days
- 4 Days
- 5 Days
- 6 Days

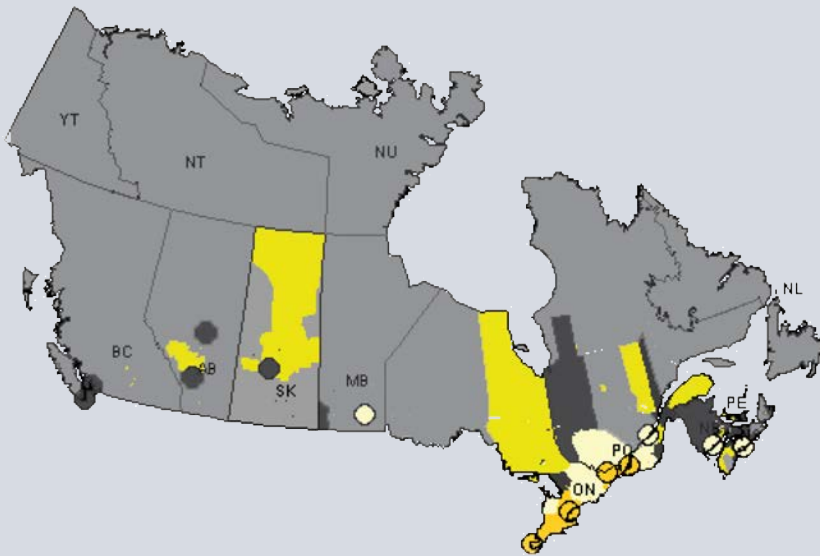

### FedEx Small Package Ground Service to Canada

- 3 Day
- 4 Days
- 5 Days
- 6 Days
- 7 Days

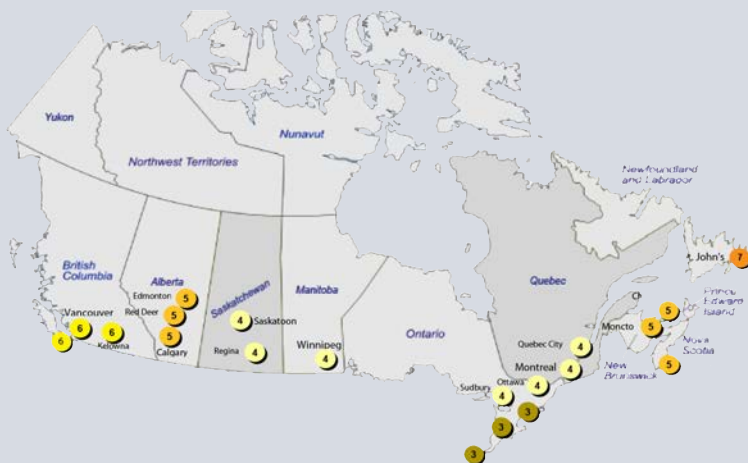

### UPS Standard Day in Transit to Canada

#### Parcel and Freight Shipment

The majority of our parcels are shipped via UPS. We offer FedEx on request. Rockford freight is shipped via Old Dominion & R & L Carriers. Kent freight is shipped via Holland.



# WARRANTY POLICY

**Included in this warranty are the following pieces of equipment:**

Diamond Grinders: PDG 9500 Plus, PDG 8000, PDG 8000 RX, PDG 8000 Propane PDG 6000, 6KP, PDG 5000, PDG 5000 Propane, PDG 3000, SHG 270 & Edge Pro 180  
Dust Extractors: Bull 1250 EBS, Bull 1250 EBS Propane, Bull 300 EBS, Bull 240 EBS

**Our Commitment to our customers:**

SASE<sup>®</sup> Company, LLC. (SASE<sup>®</sup>) equipment is warranted to be free of defects in workmanship and materials for a period of (1) year from original date of purchase. In the event that you should have a claim, SASE<sup>®</sup> shall repair, replace or remedy the defective parts resulting from the faulty design, materials or workmanship. Note: This warranty is only valid for equipment either sold by SASE<sup>®</sup> or by an authorized wholesaler or distributor.

**Limitations:**

Warranty does not apply to cosmetic damage due to lightning, electrical surges, fire, flood or other acts of God, accident, misuse, abuse, repair or alteration by other than factory service (unless service center was approved in writing by SASE<sup>®</sup>), negligence or improper or neglected maintenance as recommended by SASE<sup>®</sup>.

Common wear parts, such as belts, bearings, seals, filters, dust skirts, wheels, etc., are exempt from warranty.

SASE<sup>®</sup> is not responsible for loss of income or down time as a result of faulty design, materials or workmanship.

Warranty coverage is valid once a warranty registration card is filled out and returned to SASE<sup>®</sup>.

A \$100 labor charge may be assessed on the items returned for warranty repair in which no fault is found. Freight charges and associated fees will then become the responsibility of the customer in such an instance.

Damages which are caused during transportation are not covered under warranty. Such damaged claims should be filed with the freight carrier.

**Claims:**

In the unlikely event that you should experience a defect please contact your SASE<sup>®</sup> representative or a SASE<sup>®</sup> service technician by calling 1 (800) 522-2606. Please have all pertinent information readily available such as, invoice with date of purchase, model and serial number and an explanation of the issue. SASE<sup>®</sup> will respond immediately with a corrective action.

**Freight responsibility for approved warranty claims:**

If the piece of equipment was purchased within 90 days of warranty claim, SASE<sup>®</sup> will arrange for ground freight and will assume all ground freight charges to send the customer the parts required or to send the equipment to an authorized SASE<sup>®</sup> repair center. This includes inbound and outbound ground freight and all fees (duties, fuel surcharges) associated with the shipments. If the piece of equipment was purchased beyond the 90 days and prior to (1) year of warranty claim, SASE<sup>®</sup> will cover 50% of all ground freight charges, including inbound and outbound freight and all fees (duties & fuel surcharges) associated with the shipment.



**STOCKING & DISTRIBUTION**

170 Traders Blvd E,  
Mississauga, ON  
L4Z 1W7, Canada

**STOCKING & DISTRIBUTION**

200 Commerce Dr.  
Freehold, NJ 07728

**SALES, SERVICE, & DISTRIBUTION**

2475 Stock Creek Blvd.  
Rockford, TN 37853

**ASSEMBLY, MANUFACTURING, SALES, & DISTRIBUTION**

26423 79th Ave. S.  
Kent, WA 98032

**SALES, SERVICE, & DISTRIBUTION**

3340 Garden Brook Dr.  
Farmers Branch, TX 75234

**SALES, SERVICE, & DISTRIBUTION**

377 W Grove Ave.  
Orange, CA 92865



**1-800-522-2606**

**WWW.SASECOMPANY.COM**